

MB40578/40578-7

1-CHANNEL 8-BIT VIDEO A/D CONVERTER

1-CHANNEL 8-BIT VIDEO A/D CONVERTER (20 MSPS)

The Fujitsu MB40578 is a low power ultra-high speed video A/D converter fabricated with Fujitsu Advanced Bipolar Technology.

The MB40578 also adopts the fully-parallel comparison technique (flash method) for high speed conversion and can convert a wide-band analog signal (such as video signal) to a digital signal at a sampling rate of DC through 20 mega-samples/sec.


This high-speed operation makes the MB40578 suitable for digital video applications such as digital TV, computer video processing, and radar signal processing.

- Resolution: 8 bits
- Linearity Error: $\pm 0.2\%$ maximum (MB40578)
 $\pm 0.4\%$ maximum (MB40578-7)
- Maximum conversion Rate: 20 MSPS minimum
- Analog input voltage: 3.0V to 5.0V
- Digital I/O level: TTL compatible
- Single power supply: +5V
- Power dissipation: 480 mW typ.
- Package: Standard 22-pin DIP Package: Suffix: -P

ABSOLUTE MAXIMUM RATINGS (see Note)


Rating	Symbol	Value	Unit
Power supply voltage	V_{CCA} V_{CCD}	-0.5 to +7.0	V
Digital input voltage	V_{IND}	-0.5 to +7.0	V
Analog input voltage	V_{INA}	-0.5 to $V_{CC} + 0.5$	V
Analog reference voltage	V_{RB}	-0.5 to $V_{CC} + 0.5$	V
Clamp circuit input voltage	V_{INC}	-0.5 to $V_{CC} + 0.5$	V
Storage temperature	T_{STG}	-55 to +125	°C

Note : Permanent device damage may occur if the above Absolute Maximum Ratings are exceeded. Functional operation should be restricted to the conditions as detailed in the operational sections data sheet. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.



**PLASTIC PACKAGE
DIP-22P-M04**

PIN ASSIGNMENT

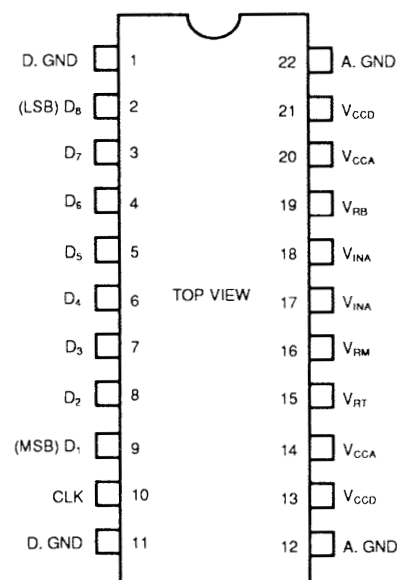

This device contains circuitry to protect the inputs against damage due to high static voltages or electric fields. However, it is advised that normal precautions be taken to avoid application of any voltage higher than maximum rated voltages to this high impedance circuit.

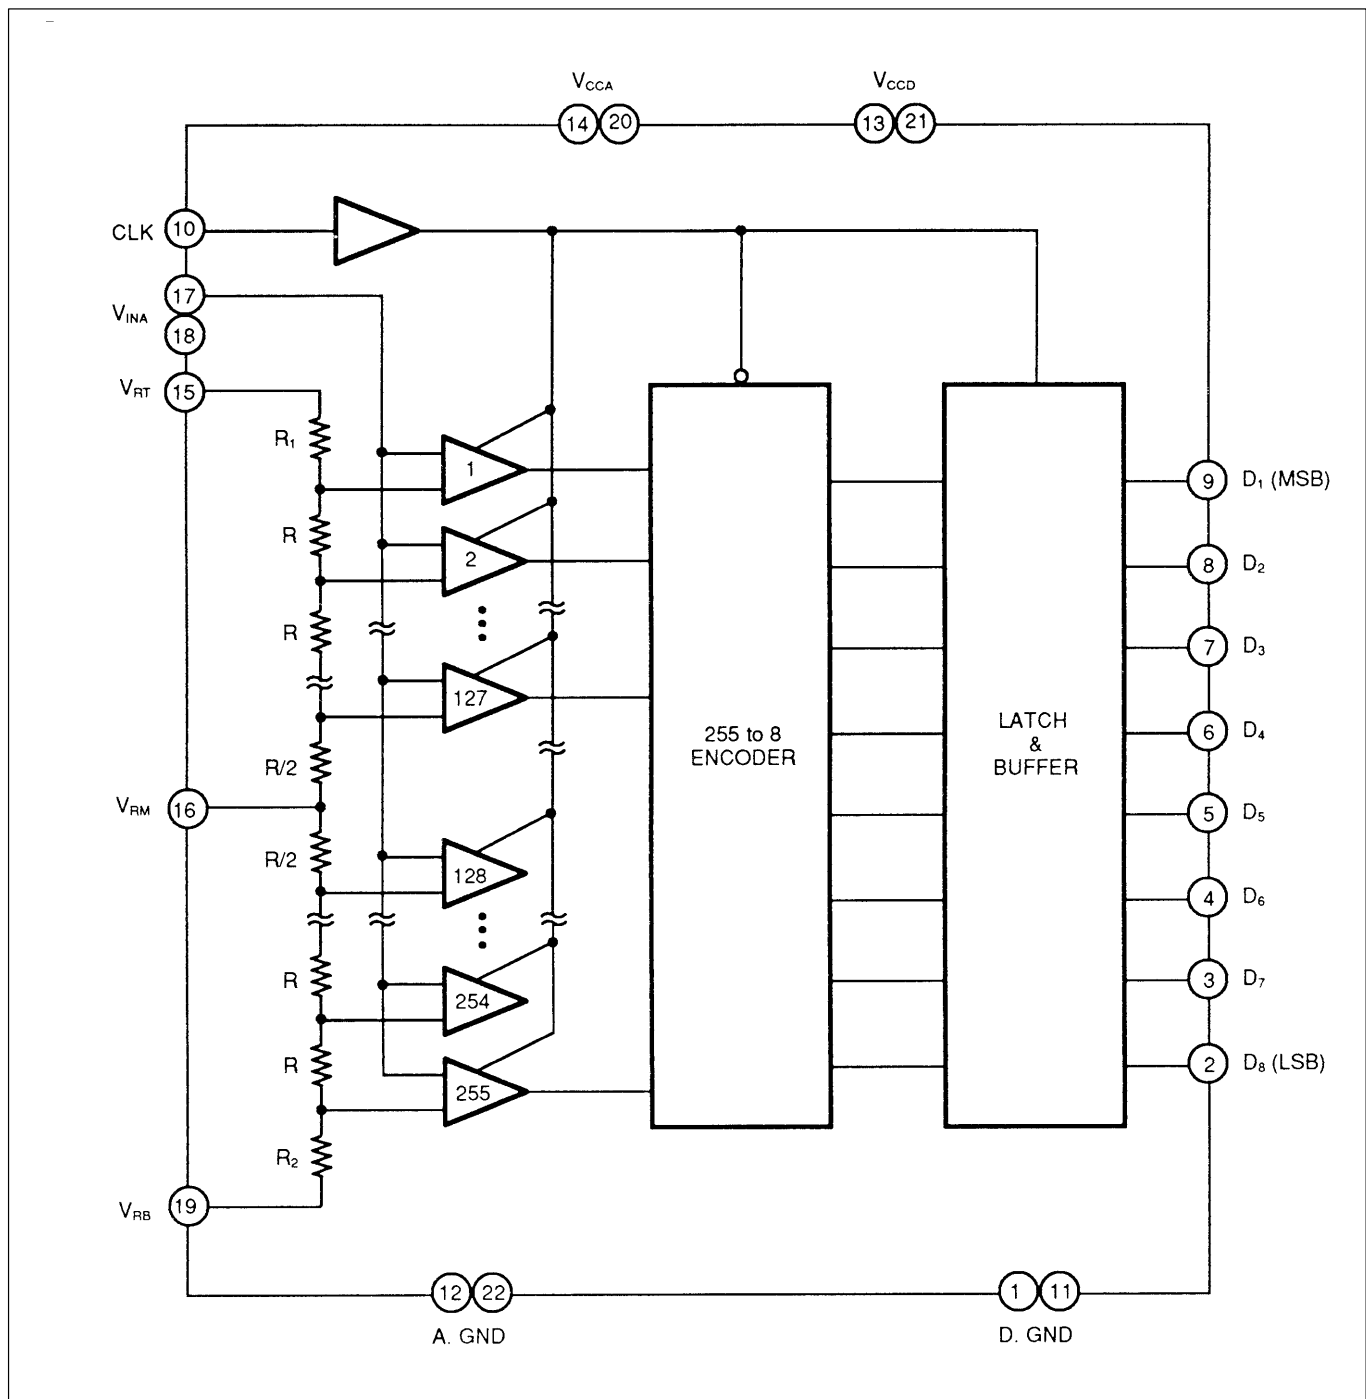


Figure 1. MB40578 Block Diagram

RECOMMENDED OPERATING CONDITIONS

Parameter	Symbol	Value			Unit
		Min	Typ	Max	
Power supply voltage ¹	V_{CCA} V_{CCD}	4.75	5.00	5.25	V
Analog input voltage ²	V_{INA}	3		5	V
Analog reference voltage (top side) ²	V_{RT}		5	5.1	V
Analog reference voltage (bottom side) ²	V_{RB}	2.9	3		V
Digital high-level output current	I_{OHD}	−400			μA
Digital low-level output current	I_{OLD}			4	mA
Clock pulse width at high level	t_{W+}	25			ns
Clock pulse width at low level	t_{W-}	25			ns
Operating temperature	T_A	0		70	°C

Notes: ¹ Keep V_{CCA} and V_{CCD} at the same potential.
² $V_{RB} < V_{INA} < V_{RT}$; $V_{RT} - V_{RB} = 2V \pm 0.1V$

ELECTRICAL CHARACTERISTICS

ANALOG DC CHARACTERISTICS

($V_{CC}=4.75$ to $5.25V$, $T_A=0$ to $70^{\circ}C$)

Parameter		Symbol	Condition	Value			Unit
				Min	Typ	Max	
Resolution						8	bits
Linearity error	MB40578	LE	DC			± 0.2	%
	MB40578-7					± 0.4	
Equivalent analog input resistance		R_{INA}		50			$k\Omega$
Analog input capacitance		C_{INA}			120	230	pF
Analog high-level input current		I_{IHA}				150	μA
Analog low-level input current		I_{ILA}				145	μA
Reference current		I_{RB}	$V_{RT} = 5V$, $V_{RB} = 3V$	-15	-9		mA

DIGITAL DC CHARACTERISTICS

($V_{CC}=4.75$ to $5.25V$, $T_A=0$ to $70^{\circ}C$)

Parameter		Symbol	Condition	Value			Unit
				Min	Typ	Max	
High-level output voltage		V_{OHD}	$I_{OH} = -400 \mu A$	2.7			V
Low-level output voltage		V_{OLD}	$I_{OL} = 1.6 \text{ mA}$			0.4	V
High-level input voltage		V_{IHD}		2.0			V
Low-level input voltage		V_{ILD}				0.8	V
Maximum input current		I_{ID}	$V_{ID} = 7V$			100	μA
High-level input current		I_{IHD}	$V_{IHD} = 2.7V$		0	20	μA
Low-level input current		I_{ILD}	$V_{ILD} = 0.4V$	-400	-40		μA
Power supply current		I_{CC}			40*	85	mA

SWITCHING CHARACTERISTICS

($V_{CC} = 5V$, $T_A=0$ to $25^{\circ}C$)

Parameter	Symbol	Value			Unit
		Min	Typ	Max	
Maximum conversion rate	FS	20	30		MSPS
Digital output delay time	t_{pd}	5	15	40	ns

ELECTRICAL CHARACTERISTICS, continued

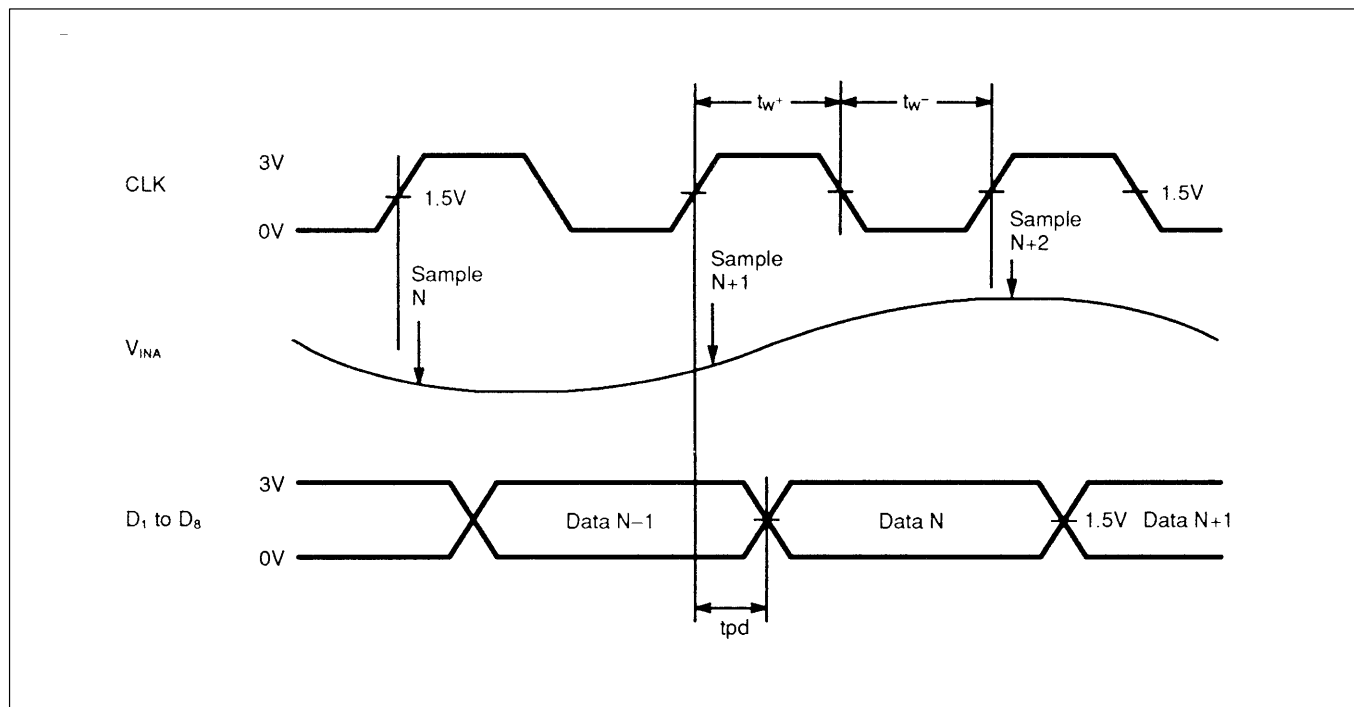


Figure 2. Timing Diagram

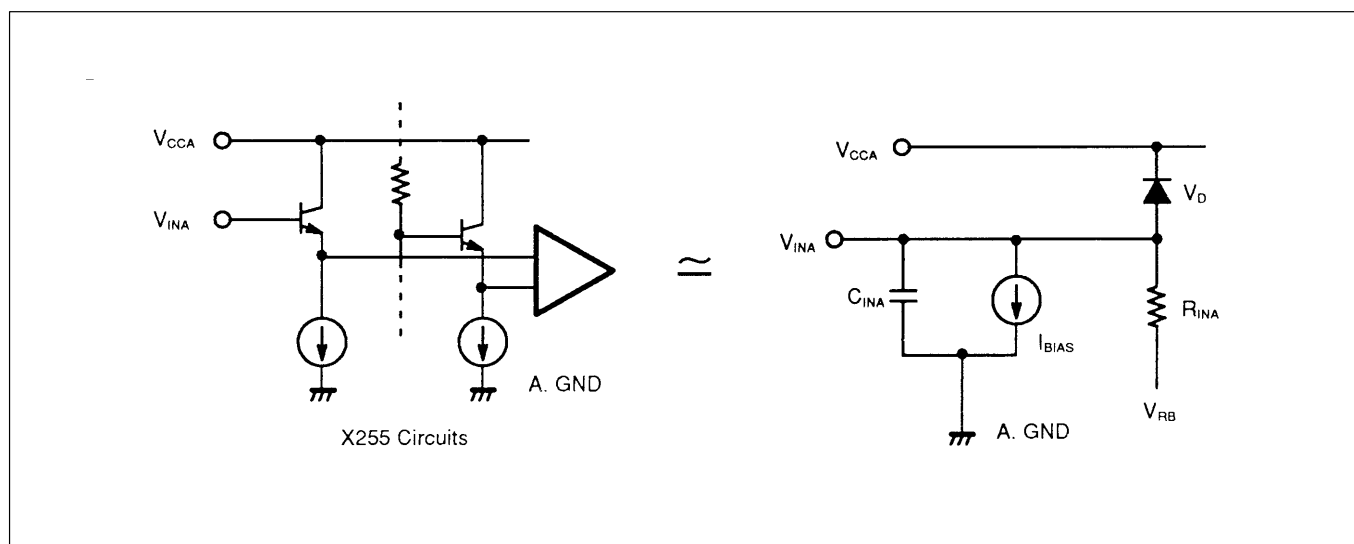


Figure 3. Analog Input Equivalent Circuit

- C_{INA} Nonlinear emitter-follower junction capacitance
- R_{INA} Linear resistance model for input current transition by comparator switching: Infinite value for $V_{INA} < V_{RB}$ or when CLK=High
- V_{RB} Voltage at V_{RB} terminal
- I_{BIAS} Constant input bias current
- V_D Base-collector junction diode of emitter-follower transistor

ELECTRICAL CHARACTERISTICS, continued


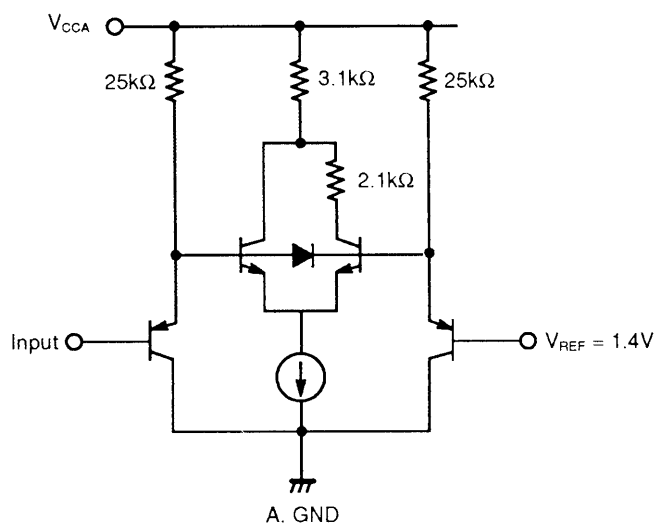


Figure 4. Digital Input Equivalent

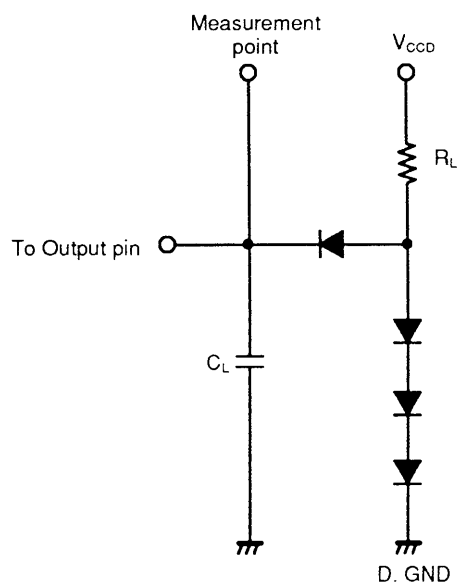

Note $R_L = 2k\Omega$
 $C_L = 15pF$ including scope and jig capacitance
 Diodes: 1N3064 or equivalent

Figure 5. Load Circuit for Output Buffer

OUTPUT CODE

($V_{CC} = 5V$, $V_{RT} \doteq 5.0V$, $V_{RB} = 3.0V$)

Step	Analog Input Voltage	Digital Output Code
0	2.960V	00000000
1	2.968V	00000001
⋮	⋮	⋮
127	3.976V	01111111
128	3.984V	10000000
129	3.992V	10000001
⋮	⋮	⋮
245	4.992V	11111110
255	5.000V	11111111

Note: One step of output voltage (I_{LSB}) is 16 mV when V_{FT} is adjusted at 4.992V, and V_{ZT} at 4.000V by V_{RT} and V_{RB} . The analog input voltages are the center values of each step.

STEP OUTPUT CODE


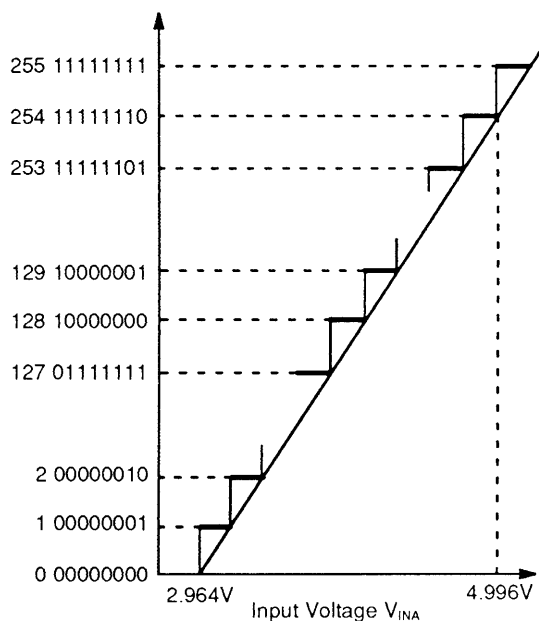


Figure 6. Ideal Conversion Characteristics

STEP OUTPUT CODE

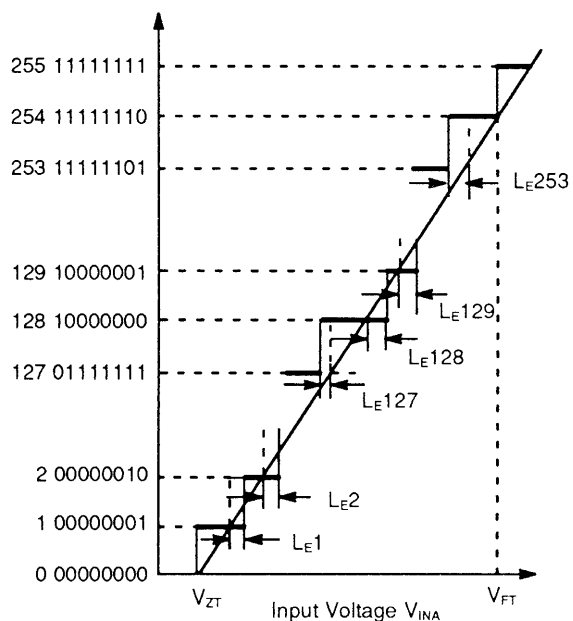


$$\text{Linearity Error} = \frac{|LE_n| \text{ max.}}{|FS|}$$

Figure 7. Practical Conversion Characteristics

PACKAGE DIMENSIONS

22-LEAD PLASTIC IN-LINE PACKAGE (CASE No.: DIP-22P-M04)

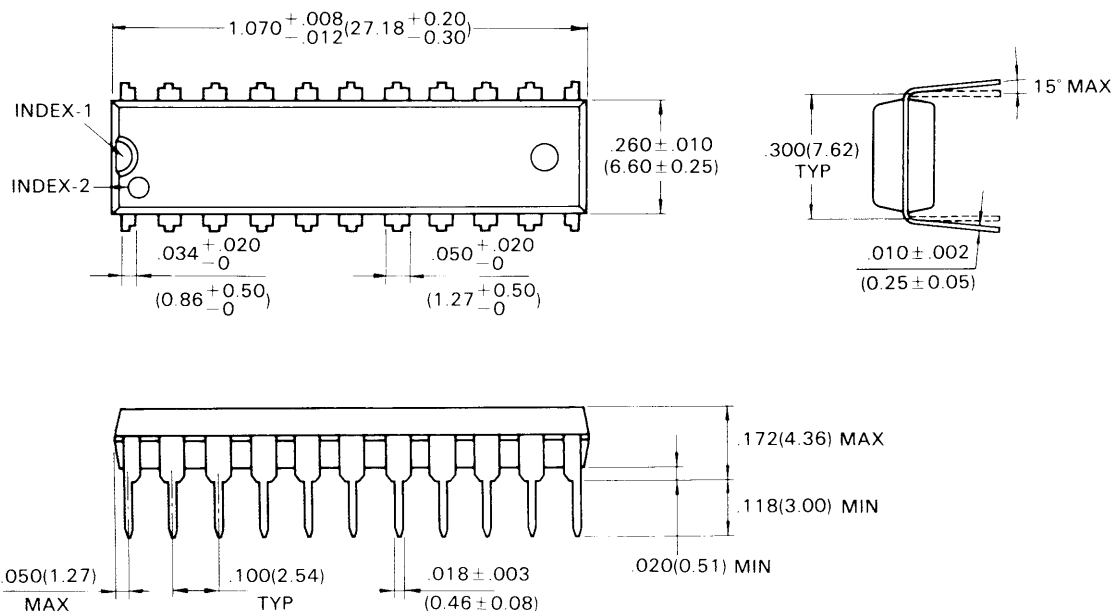

© 1988 FUJITSU LIMITED D22008S-4C

Dimensions in
inches (millimeters)

All Rights Reserved. Circuit diagrams utilizing Fujitsu products are included as a means of illustrating typical semiconductor applications. Complete Information sufficient for construction purposes is not necessarily given. The information contained in this document has been carefully checked and is believed to be reliable. However, Fujitsu assumes no responsibility for inaccuracies.

The Information contained in this document does not convey any license under the copyrights, patent rights or trademarks claimed and owned by Fujitsu. Fujitsu reserves the right to change products or specifications without notice. No part of this publication may be copied or reproduced in any form or by any means, or transferred to any third party without prior written consent of Fujitsu.

FUJITSU LIMITED

For further information please contact:

Japan

FUJITSU LIMITED
Integrated Circuits and Semiconductor Marketing
Furukawa Sogo Bldg., 6-1, Marunouchi 2-chome
Chiyoda-ku, Tokyo 100, Japan
Tel: (03) 3216-3211
Telex: 781-2224361
FAX: (03) 3216-9771

North and South America

FUJITSU MICROELECTRONICS, INC.
Semiconductor Division
3545 North First Street
San Jose, CA 95134-1804 USA
Tel: 408-922-9000
Telex: 910-671-4915
FAX: 408-432-9044

Europe

FUJITSU MIKROELEKTRONiK GmbH
Arabella Centre 9.0G
Lyoner Strasse 44-48
D-6000 Frankfurt 71
F.R. Germany
Tel: (069) 66320
Telex: 411963 FAX: (069) 6632122

Asia

FUJITSU MICROELECTRONICS ASIA PTE LIMITED
51 Bras Basah Road,
Plaza By The Park,
#06-04/07,
Singapore 0718
Tel: 336-1600
Telex: 55573 FAX: 336-1609