

TITLE: KA620 rtVAX CPU MODULE	SHEET 2 OF 3	SIZE CODE B DD	NUMBER KA620-0-DBU	REV. A
----------------------------------	--------------	--------------------------	-----------------------	-----------

LINE ITEM	TOP DOCUMENT	PART NUMBER	MIN REV	DESCRIPTION	QUANTITY PER VARIATION/REVISION	
					AA A1	BA A1
1	B-DD-M7478-0-0	M7478-AA B		RTVAX W/1MB,FP,INCL TIMR OF YEAR C	1	1
2	B-DD-H3263-0-0	H3263-00		KA630 CONFIGURATION CONNECTOR & BA	-	1
3	A-PA-3700847-0-0	37-00847-03 B		PKG DUAL & QUAD MODULE & ACCESSORI	-	1
4		EK-KA620-UG		KA620 RT VAX MODULE USER'S GUIDE	-	1
5		QZZCF-DZ		VAXELN RT LIC FOR KA620 S/U	-	1

1 GEN: NOTE: USE 37-00847-06 PACKAGING FOR BULK SHIPMENT.

REVISION HISTORY		KPL MATRIX FORMAT		SECTION A OF A	DRN: JEFF CORMIER	D I G I T A L		
ENG	ECO NUMBER	REV	SECTION/VARIATION INDEX		DATE: 17-OCT-86	TITLE PARTS LIST		
---	INITIAL	A	[A]	AA,BA	CHK'D: D. HEALY	RTVAX CPU MODULE		
			[B]		DATE: 26-FEB-87			
			[C]		DES.ENG: E. WEAVER	DOCUMENT NUMBER		
			[D]		DATE: 26-FEB-87	SIZE	CODE	NUMBER
			[E]		RESP.ENG.: S. HARGUS	K	PL	KA620-0-DBP
			[F]		DATE: 26-FEB-87	REV		
			[H]		MFG.ENG: R. BOHONOWICZ	RELEASE DATE: 26-FEB-87		
			[J]		DATE: 26-FEB-87	RELEASE STATUS: RELEASED		
			BASIC PART NUMBER:	ASSEMBLY NUMBER:	TOP DOCUMENT NUMBER:	FILE NAME:	EDIT #	
			KA620		B-DD-KA620-0-DBU	MLA0831A.PLS	17	

"THIS DRAWING AND THE SPECIFICATIONS CONTAINED HEREIN ARE CONFIDENTIAL AND PROPRIETARY. THEY ARE THE PROPERTY OF DIGITAL EQUIPMENT CORPORATION AND SHALL NOT BE REPRODUCED OR COPIED OR USED IN WHOLE OR IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION. THIS IS AN UNPUBLISHED WORK PROTECTED UNDER THE FEDERAL COPYRIGHT LAWS."

DRAWING NO.	NO OF SHTS.	PART NO.	DESCRIPTION	REVISIONS															
				A1	B1														
		M7478-AA	KA620	A1	B1														
		M7478-AC	KA620	A1	B1														
		M7478-AP	KA620	A1	B1														
		M7478-AH	KA620	A1	B1														
		M7478-AP	KA620	A1	B1														
D-UA-M7478-0-0	1		KA620 UNIT ASSEMBLY	A	B														
K-PL-M7478-0-DBP	6		KA620 PARTS LIST	A	B														
K-PC-M7478-0-DBJ	1		P.C. DESIGN DATA BASE	A	A														
		5017043-01	ETHEK, CIRCUIT BOARD	A1	A1														
D-DD-5017043-01	1		DRAWING DIRECTORY	A	A														
			M7478 DRAWING DIRECTORY	A	A														
D-CS-M7478-0-1	1		RTVAX SYSTEM	A	A														
D-CS-M7478-0-2	1		KA620-RTVAX ON 022 BUS	A	A														
D-CS-M7478-0-3	1		RTVAX & FPU	A	A														
D-CS-M7478-0-4	1		RTVAX & FPU PINOUTS	A	A														
D-CS-M7478-0-5	1		ADDRESS LATCH/LOCAL MEMORY DECODE	A	A														
D-CS-M7478-0-6	1		MEMORY SUB SYSTEM	A	A														
D-CS-M7478-0-7	1		Q22 BUS INTERFACE GATE ARRAY	A	A														
D-CS-M7478-0-8	1		Q22 BUS INTERFACE GATE ARRAY?	A	A														
D-CS-M7478-0-9	1			A	B														

NOTES:

REVISION HISTORY		REV.	
DATE	ECO NO.		
6/86	INIT	A	B
1/87	ML001		

THIS DRAWING AND THE SPECIFICATIONS CONTAINED HEREIN ARE CONFIDENTIAL AND PROPRIETARY. THEY ARE THE PROPERTY OF DIGITAL EQUIPMENT CORPORATION AND SHALL NOT BE REPRODUCED OR COPIED OR USED IN WHOLE OR IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION. THIS IS AN UNPUBLISHED WORK PROTECTED UNDER THE FEDERAL COPYRIGHT LAWS.



1986

DRN. D. DROZD	DATE 6/13/86	TITLE KA620	
CHK'D J. CUNNINGHAM	DATE 6/13/86	DOCUMENT NUMBER	
DES. ENG. E. WEAVER	DATE 6/13/86	SIZE B	CODE DD
RESP. ENG. S. HARGUS	DATE 6/13/86	NUMBER M7478-0-0	REV B
MFG. ENG. K. Ryan	DATE 6/13/86	SHEET 1 OF 5	

DRAWING NO.	NO OF SHTS.	PART NO.	DESCRIPTION	REVISIONS															
				A	A														
D-CS-M7478-0-14	1		VECTOR HACK	A	A														
D-CS-M7478-0-15	1		INVERTING MUX LOGIC	A	A														
D-CS-M7478-0-16	1		4 to 1 MUX	A	A														
D-CS-M7478-0-17	1		Q-BUS SUPPORT LOGIC	A	A														
D-CS-M7478-0-18	1		BLK MD CTR LOGIC	A	A														
D-CS-M7478-0-19	1		TOGGLE FLOP	A	A														
D-CS-M7478-0-20	1		Q-BUS SUPPORT LOGIC	A	A														
D-CS-M7478-0-21	1		Q-BUS SUPPORT LOGIC	A	A														
D-CS-M7478-0-22	1		Q-BUS SUPPORT LOGIC	A	A														
D-CS-M7478-0-23	1		Q-BUS SUPPORT LOGIC	A	A														
D-CS-M7478-0-24	1		POWER BUFFER MACRO	A	A														
D-CS-M7478-0-25	1		BIDIRECT BUFFER	A	A														
D-CS-M7478-0-26	1		MUX LOGIC	A	A														
D-CS-M7478-0-27	1		TRANSLATION MAP GROUP	A	A														
D-CS-M7478-0-28	1		KA620 Q-BUS INTERFACE	A	A														
D-CS-M7478-0-29	1		RTVAX INTERFACE GATE ARRAY	A	A														
D-CS-M7478-0-30	1		379 PAD ASSIGNMENT TOP VIEW 3320 IN 144 PIN GRIP ARRAY	A	A														
D-CS-M7478-0-31	1		RTVAX INTERFACE GATE ARRAY DATA PATH	A	A														
D-CS-M7478-0-32	1		UVDAL I/O BUFFERS, ADDR LATCHERS	A	A														

NOTES:

REVISION HISTORY	DATE	ECO NO.	REV.
	6/86	INIT	A
	1/87	MLOO1	B

THIS DRAWING AND THE SPECIFICATIONS CONTAINED HEREIN ARE CONFIDENTIAL AND PROPRIETARY. THEY ARE THE PROPERTY OF DIGITAL EQUIPMENT CORPORATION AND SHALL NOT BE REPRODUCED OR COPIED OR USED IN WHOLE OR IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION. THIS IS AN UNPUBLISHED WORK PROTECTED UNDER THE FEDERAL COPYRIGHT LAWS.



1986

DRN. D. DROZD	DATE 6/16/86	TITLE KA620
CHK'D J. CUNNINGHAM	DATE 6/16/86	
DES. ENG. E. HEAVER	DATE 6/16/86	DOCUMENT NUMBER
RESP. ENG. S. HARGUS	DATE 6/16/86	SIZE B CODE DD NUMBER M7478-0-0 REV B
MFG. ENG. K. RYAN	DATE 6/16/86	SHEET 2 OF 5

DRAWING NO.	NO. OF SHTS.	PART NO.	DESCRIPTION	REVISIONS															
				A	A														
D-CS-M7478-0-33	1		ADDRESS DECODER	A	A														
D-CS-M7478-0-34	1		EXCEPTIONS AND INTERRUPTS	A	A														
D-CS-M7478-0-35	1		RTVAX INPUTS AND I/O PINS	A	A														
D-CS-M7478-0-36	1		BOOT/DIAG REG., MEM ERR ADDR REG.	A	A														
D-CS-M7478-0-37	1		EPR BUS, X DAL BUS	A	A														
D-CS-M7478-0-38	1		INTERNAL DATA BUSES	A	A														
D-CS-M7478-0-39	1		MISC. CONTROL STROBES	A	A														
D-CS-M7478-0-40	1		RESET COUNTER, POWER UP/DOWN CNTRL	A	A														
D-CS-M7478-0-41	1		MEMORY SYSTEM ERROR REGISTER	A	A														
D-CS-M7478-0-42	1		TIME OF YEAR (TOY) CLOCK	A	A														
D-CS-M7478-0-43	1		CONSOLE SERIAL LINE INTERFACE	A	A														
D-CS-M7478-0-44	1		LEDS AND CONFIGURATION CONNECTOR	A	A														
D-CS-M7478-0-45	1		DECOUPLING CAPACITATORS	A	A														
D-CS-M7478-0-46	1		KA620 STATE MACHINES	A	A														
D-CS-M7478-0-47	1		RTVAX CYCCLE CONTROLLER	A	A														
D-CS-M7478-0-48	1		MEMORY SEQUENCER	A	A														
D-CS-M7478-0-49	1		MEMORY SEQUENCER SUPPORT	A	A														
D-CS-M7478-0-50	1		Q22 BUS STATE MACHINES	A	A														
D-CS-M7478-0-51	1		KA620 MEMORY ARBITAER LISTING	A	A														

NOTES:

REVISION HISTORY	REV.	A	B
	ECO NO.	INIT	MLOO1
DATE	6/86	1/87	

THIS DRAWING AND THE SPECIFICATIONS CONTAINED HEREIN ARE CONFIDENTIAL AND PROPRIETARY. THEY ARE THE PROPERTY OF DIGITAL EQUIPMENT CORPORATION AND SHALL NOT BE REPRODUCED OR COPIED OR USED IN WHOLE OR IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION. THIS IS AN UNPUBLISHED WORK PROTECTED UNDER THE FEDERAL COPYRIGHT LAWS.



1986

DRN. D. DROZD	DATE 6/13/86	TITLE	
CHK'DJ. CUMMINS	DATE 6/16/86	KA620	
DES. ENG. E. WEAVER	DATE 6/13/86	DOCUMENT NUMBER	
RESP. ENG. S. HARGUS	DATE 6/13/86	SIZE B	CODE DD
MFG. ENG. K. RYAN	DATE 6/13/86	NUMBER M7478-0-0	REV B
		SHEET 3 OF 5	



THIS DRAWING AND SPECIFICATIONS HEREBY ARE THE PROPERTY OF BUSHNELL TELEPHONIC COMPANY. IT IS TO BE USED ONLY FOR THE MANUFACTURE OF THE PRODUCT SPECIFIED HEREIN. NO PARTS OF THIS DRAWING OR SPECIFICATIONS ARE TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM. WITHOUT THE WRITTEN PERMISSION OF BUSHNELL TELEPHONIC COMPANY. © 1988

REWORK INSTRUCTION
 PARTS DELETED AS SHOWN (SIDE 1)
 I-1 REMOVE 23-147E6-00 REF E22
 I-2 REMOVE 23-148E6-00 REF E21

PARTS ADDED AS SHOWN (SIDE 1)
 I-3 INSTALL 23-230E6-00 REF E22
 I-4 INSTALL 23-231E6-00 REF E21

92 (QTY. 4)

8.41 REF
 213.70 MM.

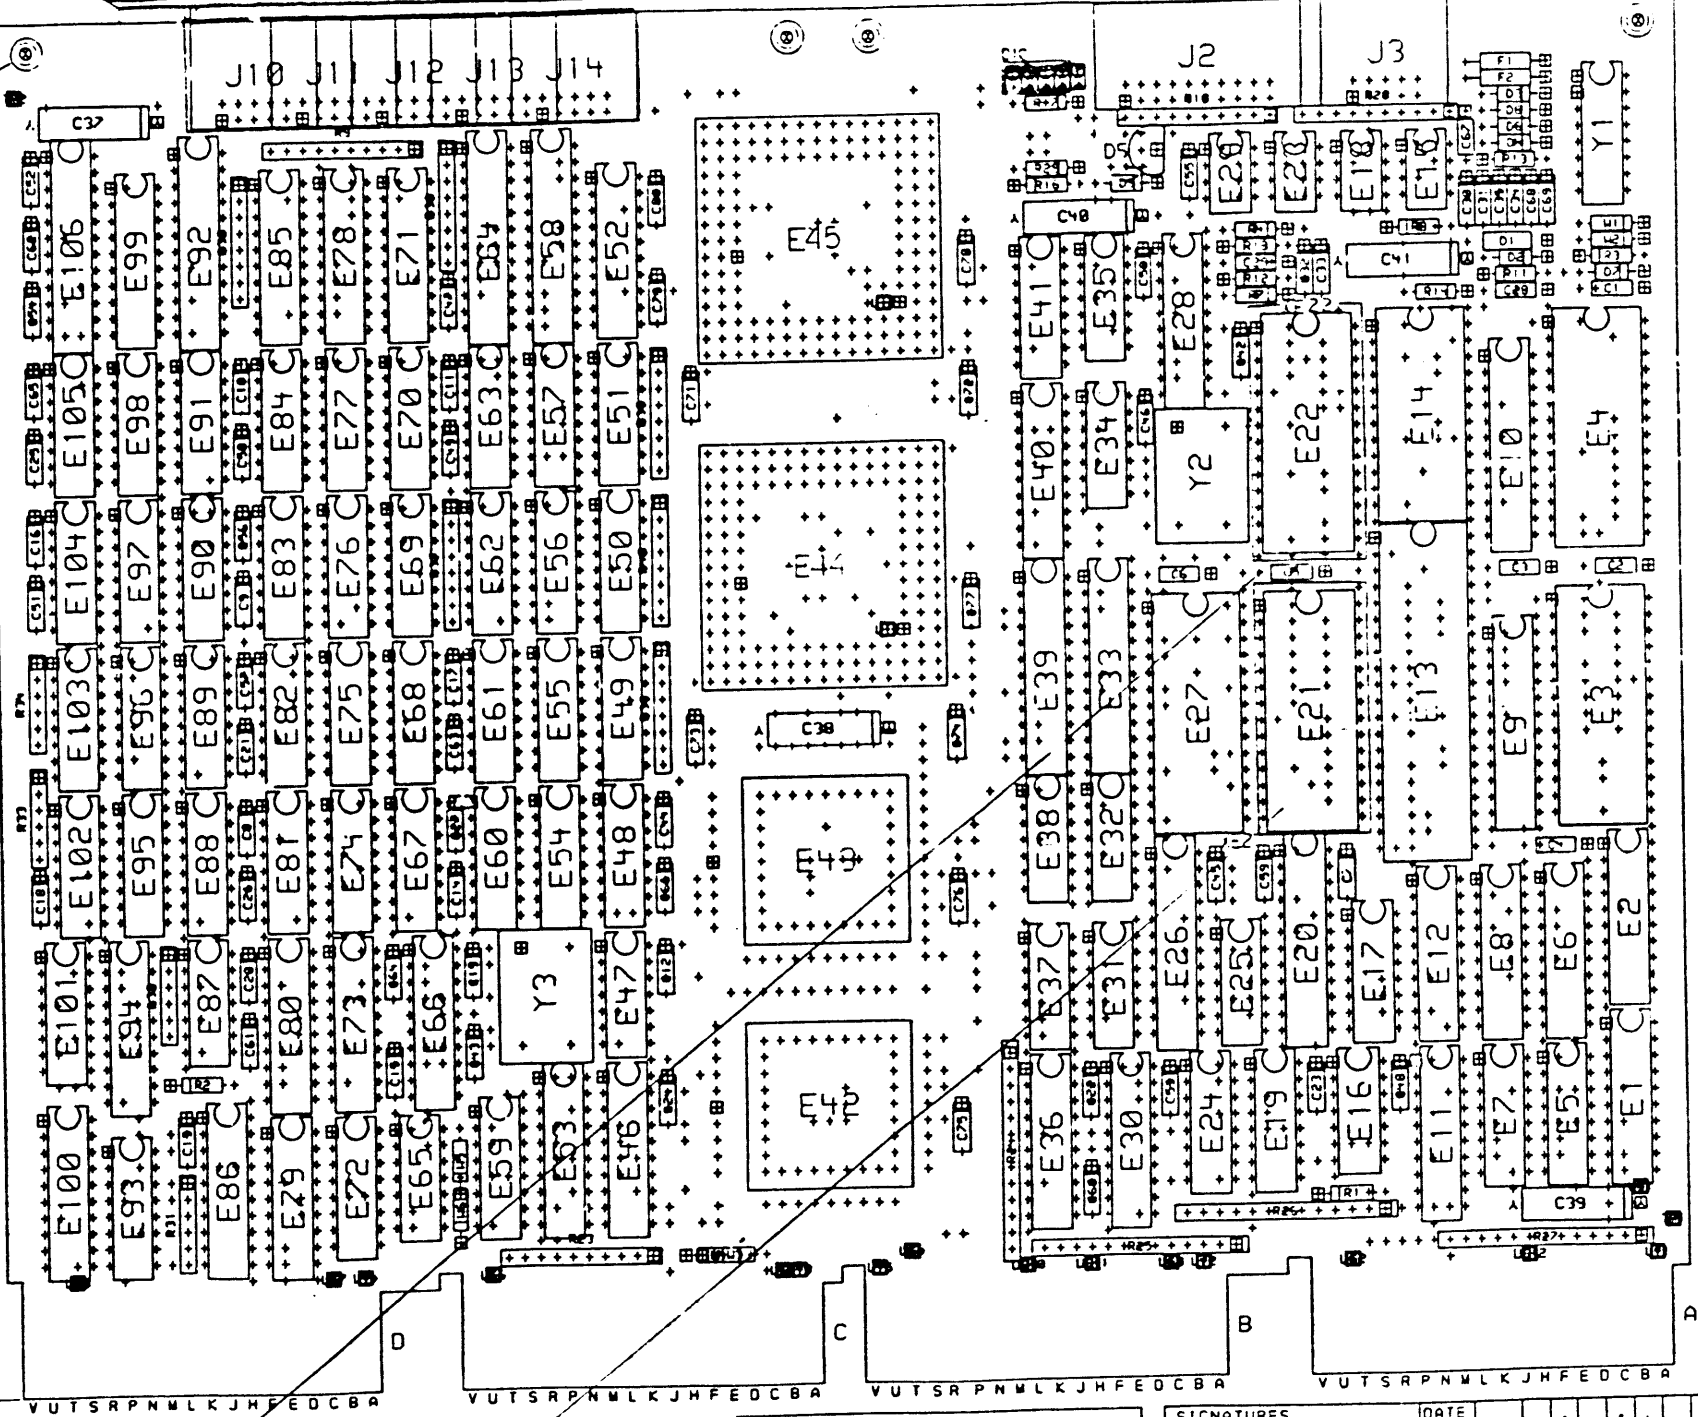

NOTES:

1. W1, W3, W6 NOT INSTALLED

STEP	E	Y AXIS	STEP	TIMES
REPEAT		X AXIS	STEP	TIMES

CHANGE NO	REV	DATE	BY	CHKD
23-230E6-00	B			
23-231E6-00	A			

DESIGNED BY: HARGUS
 DRAWN BY: HARGUS

I-1
 I-3

I-2
 I-4

ETCH REV. A1

SIGNATURES		DATE	TITLE
DRN. <i>Day</i>		6-19-81	
CHK. D. <i>Day</i>		6-19-81	
MECH. ENG. <i>S. Hargus</i>		6-19-81	NUMBER
PROJ. ENG. <i>S. Hargus</i>		6-19-81	
PROD. <i>K. Ryan</i>		8-26-81	REV
SCALE 2:1	SIZE CODE	D U/A	B
SHT. 1 OF 1	NEXT HIGHER ASSY. B-U-M7478-0-0		

1 MS# 20691

DUN 117478-C-0 B

LINE ITEM	TOP DOCUMENT	PART NUMBER	MIN REV	DESCRIPTION	QTY PER VAR/REV				REFERENCE DESIGNATORS
					AA B1	AC B1	AF B1	AH B1	
1	1	D-MD-5017043-0-0		50-17043-01					
2	2			10-10279-01					
3	3			10-12784-00					
4	4			10-13466-05					
5	5			10-13466-07					
6	6			10-14265-02					
7	7			10-17472-00					
8	8			10-20446-05					
9	9			11-00114-00					
10	10			11-05275-00					
11	11			11-09977-00					
12	12			11-14117-00					
13	13			11-14136-02					
14	14			11-20964-01					
15	15			12-10929-02					
16	16			12-13113-03					
17	17			12-13506-04					
18	18			12-13506-10					
19	19			12-13506-13					
20	20			12-15006-07					
21	21			13-00202-00					
22	22			13-00365-00					
23	23			13-00447-00					
24	24			13-00479-00					
25	25			13-01808-00					
26	26			13-02388-00					
27	27			13-02466-00					
28	28			13-04837-00					
29	29			13-14637-00					
30	30			13-16334-02					
31	31			13-17404-00					
32	32			13-17558-01					

REVISION HISTORY		KPL MODULE FORMAT		SECTION A OF B		DRN: JIM CUNNINGHAM	
ENG	ECO NUMBER	REV	SECTION/VARIATION INDEX	DATE: 25-JUN-86	DIGITAL		
---	INITIAL	A	[A] AA,AC,AF,AH [M]	CHK'D: DAVE DROZD	TITLE PARTS LIST		
SH	M7478-ML001	B	[B] AP [N]	DATE: 25-JUN-86	KA620		
			[C] [P]	DES.ENG: E. WEAVER	REAL TIME VAX		
			[D] [Q]	DATE: 25-JUN-86	DOCUMENT NUMBER		
			[E] [R]	RESP.ENG.: S. HARGUS	SIZE	CODE	NUMBER
			[F] [S]	DATE: 25-JUN-86	K	PL	M7478-0-DBP
			[H] [T]	MFG.ENG: K. RYAN	RELEASE DATE: 21-JAN-87		
			[J] [V]	DATE: 25-JUN-86	RELEASE STATUS: RELEASED		
			[K] [W]				
			[L] [Y]				
BASIC PART NUMBER:		ASSEMBLY NUMBER:		TOP DOCUMENT NUMBER:		FILE NAME:	
M7478		D-UA-M7478-0-0		B-DD-M7478-0-0		GH988B.PLS	
						EDIT #	
						2	

"THIS DRAWING AND THE SPECIFICATIONS CONTAINED HEREIN ARE CONFIDENTIAL AND PROPRIETARY. THEY ARE THE PROPERTY OF DIGITAL EQUIPMENT CORPORATION AND SHALL NOT BE REPRODUCED OR COPIED OR USED IN WHOLE OR IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION. THIS IS AN UNPUBLISHED WORK PROTECTED UNDER THE FEDERAL COPYRIGHT LAWS."

PARTS LIST

LINE	ITEM	TOP DOCUMENT	PART NUMBER	MIN REV	DESCRIPTION	QTY PER VAR/REV				REFERENCE DESIGNATORS
						AA B1	AC B1	AF B1	AH B1	
33	33		13-18110-00		R. NET 330.0 -11 680.0 -11 5.0	4	4	4	4	R24-R27
34	34		13-19610-01		750.0 K .25 W 0.1 % RN55E-B 2	1	1	1	1	R17
35	35		13-19645-01		487.0 K .25 W 0.1 % RN55E-B 2	1	1	1	1	R18
36	36		13-21144-01		R. NET 220.0 - 5 2.0	1	1	1	1	R28
37	37		13-21218-01		R. NET 39.0 - 4 +/-1	4	4	4	4	R35-R38
38	38		13-21380-01		R. NET 470.0 - 9 2.0	1	1	1	1	R9
39	39		18-11660-62		OSCILLATOR,XTAL 614.4 KHZ	1	1	1	1	Y2
40	40		18-14057-00		OSCILLATOR, XTAL 40.000 MHZ	1	1	1	1	Y3
41	41		18-18800-00		OSCILLATOR,XTAL 32.768KHZ	1	1	1	1	Y1
42	42		19-11469-B0		8640 BURNED-IN RECEIVER,B	1	1	1	1	E16
43	43		19-12803-B0		LS04 BURNED-IN INVERTER G	1	1	1	1	E25
44	44		19-13471-B0		LS367 BURNED-IN DRIVER,BUS	1	1	1	1	E41
45	45		19-14140-01	LM	211P COMPARATOR,VOLTAGE	1	1	1	1	E29
46	46		19-14987-00		8641-2 TRANSCEIVER,UNIBUS,	4	4	4	4	E5,E7,E19,E24
47	47		19-15193-B0		LS244 BURNED-IN DRIVER,LIN	1	1	1	1	E28
48	48		19-15219-B0		LS373 BURNED-IN FF-0 OCTAL	1	1	1	1	E1
49	49		19-15415-B0		9636 BURNED-IN DRIVER,DUA	1	1	1	1	E23
50	50		19-16028-B1		9643 BURNED-IN DRIVER,TTL	1	1	1	1	E15
51	51		19-18868-B0		LS26 NAND GATE,2-IN,HIGH	1	1	1	1	E35
52	52		19-19015-00	DC	021 BUS TRANSCEIVER,20PI	3	3	3	3	E11,E30,E36
53	53		19-19542-B1		9639 RECEIVER,LINE,DUAL,P	1	1	1	1	E18
54	54		19-19684-01	LM	385B2 PREC VOLT REF. 1.23	1	1	1	1	D5
55	55		19-20441-B1		74F245 TRANSCEIVER,BI-DIREC	4	4	4	4	E52,E71,E85,E99
56	56		19-20442-B1		74F374 FF-D,OCTAL,TRI-STATE	2	2	2	2	E8,E12
57	57		19-20853-B1		LS646 BUS TRANSCEIVER/REGI	2	2	2	2	E9,E10
58	58		19-21008-B1		74F240 BUFFER/LINE DRIVER,O	2	2	2	2	E80,E94
59	59		19-21010-B1		74F373 OCTAL TRANSPARENT LA	5	5	5	5	E2,E6,E46,E53,E73
60	60		19-21305-B1		74F00 NAND GATE,QUAD,2-IN,	1	1	1	1	E47
61	61		19-21306-B1		74F02 NOR GATE,QUAD,2-IN,B	1	1	1	1	E38
62	62		19-21307-B1		74F04 HEX INVERTER,BURNED	2	2	2	2	E32,E87
63	63		19-21312-B1		74F32 OR GATE,QUAD,2-IN,BU	2	2	2	2	E37,E65
64	64		19-21314-B1		74F74 FF-D,DUAL,BURNED-IN	2	2	2	2	E31,E34
65	65		19-21321-B1		74F158 MUX,QUAD,2-IN,BURNED	3	3	3	3	E72,E93,E101
66	66		19-21323-B1		74F174 FF-D,HEX,BURNED-IN	2	2	2	2	E17,E59
67	67		19-21417-B1		74F521 COMPARATOR,IDENTITY,	1	1	1	1	E66
68	68		19-22871-01		29853 TRANSCEIVER,PARITY B	4	4	4	4	E58,E64,E92,E106
69	69		19-23679-B1		74F537 DECODER/DEMUX,1-OF-1	1	1	1	1	E100
70	70		21-17312-00		UART DL-11 SOFTWARE	1	1	1	1	E13
71	71		21-18795-00		146818 CLOCK/CALENDAR/RAM	1	1	1	1	E14
72	72		21-21384-02		RAM 8KX8,STATIC 150	2	2	2	2	E3,E4
73	73		21-21413-02		41256 RAM 256KX1,DYNAMIC M	-	-	-	-	36 E48-E51,E54-E57,E60-E63, CONT E67-E70,E74-E77,E81-E84, CONT E88-E91,E95-E98,E102-E105
74	74		21-21414-02		50256 RAM 256KX1 DYNAMIC M	-	-	-	-	36 E48-E51,E54-E57,E60-E63, CONT E67-E70,E74-E77,E81-E84, CONT E88-E91,E95-E98,E102-E105
75	75		21-21415-02		81256-15 RAM 256KX1,DYNAMIC 1	-	-	-	-	36 E48-E51,E54-E57,E60-E63, CONT E67-E70,E74-E77,E81-E84, CONT E88-E91,E95-E98,E102-E105
76	76		21-22422-02		256KX1 MOS RAM 150NS 1	-	-	-	-	36 E48-E51,E54-E57,E60-E63, CONT E67-E70,E74-E77,E81-E84, CONT E88-E91,E95-E98,E102-E105

D	I	G	I	T	A	L	TITLE	SECTION A OF B	SIZE	CODE	DOCUMENT NUMBER	REV
							KA620 REAL TIME VAX		K	PL	M7478-0-DBP	B

LINE	ITEM	TOP DOCUMENT	PART NUMBER	MIN REV	DESCRIPTION	QTY PER VAR/REV				REFERENCE DESIGNATORS
						AA B1	AC B1	AF B1	AH B1	
77	77		21-22797-01	DC	337 MICROVAX FLOATING PO	1	1	1	1	E42
78	78		21-23389-01		DC380A GATE ARRAY,3200 GATE	1	1	1	1	E45
79	79		21-23413-01		DC379 CMOS GATE ARRAY,144PGA,320	1	1	1	1	E44
80	80		21-26400-01	DC	532 REAL TIME MICROVAX 3	1	1	1	1	E43
81	81		23-10L3 -00	L3-01		1	1	1	1	E33
82	82		23-147E6-00		*** THIS ITEM IS NOT USED ***	-	-	-	-	
83	83		23-148E6-00		*** THIS ITEM IS NOT USED ***	-	-	-	-	
84	84		23-14L3 -00	L3-01		1	1	1	1	E39
85	85		23-169J5-00	J5-03	PAL,LOGIC	1	1	1	1	E40
86	86		23-170J5-00	J5-03	PAL,LOGIC	1	1	1	1	E78
87	87		23-227J5-00	J5-03	PAL,OCTAL AND-	1	1	1	1	E86
88	88		23-31L3 -00	L3-01		1	1	1	1	E26
89	89		23-53L1 -00	L1-01		1	1	1	1	E27
90	90		23-8L3 -00	L3-01	FPLS	1	1	1	1	E20
91	91		23-E42F1-00	F1-05		1	1	1	1	E79
92	92		90-00024-01		EYELET,ROLLED 0.1210DXC.192	4	4	4	4	
93	93		90-09185-00		JUMPER, WIRE, INSULATED, BLACK B	3	3	3	3	W2,W4,W5
94	94		99-07004-06		CARTON,DIE CUT,B,200PSI W/ARTWOR	1	1	1	1	
95	95		99-07025-06		BAG,ANTISTATIC BUBBLE	1	1	1	1	
96	96		99-07092-04		BAG,TRANSLUCENT,ESD PROTECTIVE	1	1	1	1	
97	97		23-230E6-00		E6-01,E6-02 E6-03 ROM	1	1	1	1	E22
98	98		23-231E6-00		E6-01,E6-02 E6-03 ROM	1	1	1	1	E21

- 1 GEN: 1A:M7478-AA IS THE PRI. GENERIC VAR OF THE KA620 CPU W/EITHER OF THE FOLLOWING APPROVED RAM VENDORS.
- 3 GEN: 2B:MOD'S MUST BE STAMPED LABELED ACCORDINGLY,DEPENDING ON RAM MANUFACTURE.
- 4 GEN: M7478-AC IS THE MODULE USING FUJITSU 256K RAMS.
- 5 GEN: M7478-AF IS THE MODULE USING HITACHI 256K RAMS.
- 6 GEN: M7478-AH IS THE MODULE USING NEC 256K RAMS.
- 11 GEN: M7478-AP IS THE MODULE USING MITSUBISHI 256K RAMS.

D	I	G	I	T	A	L	TITLE	SECTION A OF B	SIZE	CODE	DOCUMENT NUMBER	REV
							KA620 REAL TIME VAX		K	PL	M7478-0-DBP	B

LINE	ITEM	TOP DOCUMENT	PART NUMBER	MIN REV	DESCRIPTION	QTY	PER VAR/REV	REFERENCE DESIGNATORS
1	1	D-MD-5017043-0-0	50-17043-01		CIRCUIT DRILL AND ETCH	1		
2	2		10-10279-01		0.47 MFD 25V +/-20% Z5U C	6		C30-C35
3	3		10-12784-00		0.047MFD 50V +80/-20% Z5U C	7		C1-C6,C28
4	4		10-13466-05		56 PFD 50V +/- 5% NPO C	1		C67
5	5		10-13466-07		220 PFD 50V +/- 5% NPO C	1		C29
6	6		10-14265-02		0.33 MFD 50V +80/-20% Z5U C	58		C7-C27,C42-C66,C68,C69,C71-C80
7	7		10-17472-00		10 MF 35V +75/-10% ALU	3		C39-C41
8	8		10-20446-05		22 MFD 16V +50/-20% ALU	2		C37,C38
9	9		11-00114-00		PIV= 25 IO=135 MA	1		D9
10	10		11-05275-00		PIV= 60 IO=300 MA -15NS	3		D2-D4
11	11		11-09977-00		VZ= 4.3 5% 1N749A	1		D1
12	12		11-14117-00		PIV= 40 IO= 75 A -4NS 1N4152	3		D6-D8
13	13		11-14136-02		LED 6.7MA 5V .2MCD GREEN	1		D14
14	14		11-20964-01		LED ASSY 4 RED 5V 8MA	1		D10
15	15		12-10929-02		FUSE PICO 1.0 A 125V AXIAL LEA	2		F1,F2
16	16		12-13113-03		HANDLE,MODULE	1		
17	17		12-13506-04		PCB HEADER 09PIN(2X05),100CC 90D	1		J3
18	18		12-13506-10		PCB HEADER 20PIN(2X10),100CC 90D	1		J2
19	19		12-13506-13		PCB HEADER 50PIN(2X25),100CC 90D	1		J1
20	20		12-15006-07		SKT,IC 28PIN DIP TIN SOLD	2		XE21,XE22
21	21		13-00202-00		47.0 .25 W 5.0 % CF	3		R1,R2,R29
22	22		13-00365-00		1.0 K .25 W 5.0 % CF	1		R3
23	23		13-00447-00		4.70 K .25 W 5.0 % CF	1		R8
24	24		13-00479-00		10.0 K .25 W 5.0 % CF	2		R11,R12
25	25		13-01808-00		22.0 K .25 W 5.0 % CF	1		R4
26	26		13-02388-00		2.0 K .25 W 5.0 % CF	1		R14
27	27		13-02466-00		100.0 K .25 W 5.0 % CF	1		R16
28	28		13-04837-00		24.0 K .25 W 5.0 % CF	1		R7
29	29		13-14637-00		R. NET 22.0 - 3 5.0	4		R31-R34
30	30		13-16334-02		R. NET 10.0K- 9 2.0	2		R10,R23
31	31		13-17404-00		249.0 .25 W 1.0 % RN55D-F10	1		R13
32	32		13-17558-01		R. NET 27.0 - 4 5.0	2		R39,R40

REVISION HISTORY			KPL MODULE FORMAT SECTION B OF B		DRN: JIM CUNNINGHAM	DIGITAL					
ENG	ECO NUMBER	REV	SECTION/VARIATION INDEX		DATE: 25-JUN-86						
---	INITIAL	A	(A)	AA,AC,AF,AH	(M)	CHK'D: DAVE DROZD	TITLE PARTS LIST				
SH	M7478-ML001	B	(B)	AP	(N)	DATE: 25-JUN-86	KA620				
			(C)		(P)	DES.ENG: E. WEAVER	REAL TIME VAX				
			(D)		(Q)	DATE: 25-JUN-86	DOCUMENT NUMBER				
			(E)		(R)	RESP.ENG.: S. HARGUS	SIZE	CODE	NUMBER	REV	
			(F)		(S)	DATE: 25-JUN-86	K	PL	M7478-0-DBP	B	
			(H)		(T)	MFG.ENG: K. RYAN	RELEASE DATE: 21-JAN-87				
			(J)		(V)	DATE: 25-JUN-86	RELEASE STATUS: RELEASED				
			(K)		(W)		BASIC PART NUMBER: M7478				
			(L)		(Y)		ASSEMBLY NUMBER: D-UA-M7478-0-0				
							TOP DOCUMENT NUMBER: B-DD-M7478-0-0				
							FILE NAME: GH988B.PLS				
							EDIT #: 2				

"THIS DRAWING AND THE SPECIFICATIONS CONTAINED HEREIN ARE CONFIDENTIAL AND PROPRIETARY. THEY ARE THE PROPERTY OF DIGITAL EQUIPMENT CORPORATION AND SHALL NOT BE REPRODUCED OR COPIED OR USED IN WHOLE OR IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION. THIS IS AN UNPUBLISHED WORK PROTECTED UNDER THE FEDERAL COPYRIGHT LAWS."


LINE	ITEM	TOP DOCUMENT	PART NUMBER	MIN REV	DESCRIPTION	QTY PER AP B1	VAR/REV	REFERENCE DESIGNATORS
33	33		13-18110-00		R. NET 330.0 -11 680.0 -11 5.0	4		R24-R27
34	34		13-19610-01		750.0 K .25 W 0.1 % RN55E-B 2	1		R17
35	35		13-19645-01		487.0 K .25 W 0.1 % RN55E-B 2	1		R18
36	36		13-21144-01		R. NET 220.0 - 5 2.0	1		R28
37	37		13-21218-01		R. NET 39.0 - 4 +/-1	4		R35-R38
38	38		13-21380-01		R. NET 170.0 - 9 2.0	1		R9
39	39		18-11660-62		OSCILLATOR, XTAL 514.4 KHZ	1		Y2
40	40		18-14057-00		OSCILLATOR, XTAL 40.000 MHZ	1		Y3
41	41		18-18800-00		OSCILLATOR, XTAL 32.768KHZ	1		Y1
42	42		19-11469-B0		8640 BURNED-IN RECEIVER, B	1		E16
43	43		19-12803-B0		LS04 BURNED-IN INVERTER G	1		E25
44	44		19-13471-B0		LS367 BURNED-IN DRIVER, BUS	1		E41
45	45		19-14140-01	LM	211P COMPARATOR, VOLTAGE	1		E29
46	46		19-14987-00		8641-2 TRANSCEIVER, UNIBUS,	4		E5, E7, E19, E24
47	47		19-15193-B0		LS244 BURNED-IN DRIVER, LIN	1		E28
48	48		19-15219-B0		LS373 BURNED-IN FF-OCTAL	1		E1
49	49		19-15415-B0		9636 BURNED-IN DRIVER, DUA	1		E23
50	50		19-16028-B1		9643 BURNED-IN DRIVER, TTL	1		E15
51	51		19-18868-B0		LS26 NAND GATE, 2-IN, F .H	1		E35
52	52		19-19015-00	DC	021 BUS TRANSCEIVER, 20PI	3		E11, E30, E36
53	53		19-19542-B1		9639 RECEIVER, LINE, DUAL, P	1		E18
54	54		19-19684-01	LM	385B2 PREC VOLT REF. 1.23	1		D5
55	55		19-20441-B1		74F245 TRANSCEIVER, BI-DIREC	4		E52, E71, E85, E99
56	56		19-20442-B1		74F374 FF-D, OCTAL, TRI-STATE	2		E8, E12
57	57		19-20853-B1		LS646 BUS TRANSCEIVER/REGI	2		E9, E10
58	58		19-21008-B1		74F240 BUFFER/LINE DRIVER, O	2		E80, E94
59	59		19-21010-B1		74F373 OCTAL TRANSPARENT LA	5		E2, E6, E46, E53, E73
60	60		19-21305-B1		74F00 NAND GATE, QUAD, 2-IN,	1		E47
61	61		19-21306-B1		74F02 NOR GATE, QUAD, 2-IN, B	1		E38
62	62		19-21307-B1		74F04 HEX INVERTER, BURNED	2		E32, E87
63	63		19-21312-B1		74F32 OR GATE, QUAD, 2-IN, BU	2		E37, E65
64	64		19-21314-B1		74F74 FF-D, DUAL, BURNED-IN	2		E31, E34
65	65		19-21321-B1		74F158 MUX, QUAD, 2-IN, BURNED	3		E72, E93, E101
66	66		19-21323-B1		74F174 FF-D, HEX, BURNED-IN	2		E17, E59
67	67		19-21417-B1		74F521 COMPARATOR, IDENTITY,	1		E66
68	68		19-22871-01		29853 TRANSCEIVER, PARITY B	4		E58, E64, E92, E106
69	69		19-23679-B1		74F537 DECODER/DEMUX, 1-OF-1	1		E100
70	70		21-17312-00		UART DL-11 SOFTWARE	1		E13
71	71		21-18795-00		146818 CLOCK/CALENDAR/RAM	1		E14
72	72		21-21384-02		RAM 8KX8, STATIC 150	2		E3, E4
73	73		21-21413-02		41256 RAM 256KX1, DYNAMIC M	-		
74	74		21-21414-02		50256 RAM 256KX1 DYNAMIC M	-		
75	75		21-21415-02		81256-15 RAM 256KX1, DYNAMIC 1	-		
76	76		21-22422-02		256KX1 MOS RAM 150NS 1	36		E48-E51, E54-E57, E60-E63, CONT E67-E70, E74-E77, E81-E84, CONT E88-E91, E95-E98, E102-E105
77	77		21-22797-01	DC	337 MICROVAX FLOATING PO	1		E42
78	78		21-23389-01		DC380A GATE ARRAY, 3200 GATE	1		E45
79	79		21-23413-01		DC379 CMOS GATE ARRAY, 144PGA, 320	1		E44
80	80		21-26400-01	DC	532 REAL TIME MICROVAX 3	1		E43

D	I	G	I	T	A	L	TITLE	SECTION B	OF B	SIZE	CODE	DOCUMENT NUMBER	REV
							KA620 REAL TIME VAX			K	PL	M7478-0-DBP	B

LINE	ITEM	TOP DOCUMENT	PART NUMBER	MIN REV	DESCRIPTION	QTY PER VAR/REV	REFERENCE DESIGNATORS
						AP B1	
81	81		23-10L3 -00	L3-01		1	E33
82	82		23-147E6-00		*** THIS ITEM IS NOT USED ***	-	
83	83		23-148E6-00		*** THIS ITEM IS NOT USED ***	-	
84	84		23-14L3 -00	L3-01		1	E39
85	85		23-169J5-00	J5-03	PAL,LOGIC	1	E40
86	86		23-170J5-00	J5-03	PAL,LOGIC	1	E78
87	87		23-227J5-00	J5-03	PAL,OCTAL AND-	1	E86
88	88		23-31L3 -00	L3-01		1	E26
89	89		23-53L1 -00	L1-01		1	E27
90	90		23-8L3 -00	L3-01	FPLS	1	E20
91	91		23-E42F1-00	F1-05		1	E79
92	92		90-00024-01		EYELET,ROLLED 0.12100X0.192	4	
93	93		90-09185-00		JUMPER, WIRE, INSULATED, BLACK E	3	W2,W4,W5
94	94		99-07C04-06		CARTON,DIE CUT,B,200PSI W/ARTWOR	1	
95	95		99-07025-06		BAG,ANTISTATIC BUEBLE	1	
96	96		99-07092-04		BAG,TRANSLUCENT,ESD PROTECTIVE	1	
97	97		23-230E6-00		E6-01,E6-02 E6-03 ROM	1	E22
98	98		23-231E6-00		E6-01,E6-02 E6-03 ROM	1	E21

- 1 GEN: 1A:M7478-AA IS THE PRI. GENERIC VAR OF THE KA620 CPU W/EITHER OF THE FOLLOWING APPROVED RAM VENDORS.
- 3 GEN: 2B:MOD'S MUST BE STAMPED LABELED ACCORDINGLY,DEPENDING ON RAM MANUFACTURE.
- 4 GEN: M7478-AC IS THE MODULE USING FUJITSU 256K RAMS.
- 5 GEN: M7478-AF IS THE MODULE USING HITACHI 256K RAMS.
- 6 GEN: M7478-AH IS THE MODULE USING NEC 256K RAMS.
- 11 GEN: M7478-AP IS THE MODULE USING MITSUBISHI 256K RAMS.

D	I	G	I	T	A	L	TITLE	SECTION B OF B	SIZE	CODE	DOCUMENT NUMBER	REV
							KA620 REAL TIME VAX		k	PL	M7478-0-DBP	B

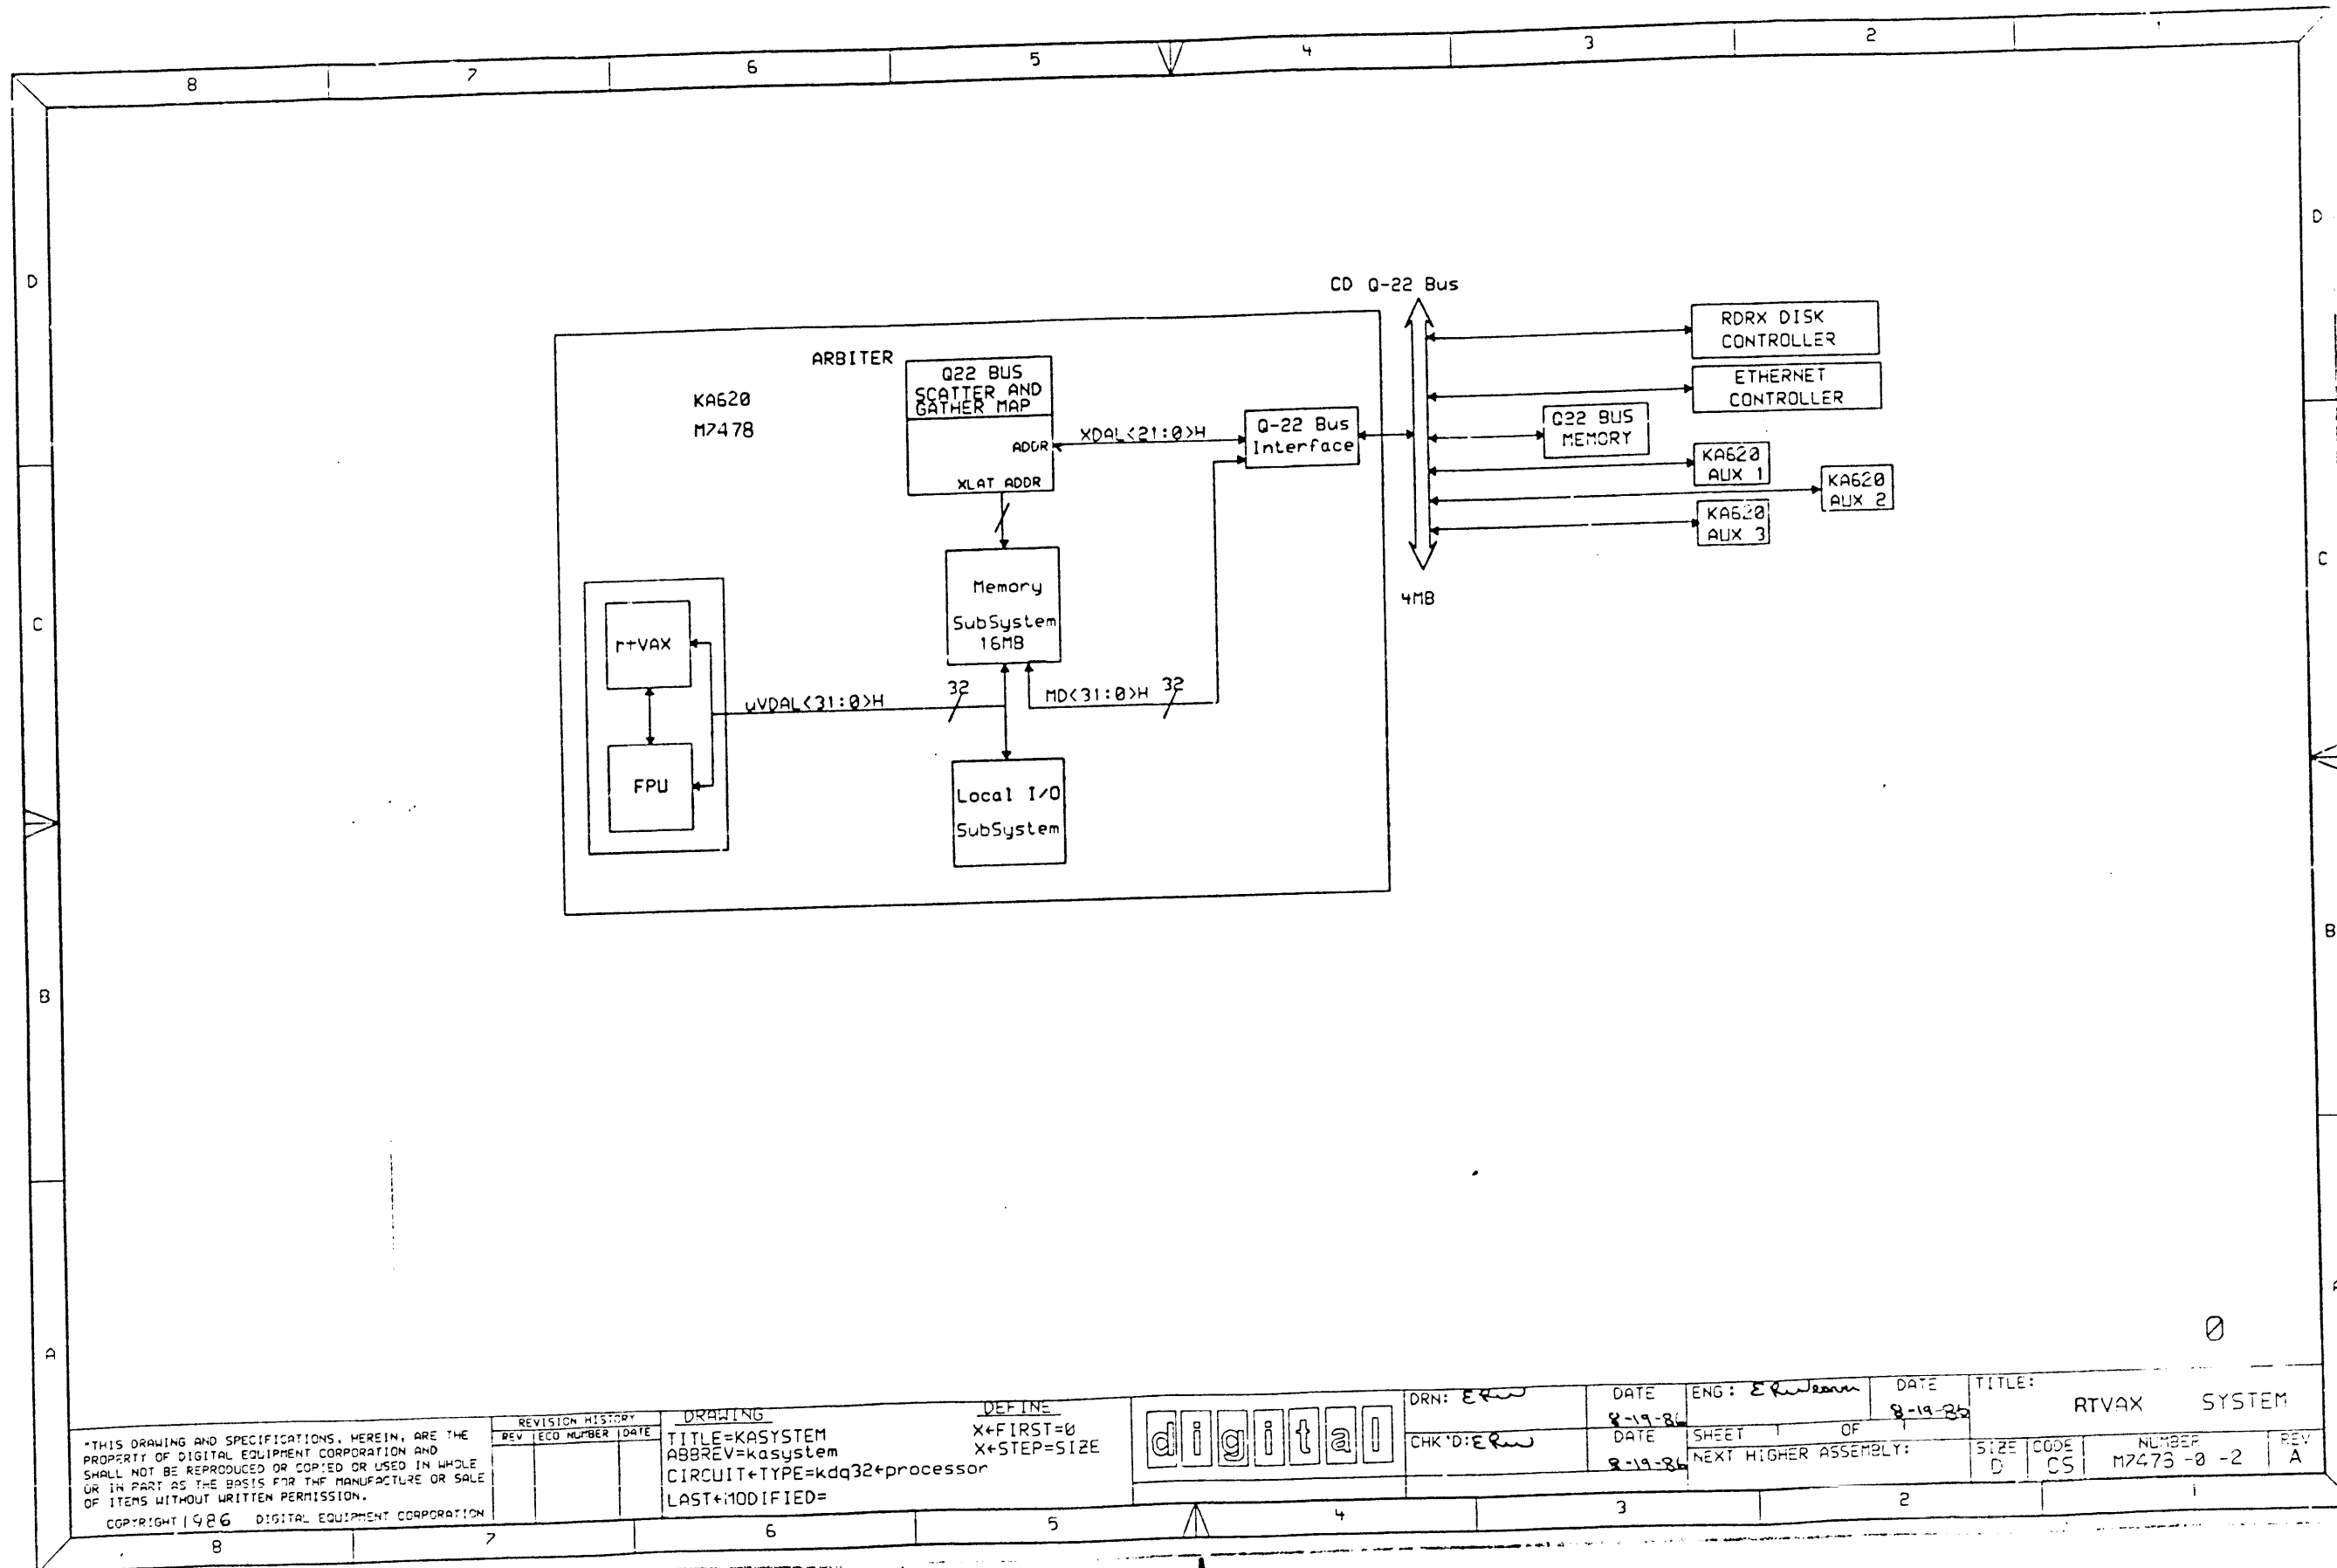

*THIS DRAWING AND SPECIFICATIONS, HEREIN, ARE THE PROPERTY OF DIGITAL EQUIPMENT CORPORATION AND SHALL NOT BE REPRODUCED OR COPIED OR USED, IN WHOLE OR IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION.
 COPYRIGHT 1986 DIGITAL EQUIPMENT CORPORATION

REVISION HISTORY		
REV	ECO NUMBER	DATE

DRAWING
 TITLE=KASystem
 ABBREV=kasystem
 CIRCUIT+TYPE=kdq32+processor
 LAST+MODIFIED=

DEFINE
 X+FIRST=0
 X+STEP=SIZE




DRN: ERW
 CHK'D: ERW

DATE 8-19-86
 DATE 8-19-86

ENG: ERW
 SHEET 1 OF 1
 NEXT HIGHER ASSEMBLY:

DATE 8-19-86
 TITLE: RTVAX SYSTEM
 SIZE D CODE CS NUMBER M7473-0-2 REV A

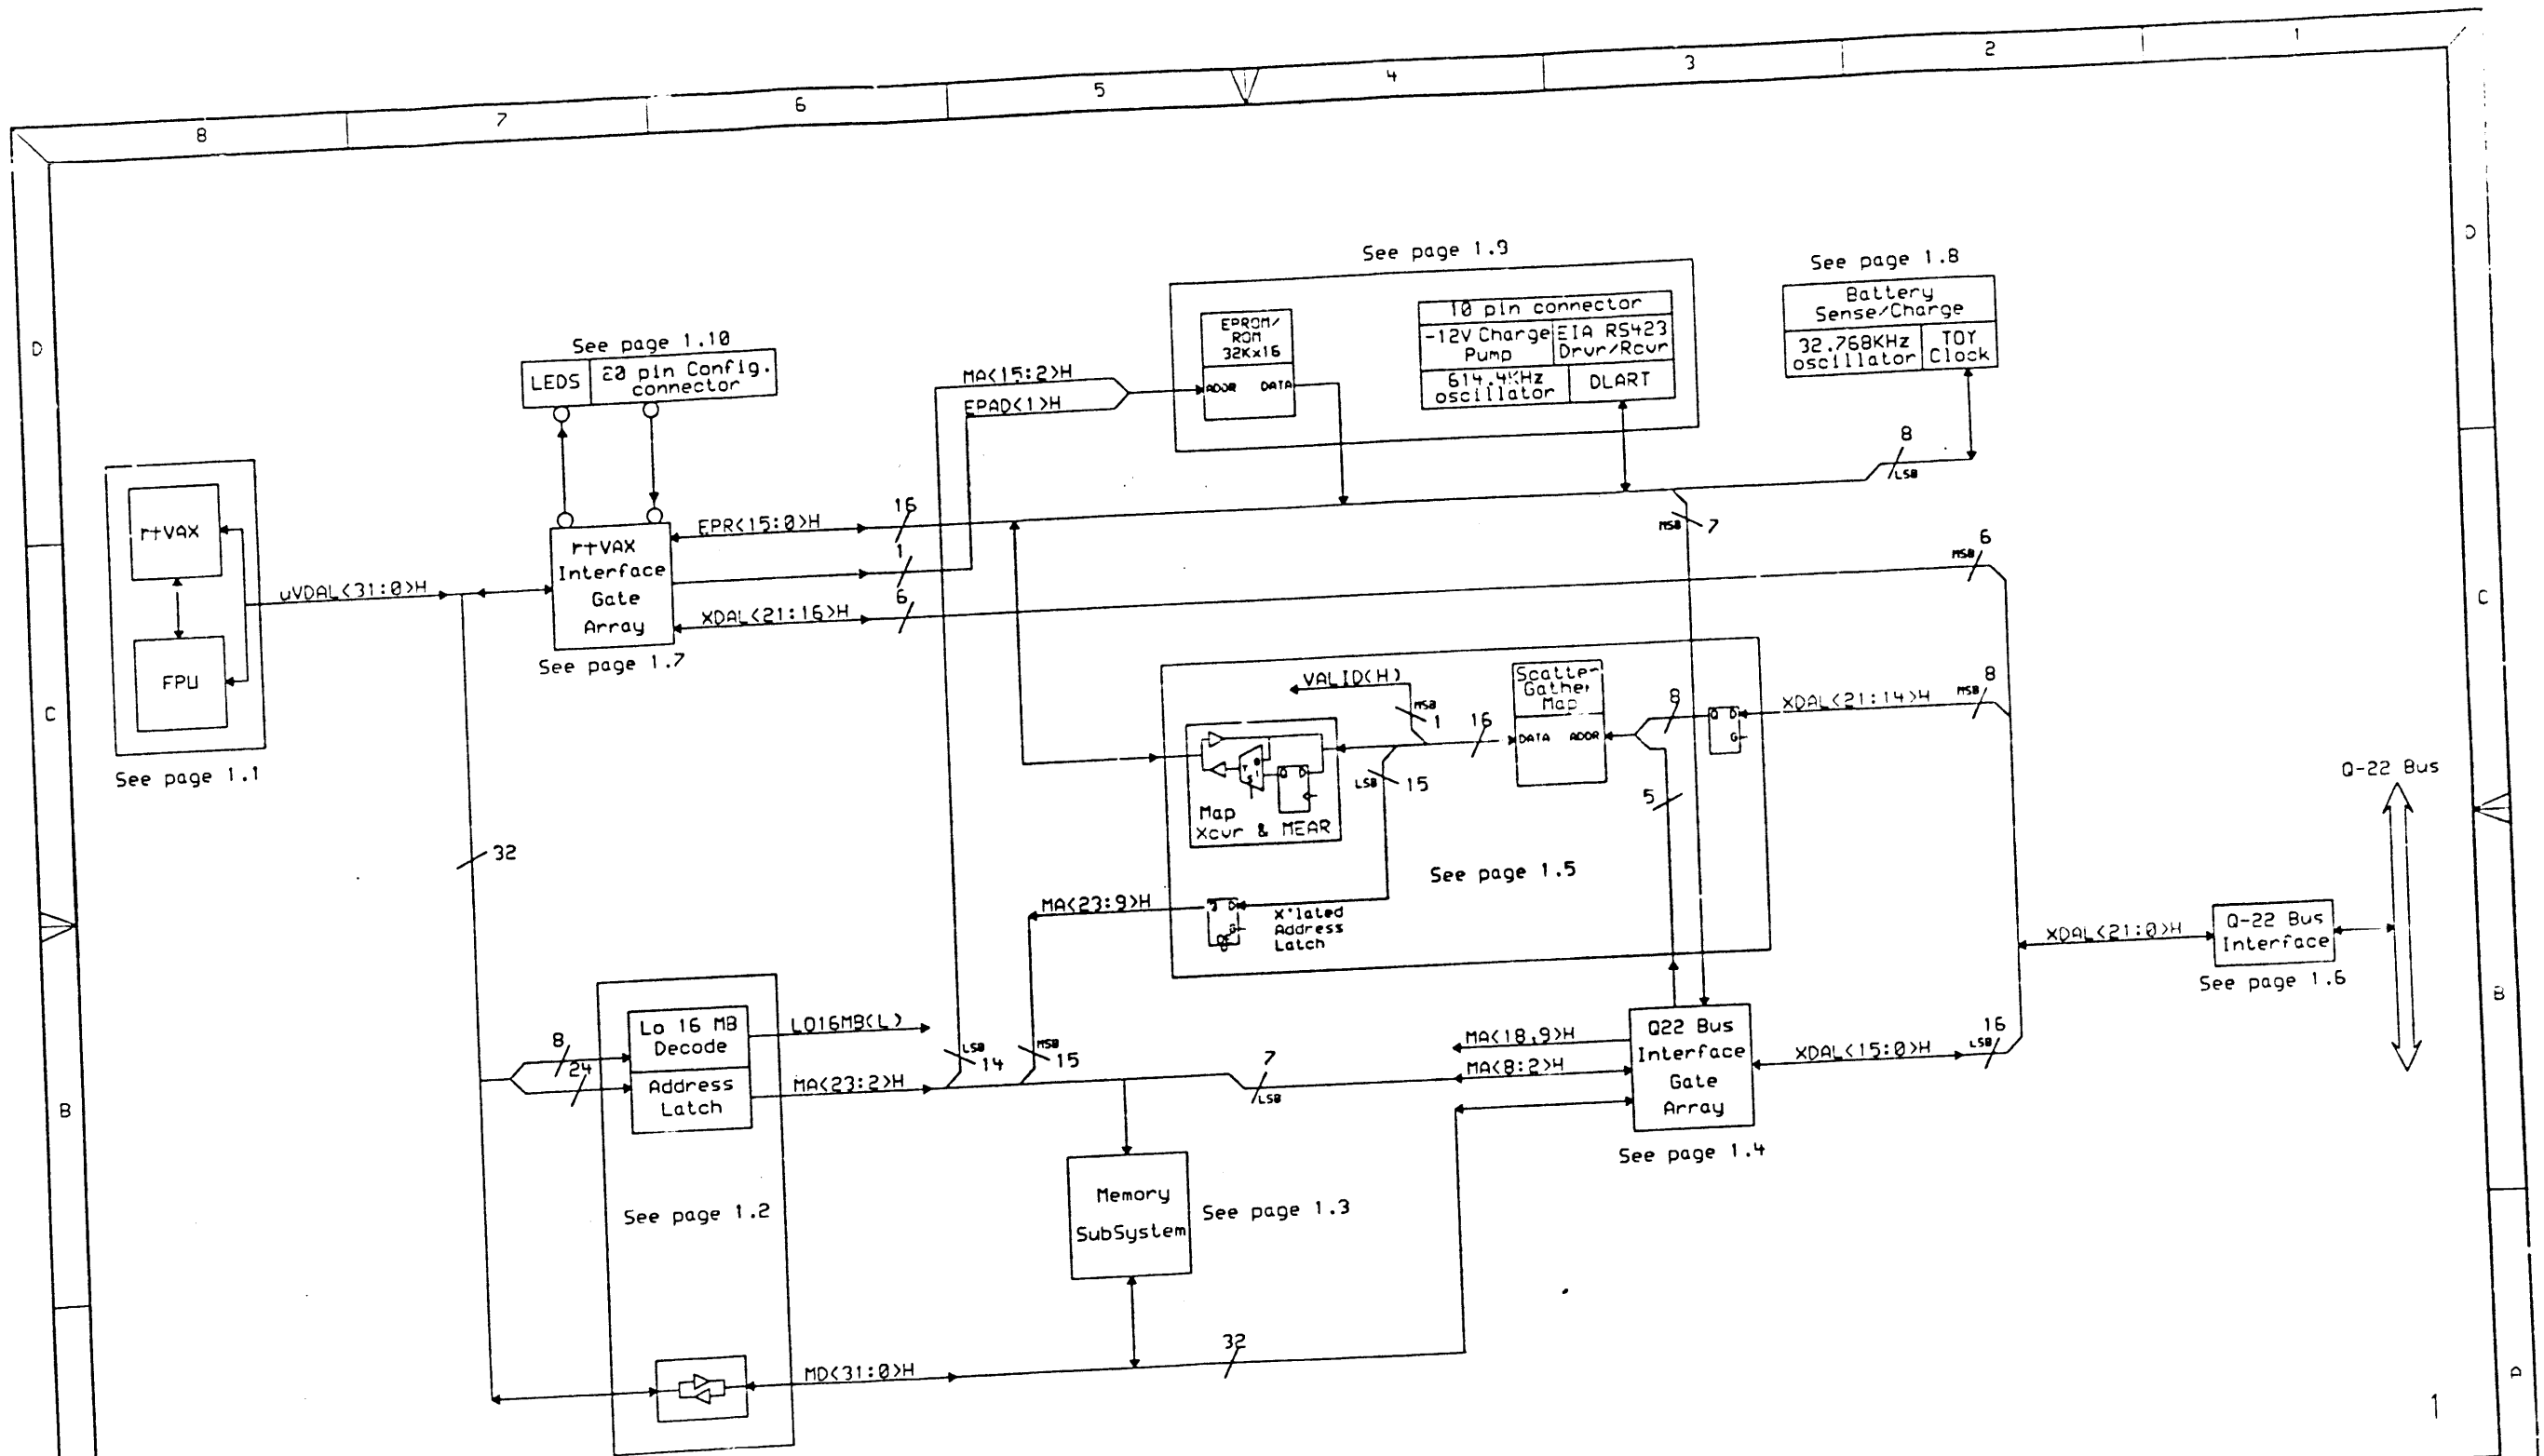

*THIS DRAWING AND SPECIFICATIONS, HEREIN, ARE THE PROPERTY OF DIGITAL EQUIPMENT CORPORATION AND SHALL NOT BE REPRODUCED OR COPIED OR USED IN WHOLE OR IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION.
 COPYRIGHT 1986 DIGITAL EQUIPMENT CORPORATION


REVISION HISTORY		
REV	TECD	NUMBER

DRAWING
 TITLE=
 ABBREV=
 CIRCUIT+TYPE=
 LAST+MODIFIED=


DEFINE
 X+FIRST=0
 X+STEP=SIZE



DRN: ERW	DATE 8-19-86	ENG: E. Williams	DATE 8-19-86
CHK'D: ERW	DATE 8-19-86	SHEET 1 OF 1	TITLE: KA620 - RTVAX on Q22 Bus
NEXT HIGHER ASSEMBLY:			SIZE CODE NUMBER REV D CS M7473-0-3 A

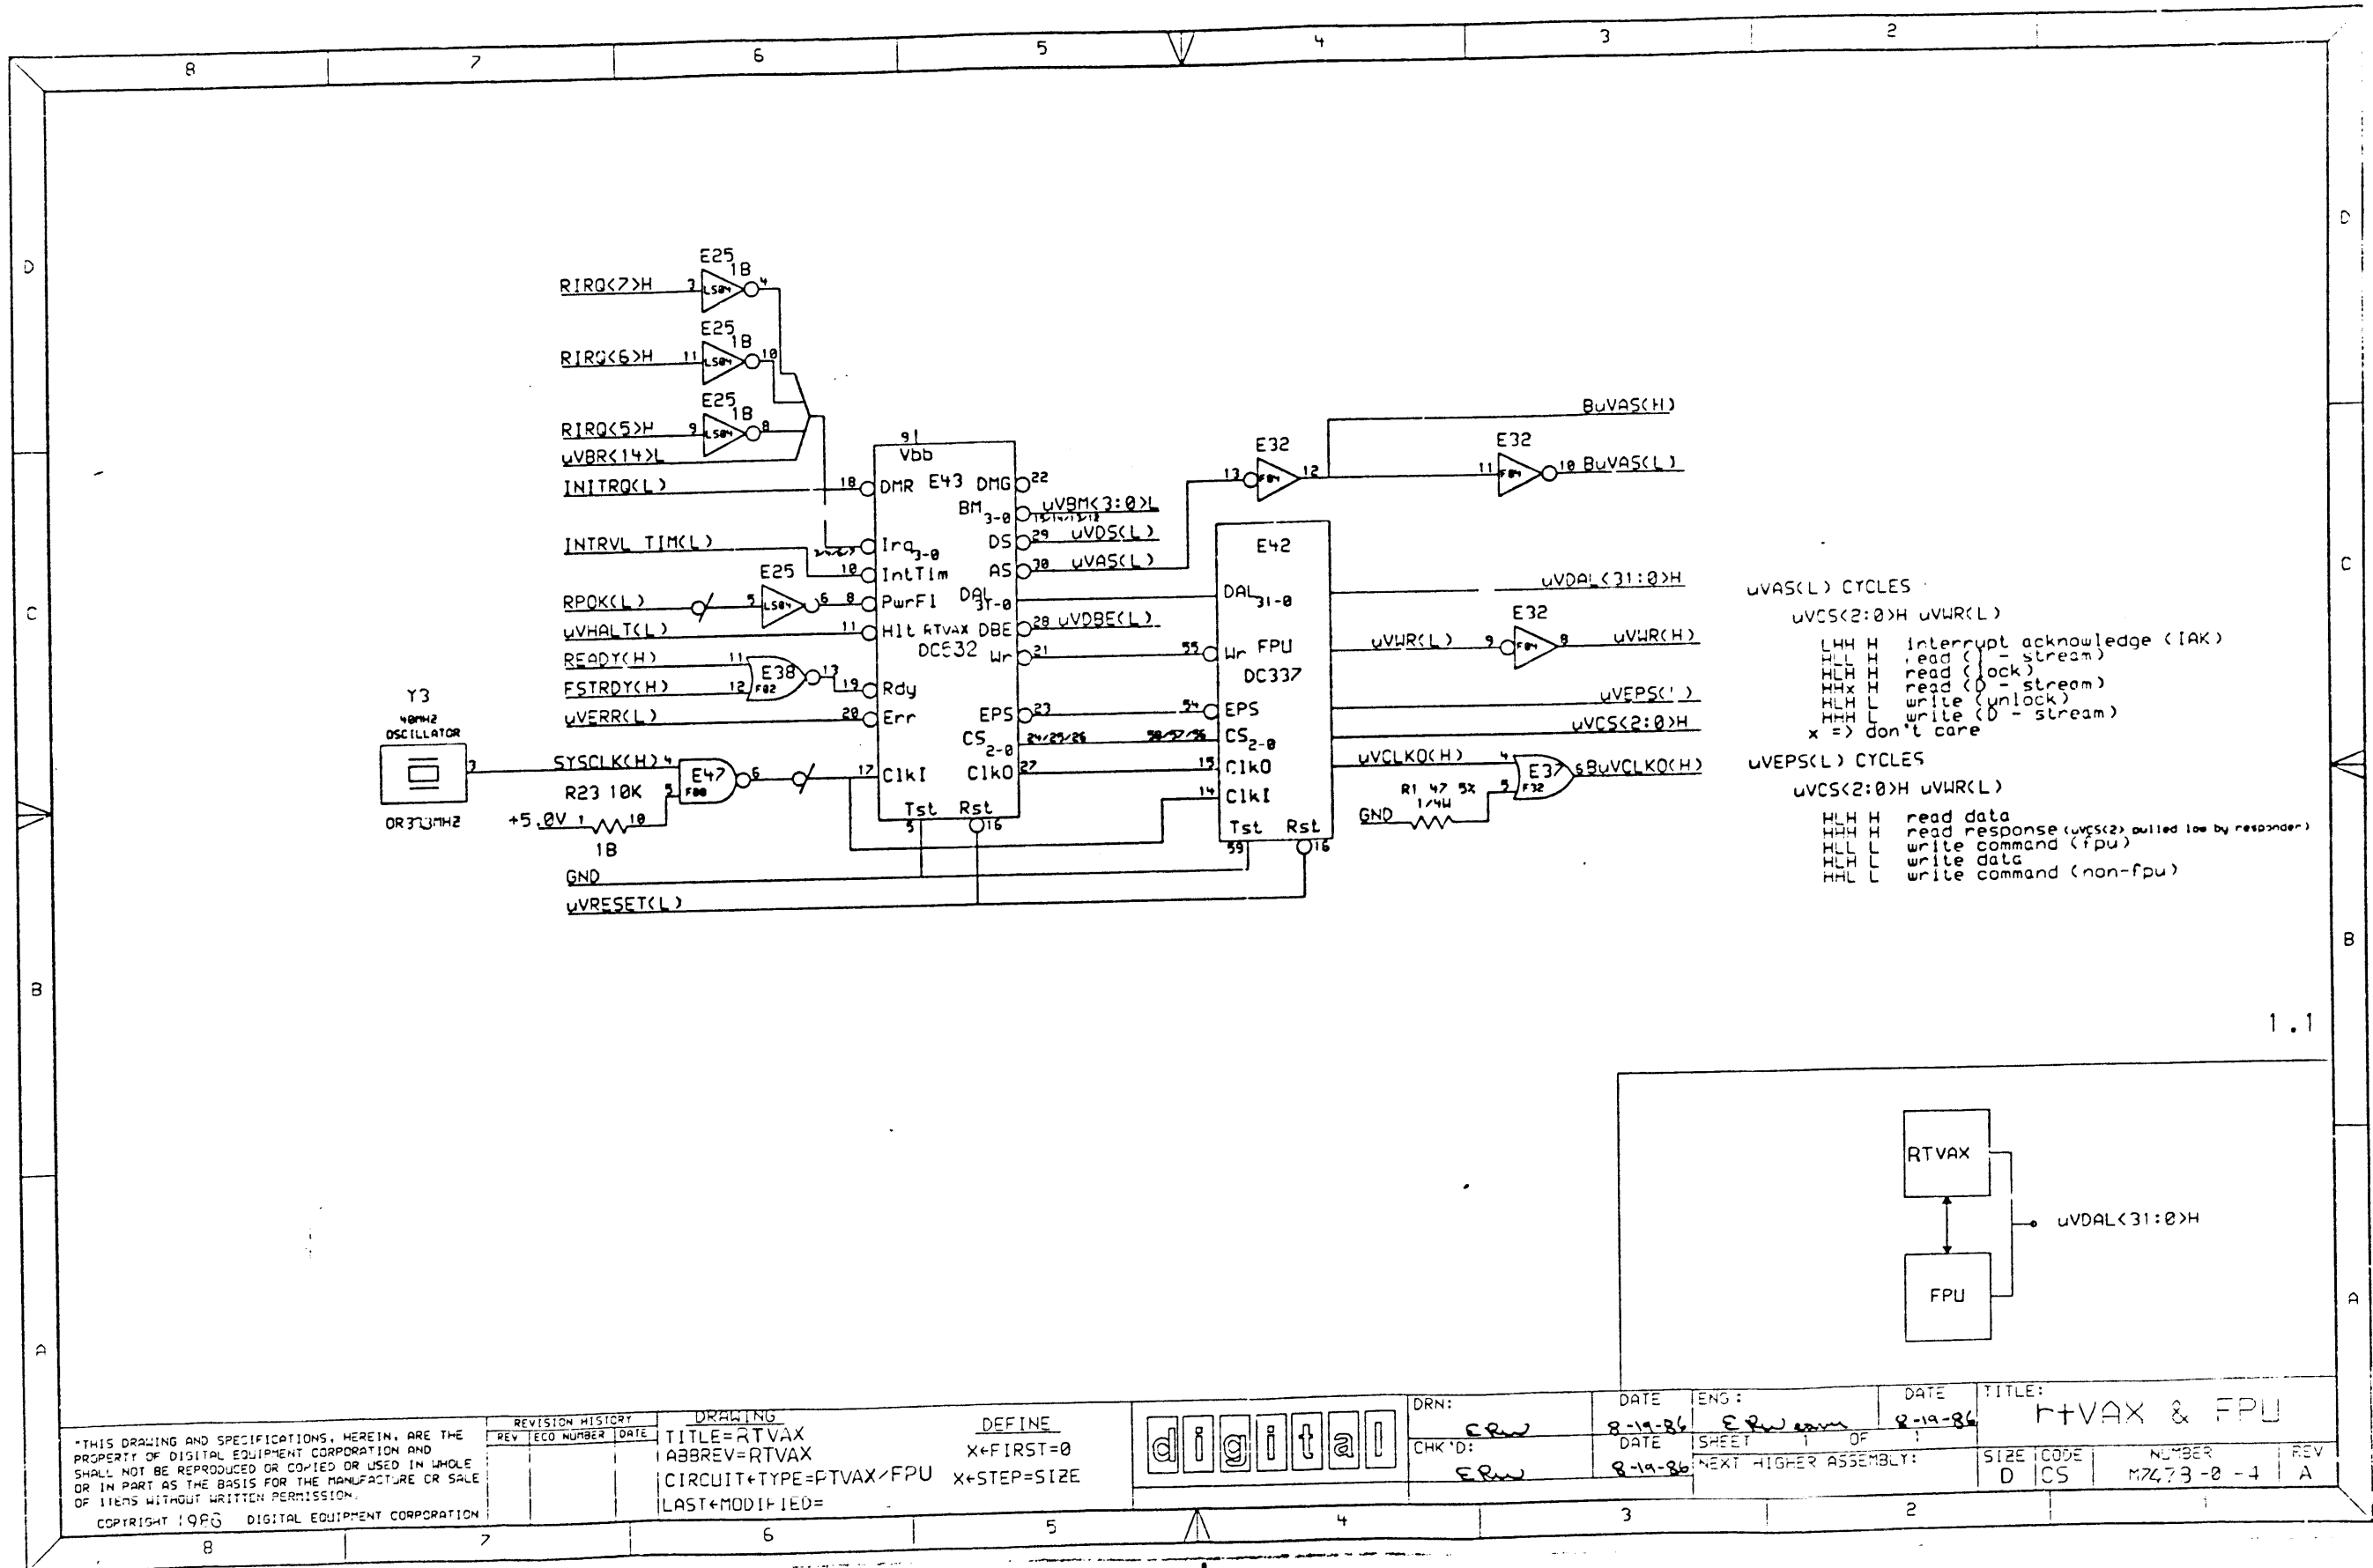


1.1

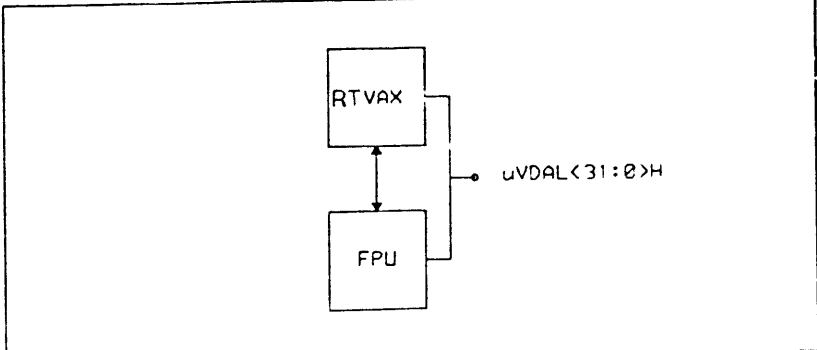

*THIS DRAWING AND SPECIFICATIONS, HEREIN, ARE THE PROPERTY OF DIGITAL EQUIPMENT CORPORATION AND SHALL NOT BE REPRODUCED OR COPIED OR USED IN WHOLE OR IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION.
 COPYRIGHT 1986 DIGITAL EQUIPMENT CORPORATION



REVISION HISTORY		
REV	ECO NUMBER	DATE

DRAWING
 TITLE=RTVAX
 ABBREV=RTVAX
 CIRCUIT+TYPE=FTVAX/FPU
 LAST+MODIFIED=
 DEFINE
 X+FIRST=0
 X+STEP=SIZE



DRN:	DATE	ENG:	DATE	TITLE:
ERW	8-19-86	ERW	8-19-86	RTVAX & FPU
CHK'D:	DATE	SHEET	OF	
ERW	8-19-86			

NEXT HIGHER ASSEMBLY:	SIZE	CODE	NUMBER	REV
	D	CS	M7473-0-4	A

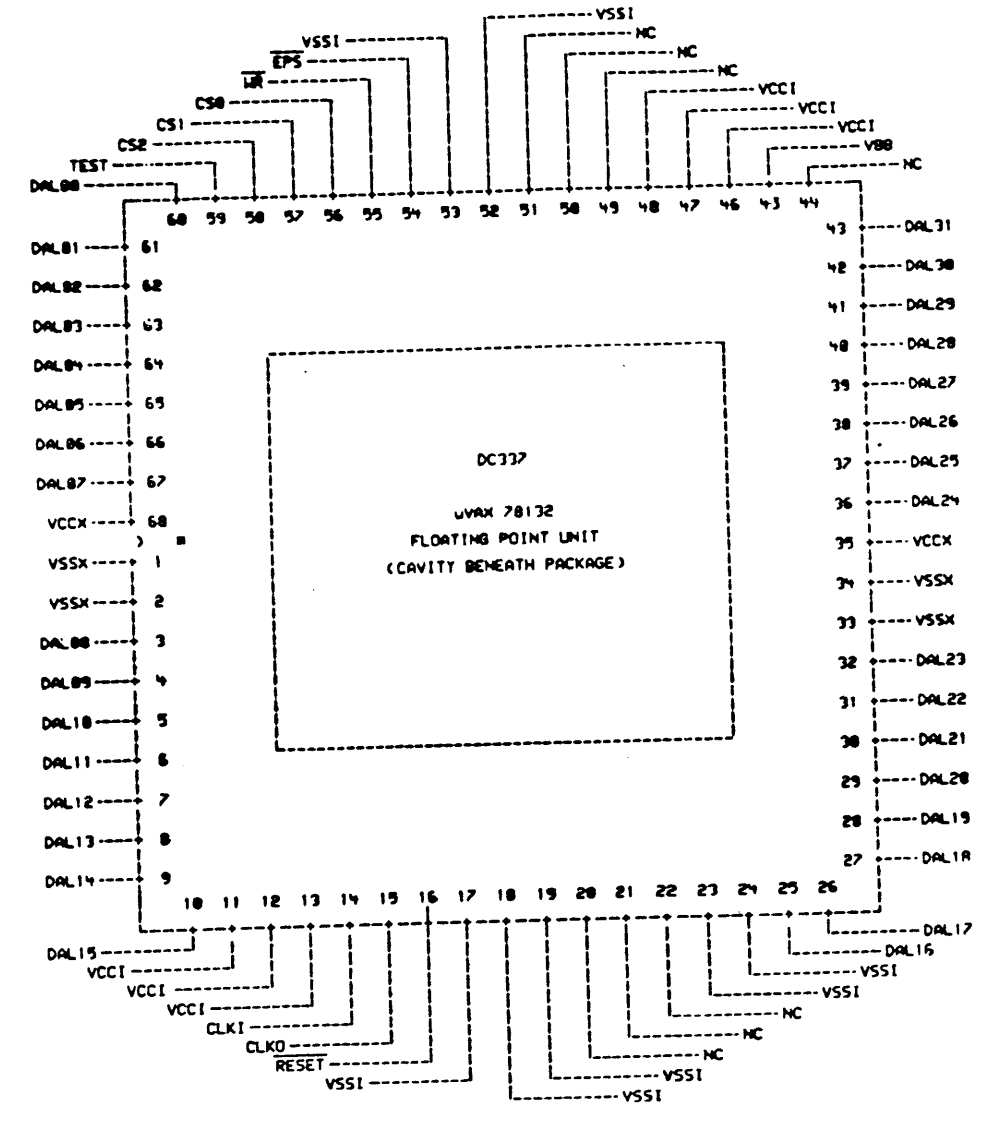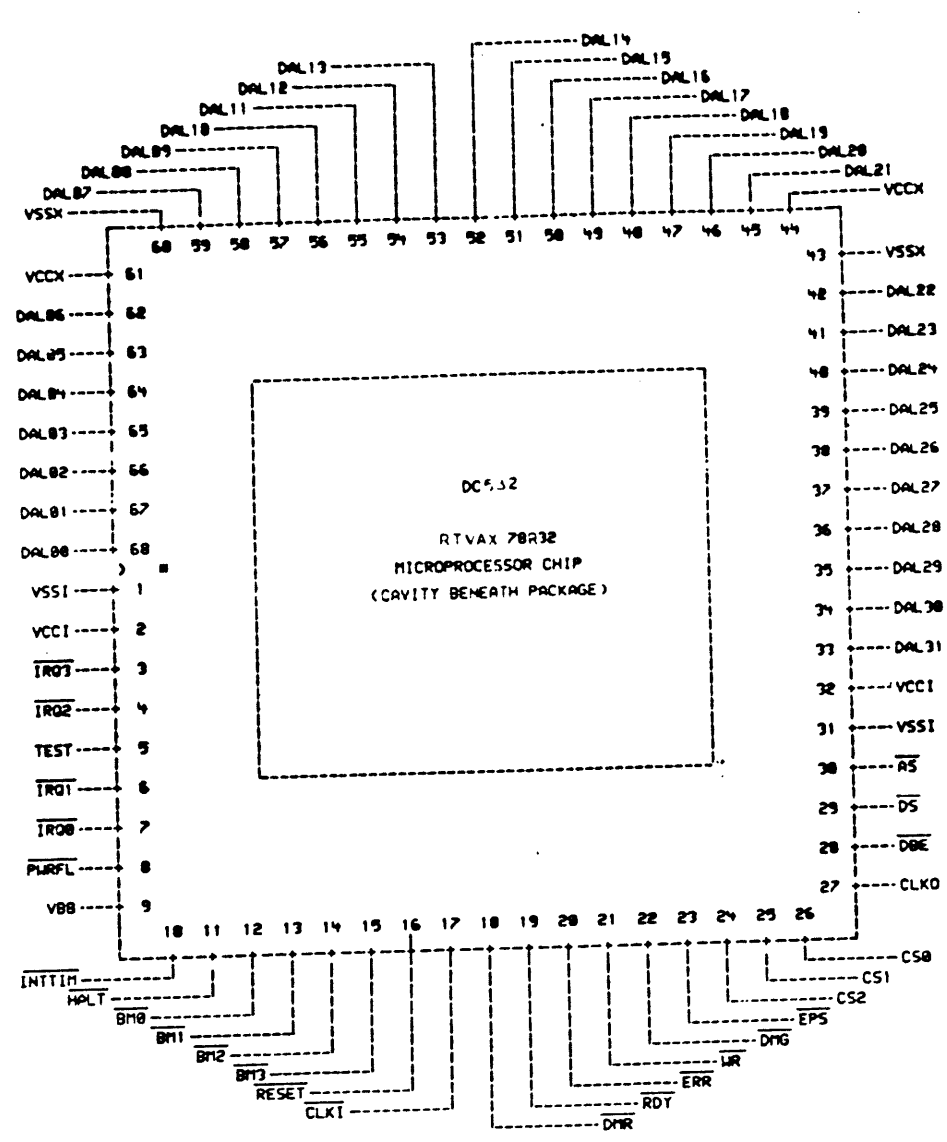


1.1.1

THIS DRAWING AND SPECIFICATIONS HEREIN ARE THE PROPERTY OF DIGITAL EQUIPMENT CORPORATION AND SHALL NOT BE REPRODUCED OR COPIED OR USED IN WHOLE OR IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION. COPYRIGHT © 1984 DIGITAL EQUIPMENT CORPORATION.

REVISIONS		
CHK	CHANGE NO.	REV.

digital	DATE: 9-11-84	ENG: E. P. ...	DATE: 9-11-84	TITLE: RTVAX & FPU PINOUTS
	DATE: 8-14-84	CHK'D: E. P. ...	DATE: 8-14-84	BOARD LOCATION: OF 1
FIRST USED ON OPTION/MODEL:		NEXT HIGHER ASSEMBLY:		SIZE CODE: DICS M7478-0-5
NUMBER: 2			REV. A	

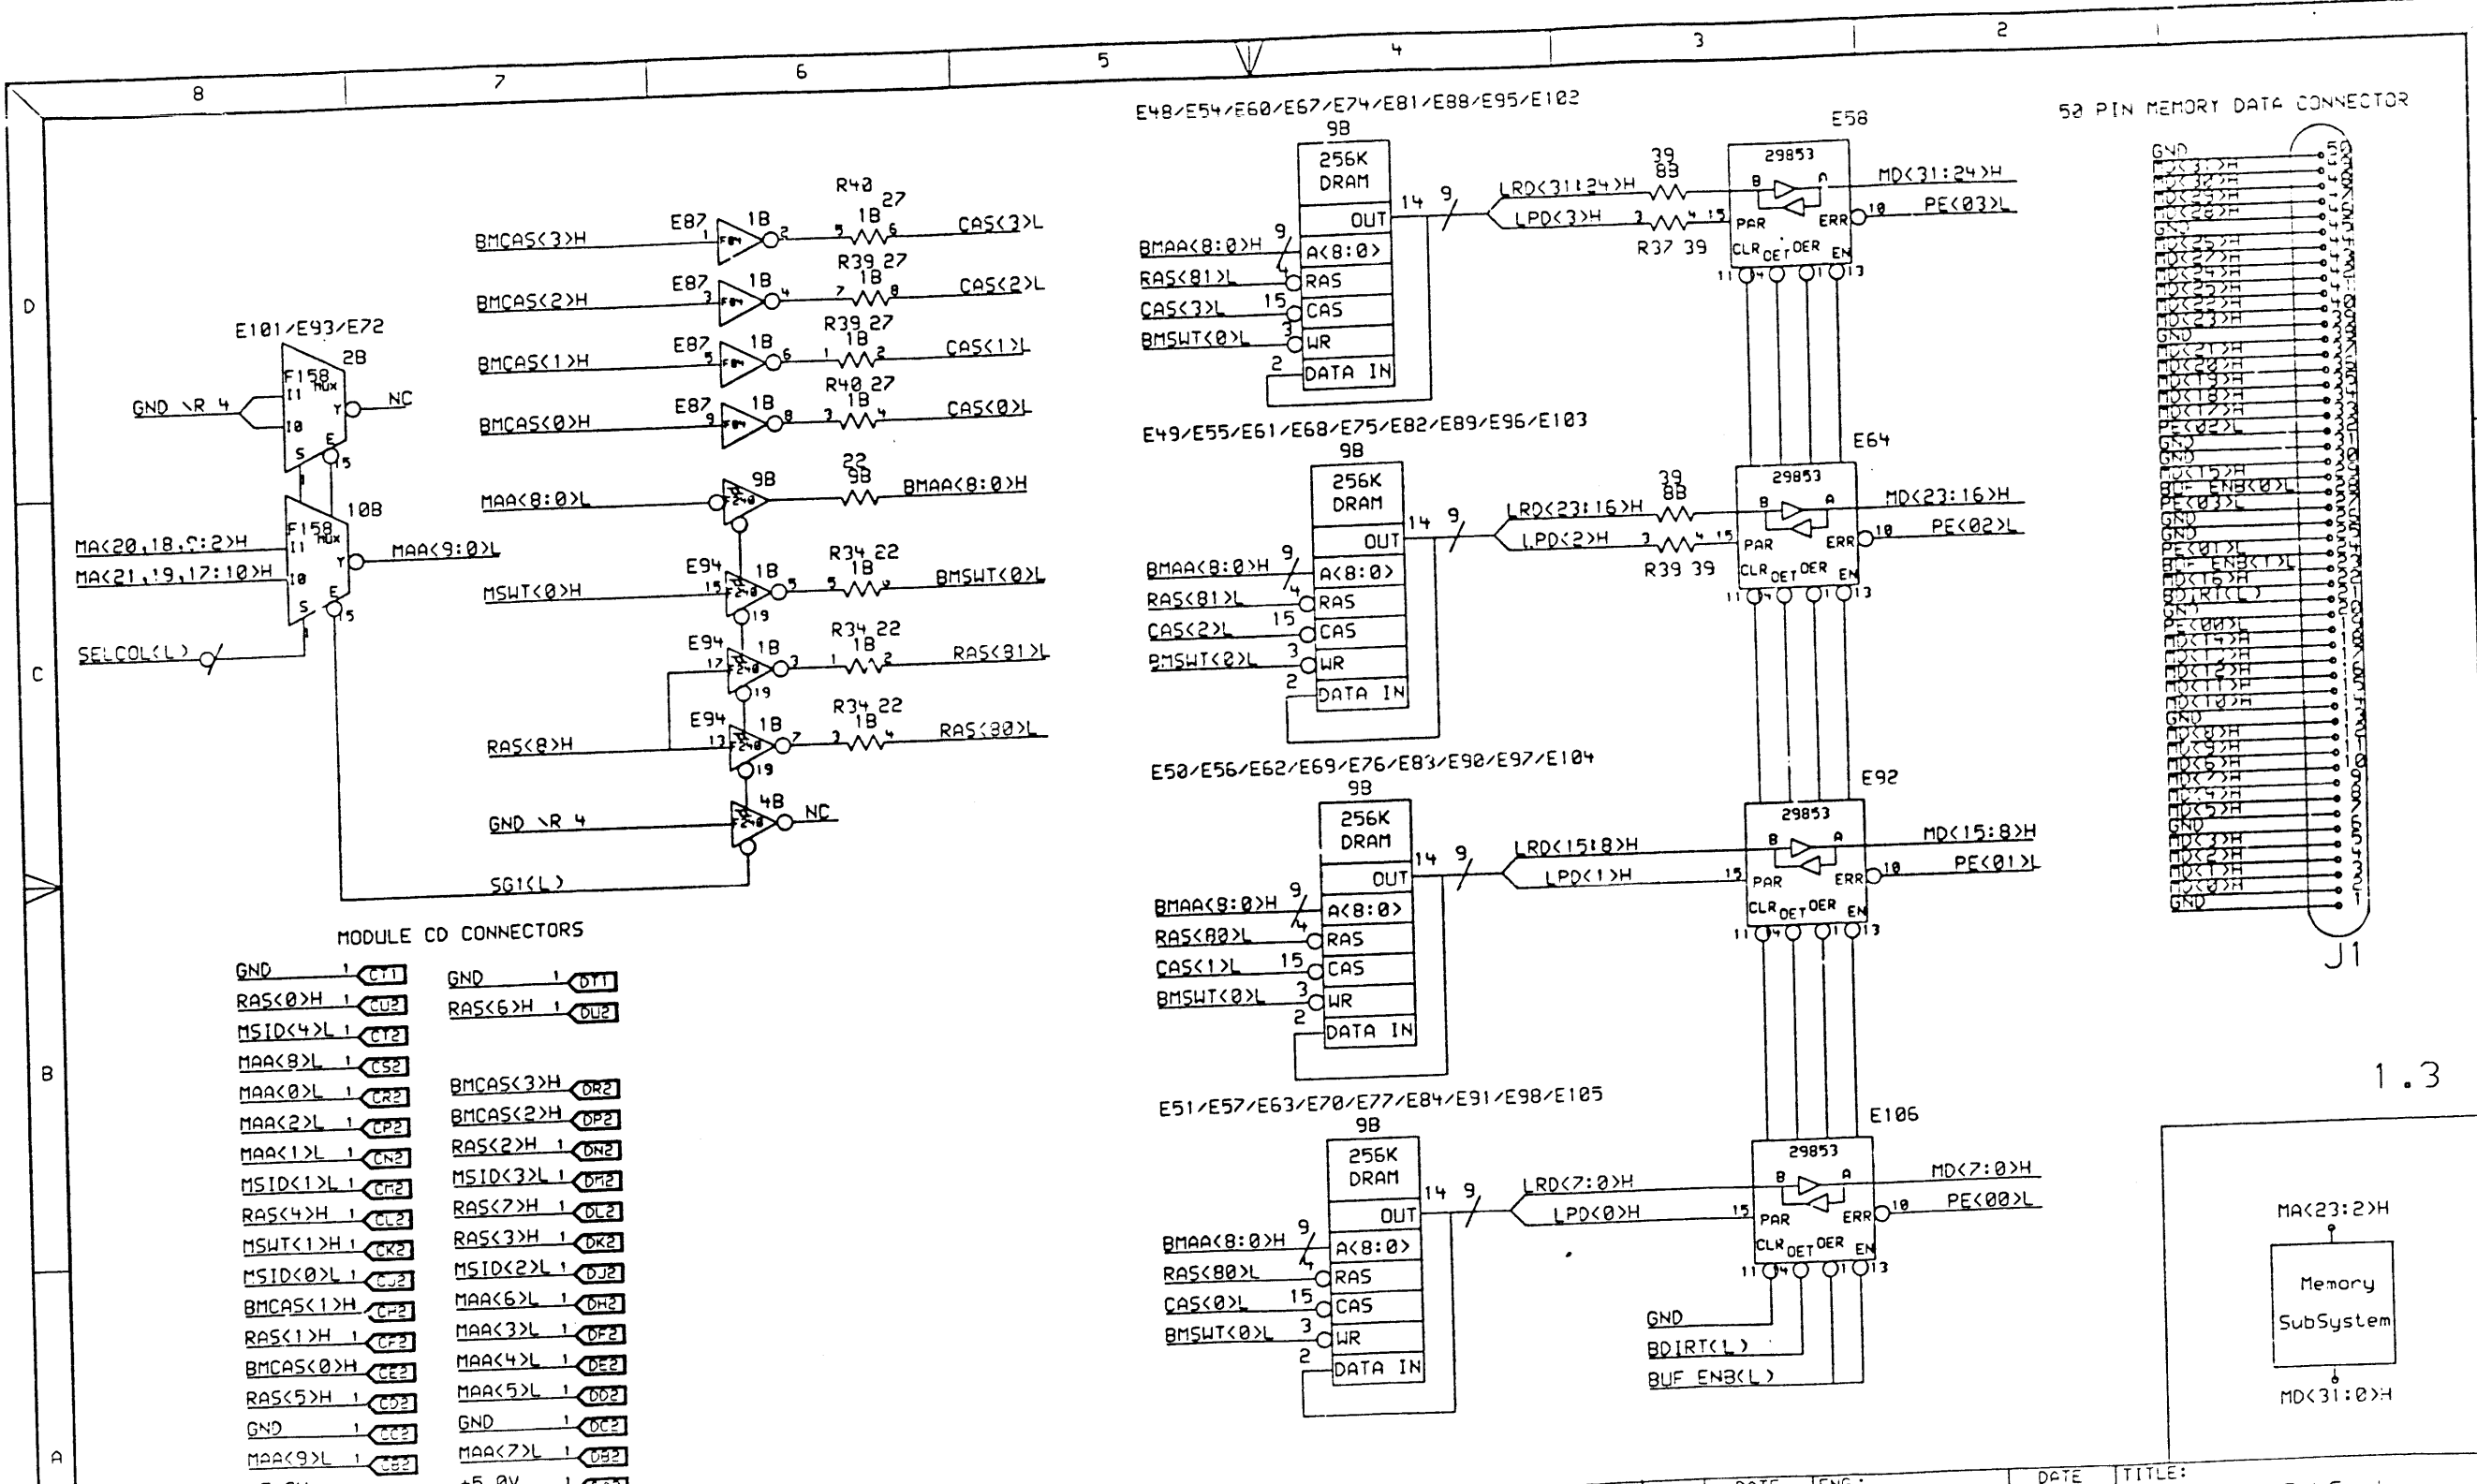

MODULE CD CONNECTORS

GND	1	CT1	GND	1	DT1
RAS<0>H	1	CU2	RAS<6>H	1	DU2
MSID<4>L	1	CT2			
MAA<8>L	1	CS2	BMCAS<3>H	1	DR2
MAA<0>L	1	CR2	BMCAS<2>H	1	DP2
MAA<2>L	1	CP2	RAS<2>H	1	DN2
MAA<1>L	1	CN2	MSID<3>L	1	DM2
MSID<1>L	1	CM2	RAS<7>H	1	DL2
RAS<4>H	1	CL2	RAS<3>H	1	DK2
MSWT<1>H	1	CK2	MSID<2>L	1	DJ2
MSID<0>L	1	CJ2	MAA<6>L	1	DM2
BMCAS<1>H	1	CP2	MAA<3>L	1	DN2
RAS<1>H	1	CF2	MAA<4>L	1	DE2
BMCAS<0>H	1	CE2	MAA<5>L	1	DD2
RAS<5>H	1	CD2	GND	1	DC2
GND	1	CC2	MAA<9>L	1	DB2
MAA<9>L	1	CB2	+5.0V	1	DA2
+5.0V	1	CA2			


*THIS DRAWING AND SPECIFICATIONS, HEREIN, ARE THE PROPERTY OF DIGITAL EQUIPMENT CORPORATION AND SHALL NOT BE REPRODUCED OR COPIED OR USED IN WHOLE OR IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION.

DATE: 8-19-86
 DATE: 8-19-86



REVISION HISTORY		
REV	ECD NUMBER	DATE

DRAWING TITLE=MEM
 ABBREV=MEM
 CIRCUIT+TYPE=MEMOERY
 LAST+MODIFIED=


DEFINE
 X+FIRST=0
 X+STEP=SIZE



DRN: E.R.	DATE: 8-19-86	ENG: E.R.	DATE: 8-19-86	TITLE: Memory SubSystem
CHK'D: E.R.	DATE: 8-19-86	SHEET: 1 OF 1	NEXT HIGHER ASSEMBLY:	SIZE: D CS
				NUMBER: 147173-0-7
				REV: A

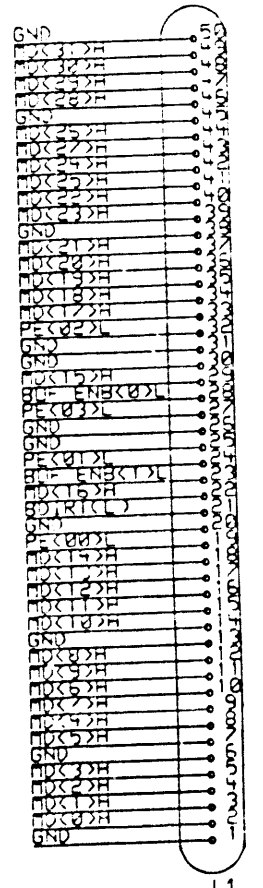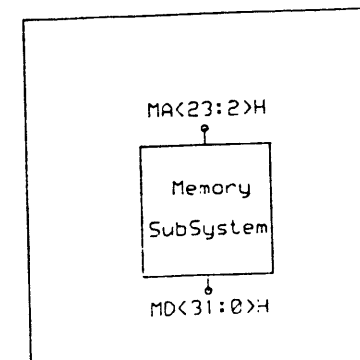

1.3

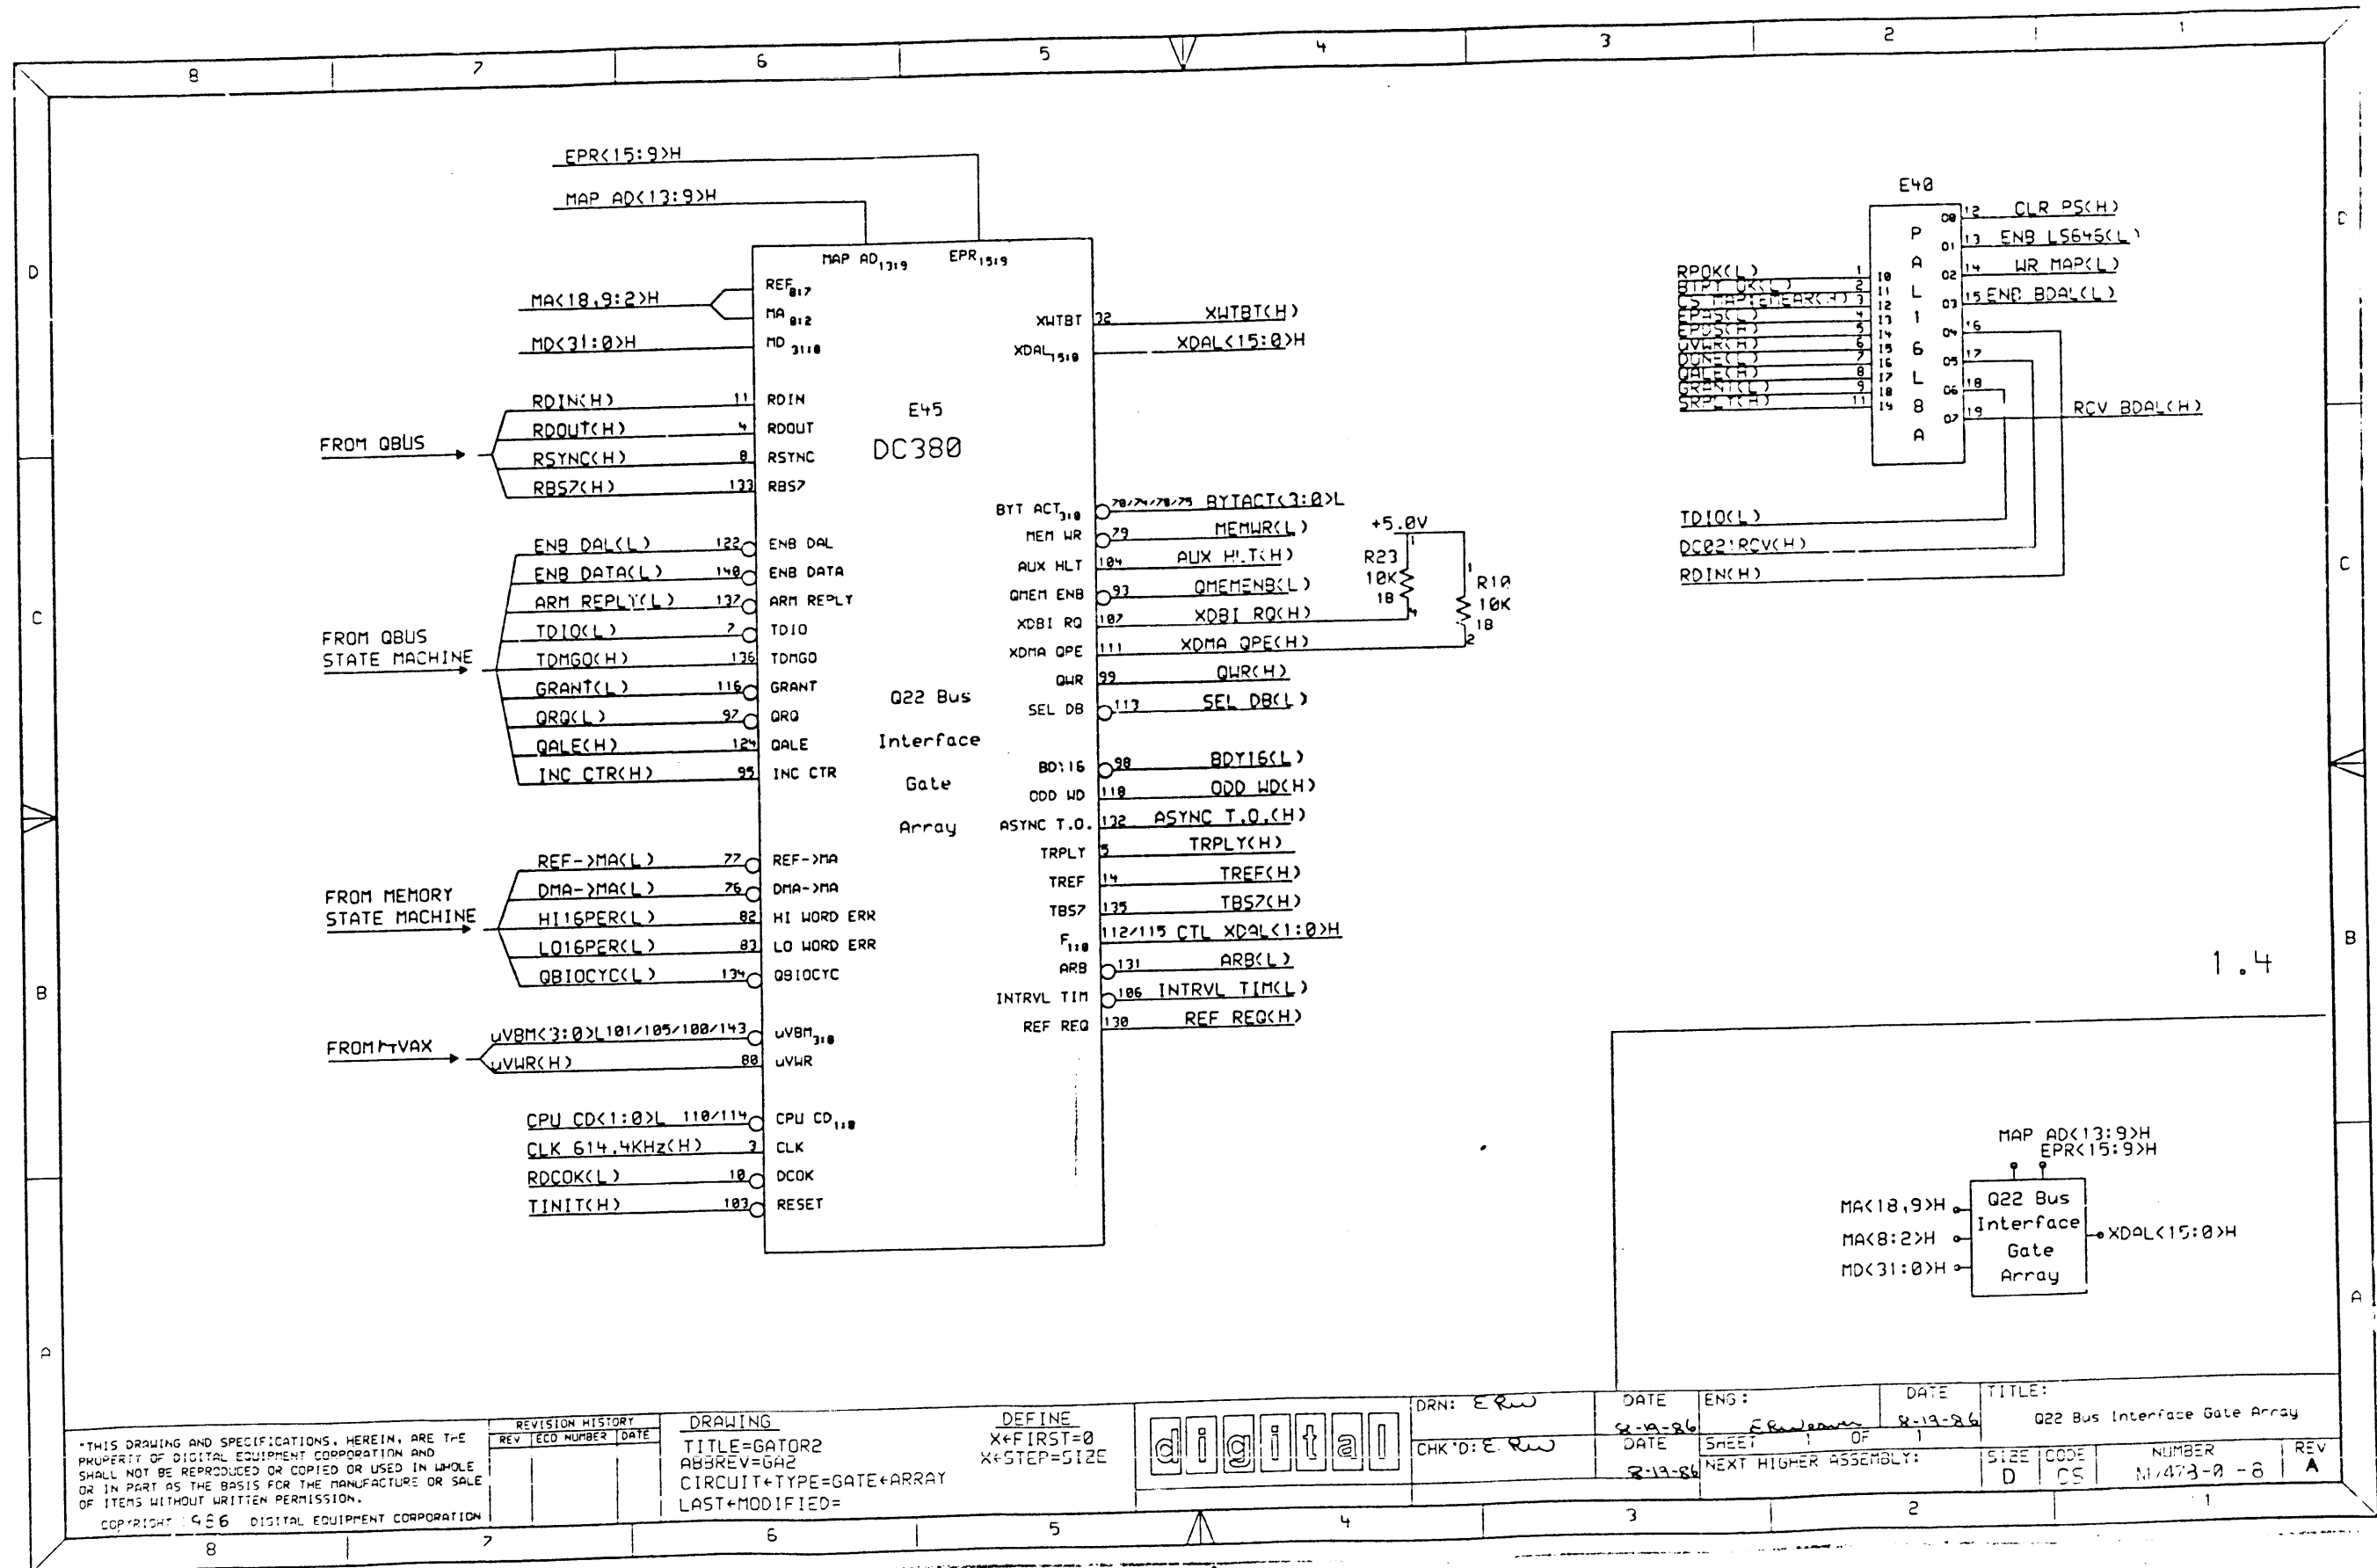

*THIS DRAWING AND SPECIFICATIONS, HEREIN, ARE THE PROPERTY OF DIGITAL EQUIPMENT CORPORATION AND SHALL NOT BE REPRODUCED OR COPIED OR USED IN WHOLE OR IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION.
 COPYRIGHT © 1986 DIGITAL EQUIPMENT CORPORATION

REVISION HISTORY		
REV	ECO NUMBER	DATE

DRAWING
 TITLE=GATOR2
 ABBREV=GAZ
 CIRCUIT+TYPE=GATE+ARRAY
 LAST+MODIFIED=


DEFINE
 X+FIRST=0
 X+STEP=SIZE



DRN: ERW
 DATE: 8-19-86
 CHK'D: ERW
 DATE: 8-19-86

ENG: ERW
 DATE: 8-19-86
 SHEET 1 OF 1
 NEXT HIGHER ASSEMBLY:

TITLE: Q22 Bus Interface Gate Array
 SIZE: D
 CODE: CS
 NUMBER: M473-0-8
 REV: A

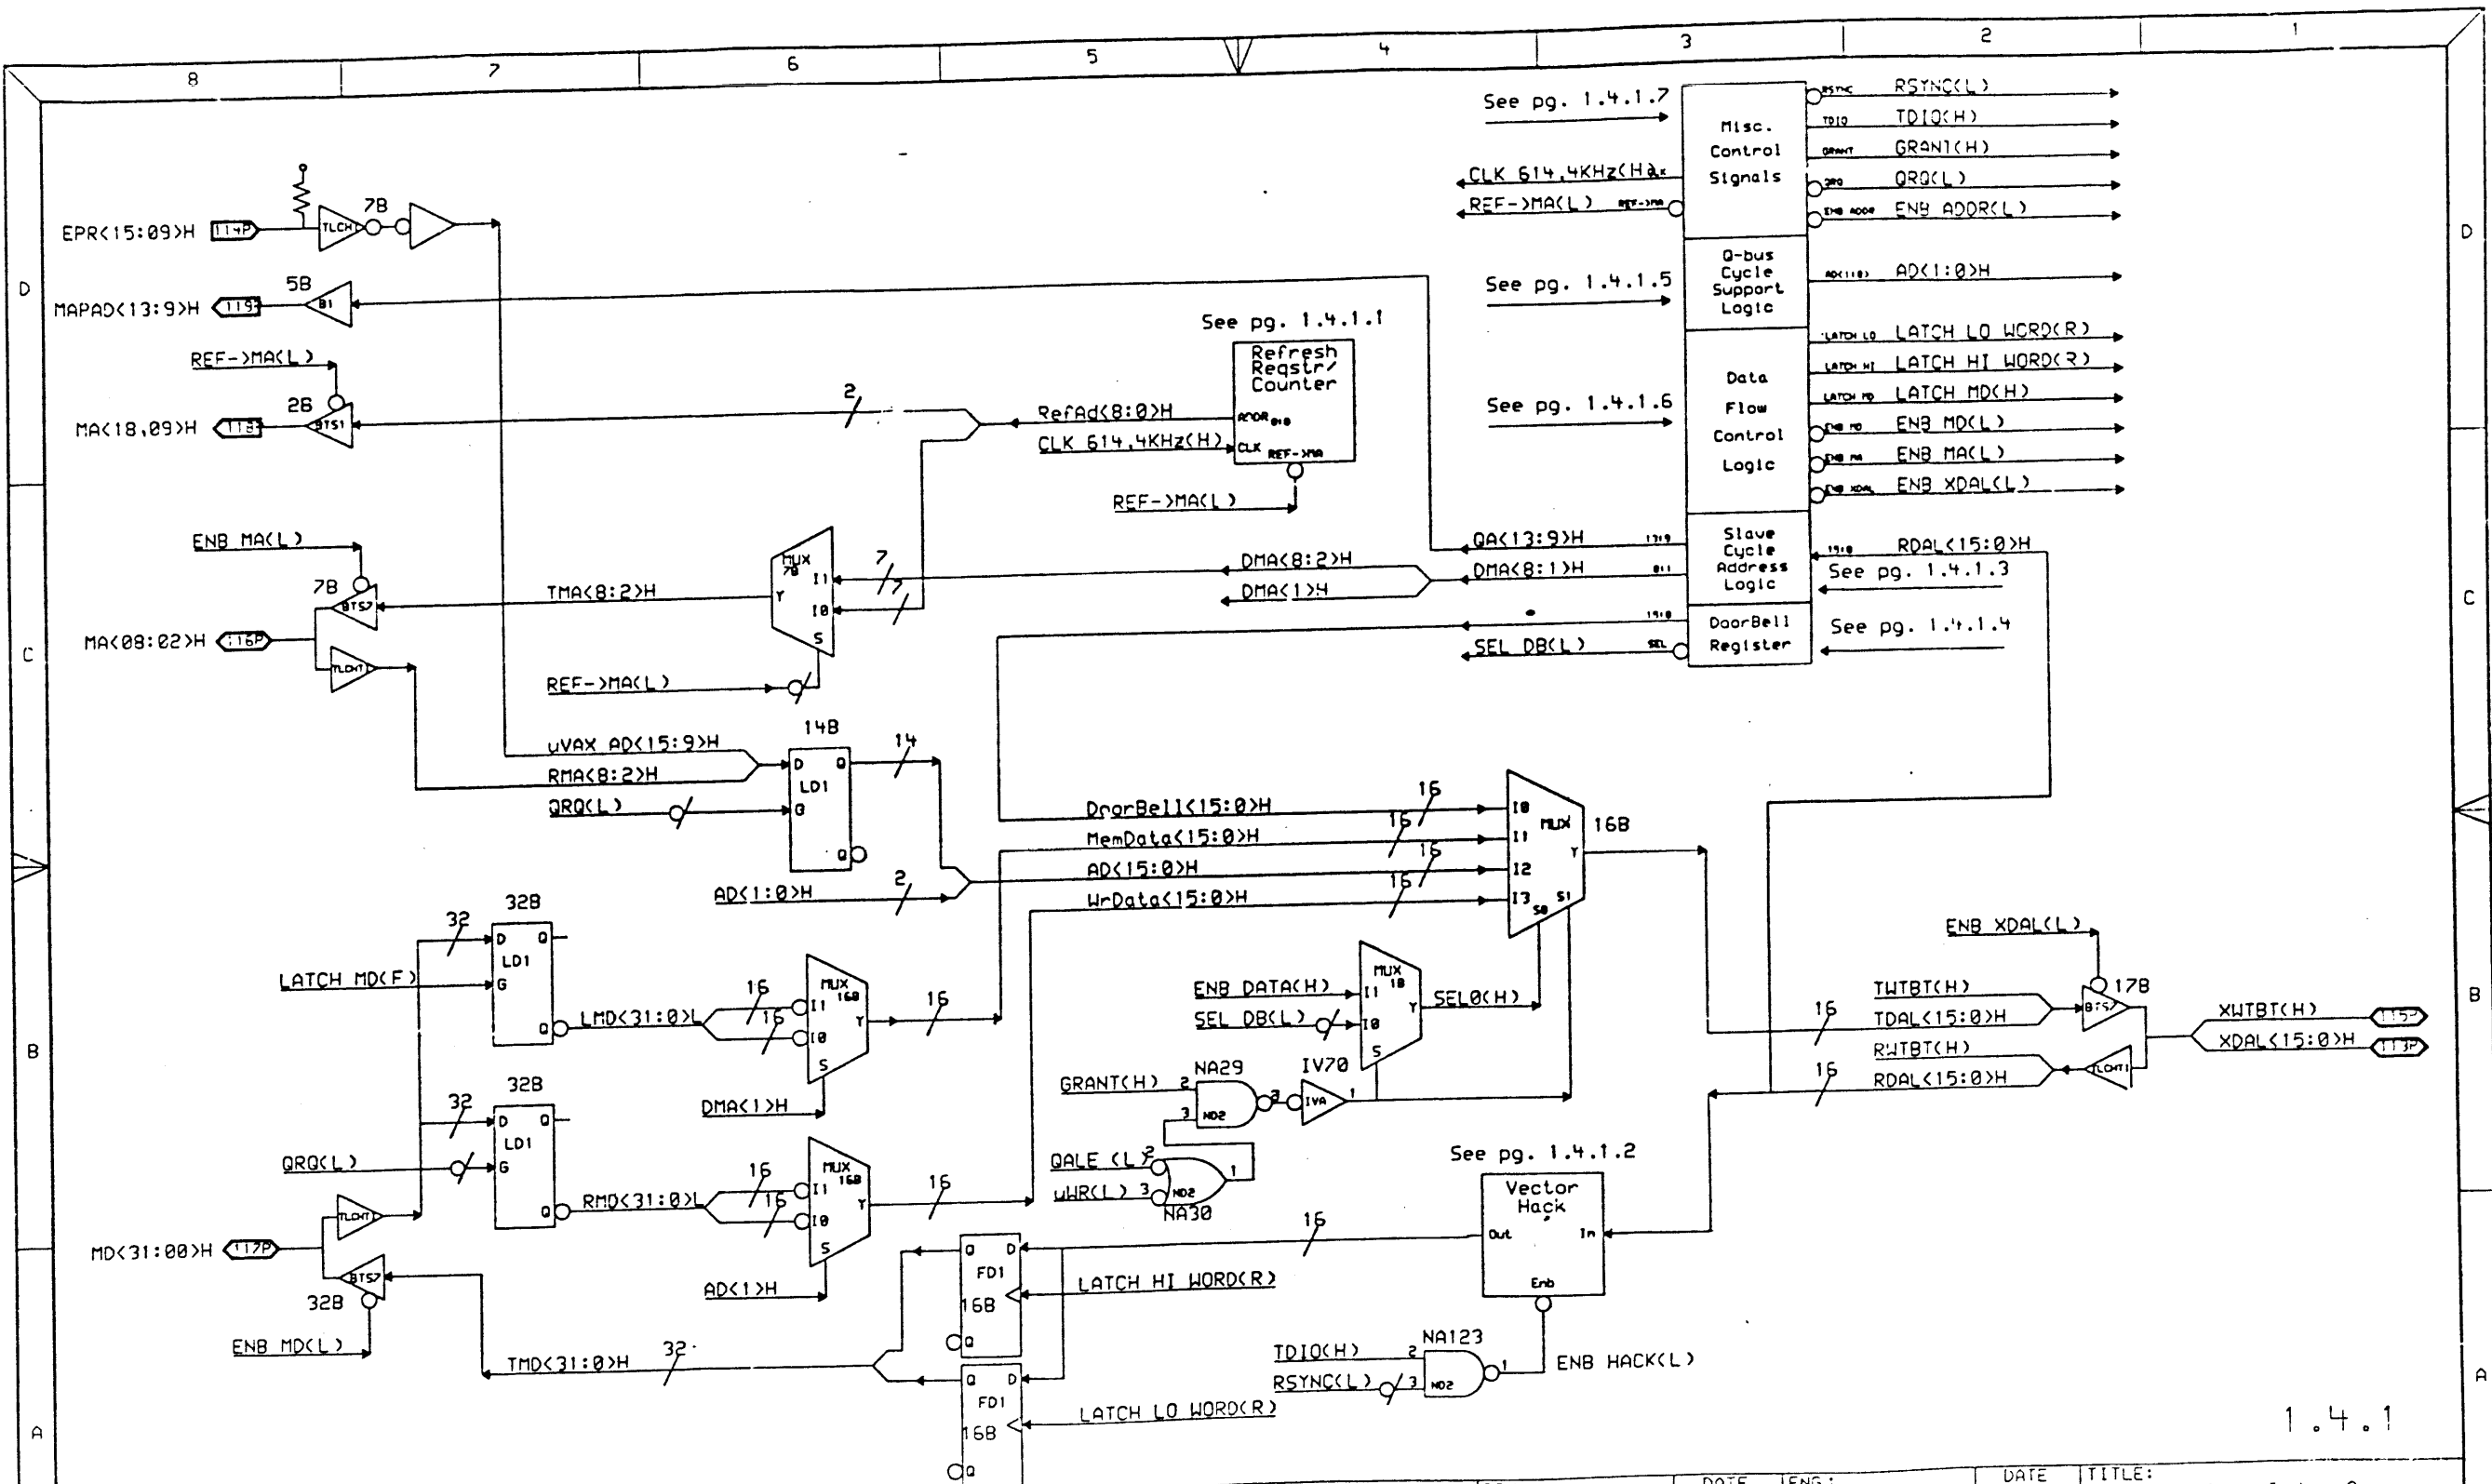

1.4.1

THIS DRAWING AND SPECIFICATIONS, HEREIN, ARE THE PROPERTY OF DIGITAL EQUIPMENT CORPORATION AND SHALL NOT BE REPRODUCED OR COPIED OR USED IN WHOLE OR IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION.
 COPYRIGHT 1985 DIGITAL EQUIPMENT CORPORATION

REVISION HISTORY		
REV	ECO NUMBER	DATE


DRAWING
 TITL F=GA2
 ABBREV=GA2
 LAST+MODIFIED=

DEFINE
 X+FIRST=0
 X+STEP=SIZE




DRN:	DATE	ENG:	DATE	TITLE:
	8-19-86	S. Sullivan	8-19-86	Q22 Bus Interface Gate Array
CHK'D:	DATE	SHEET	OF	
	8-19-86	1	1	
NEXT HIGHER ASSEMBLY:				

SIZE	CODE	NUMBER	REV
D	CS	M7478-0-3	A

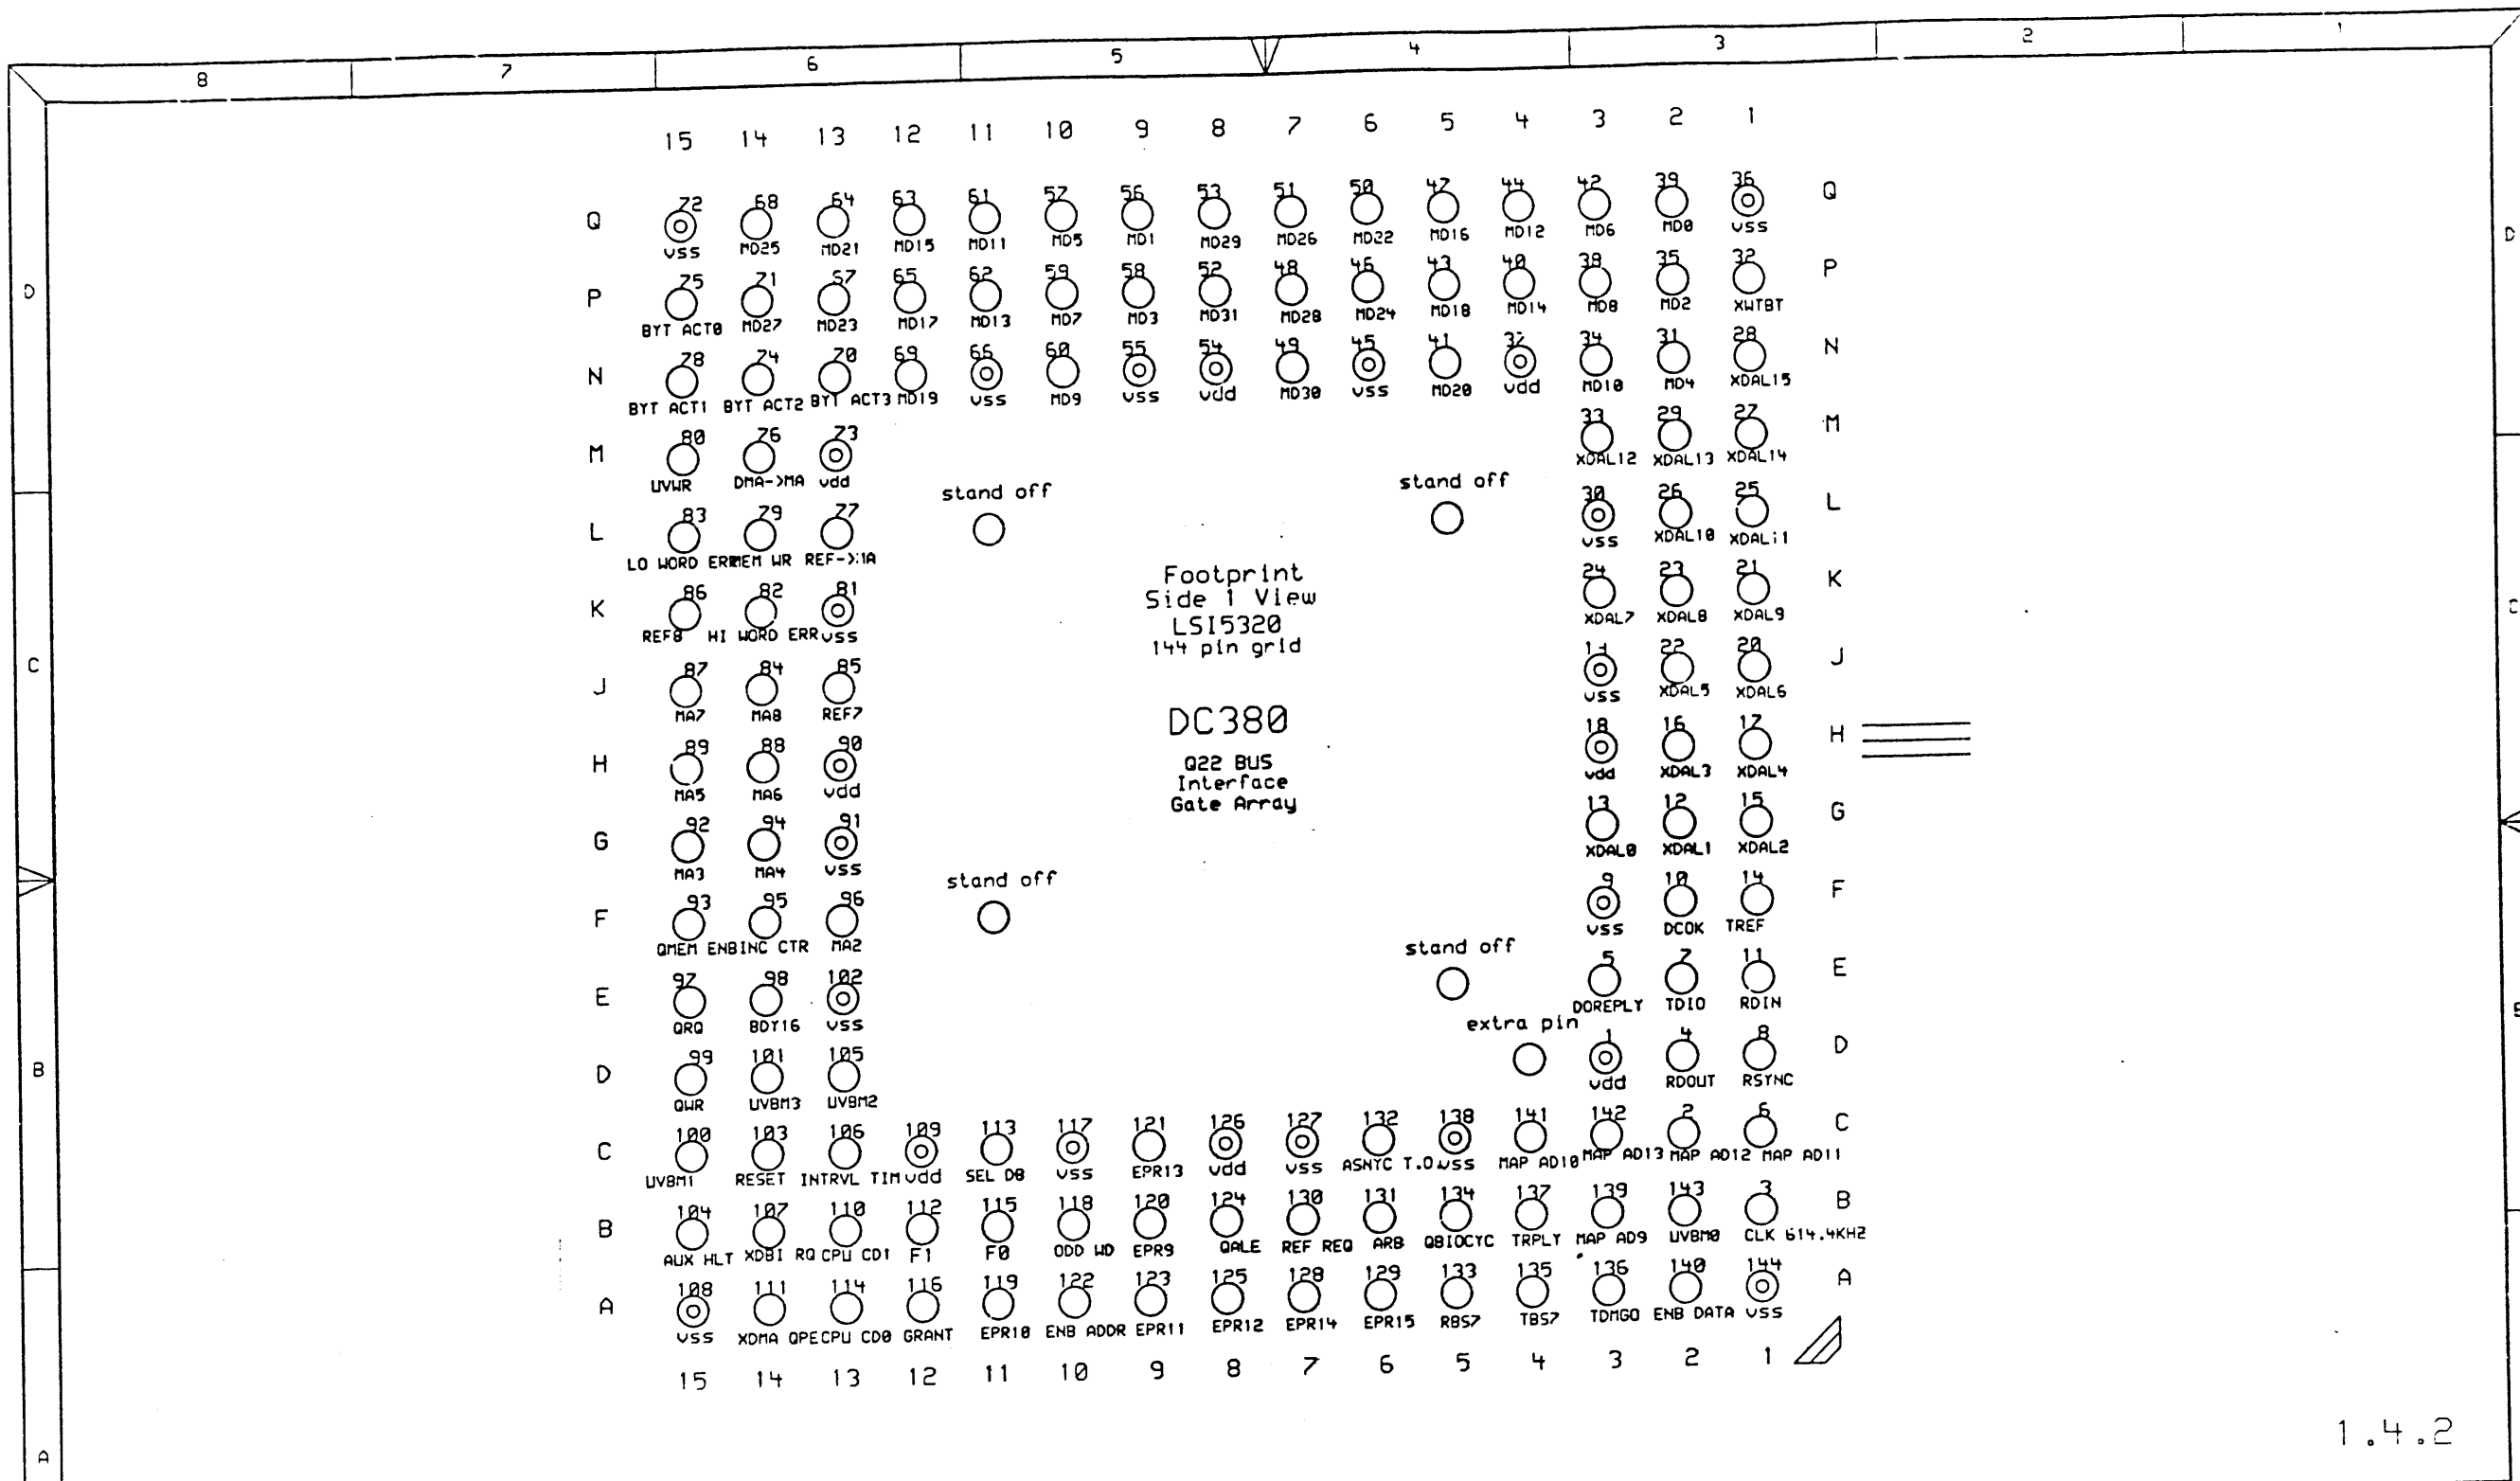

1.4.2

*THIS DRAWING AND SPECIFICATIONS, HEREIN, ARE THE PROPERTY OF DIGITAL EQUIPMENT CORPORATION AND SHALL NOT BE REPRODUCED OR COPIED OR USED IN WHOLE OR IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION. COPYRIGHT 1986 DIGITAL EQUIPMENT CORPORATION	REVISION HISTORY REV ECO NUMBER DATE		DRN: <i>F. Sullivan</i>	DATE: 8-19-86	ENG: <i>F. Sullivan</i>	DATE: 8-12-86	TITLE: DC380 PAD ASSIGNMENT TOP VIEW LL5320 IN 144 PIN GRID ARRAY						
	<table border="1" style="width: 100%; border-collapse: collapse; font-size: x-small;"> <tr> <td>SIZE</td><td>CODE</td><td>NUMBER</td><td>REV</td></tr> <tr> <td>D</td><td>CS</td><td>M7473-0 -10</td><td>A</td></tr> </table>		SIZE	CODE	NUMBER	REV	D	CS	M7473-0 -10	A	SHEET 1 OF 1 NEXT HIGHER ASSEMBLY:	CHECK'D: <i>F. Sullivan</i> DATE: 8-19-86	DATE: 8-12-86
SIZE	CODE	NUMBER	REV										
D	CS	M7473-0 -10	A										

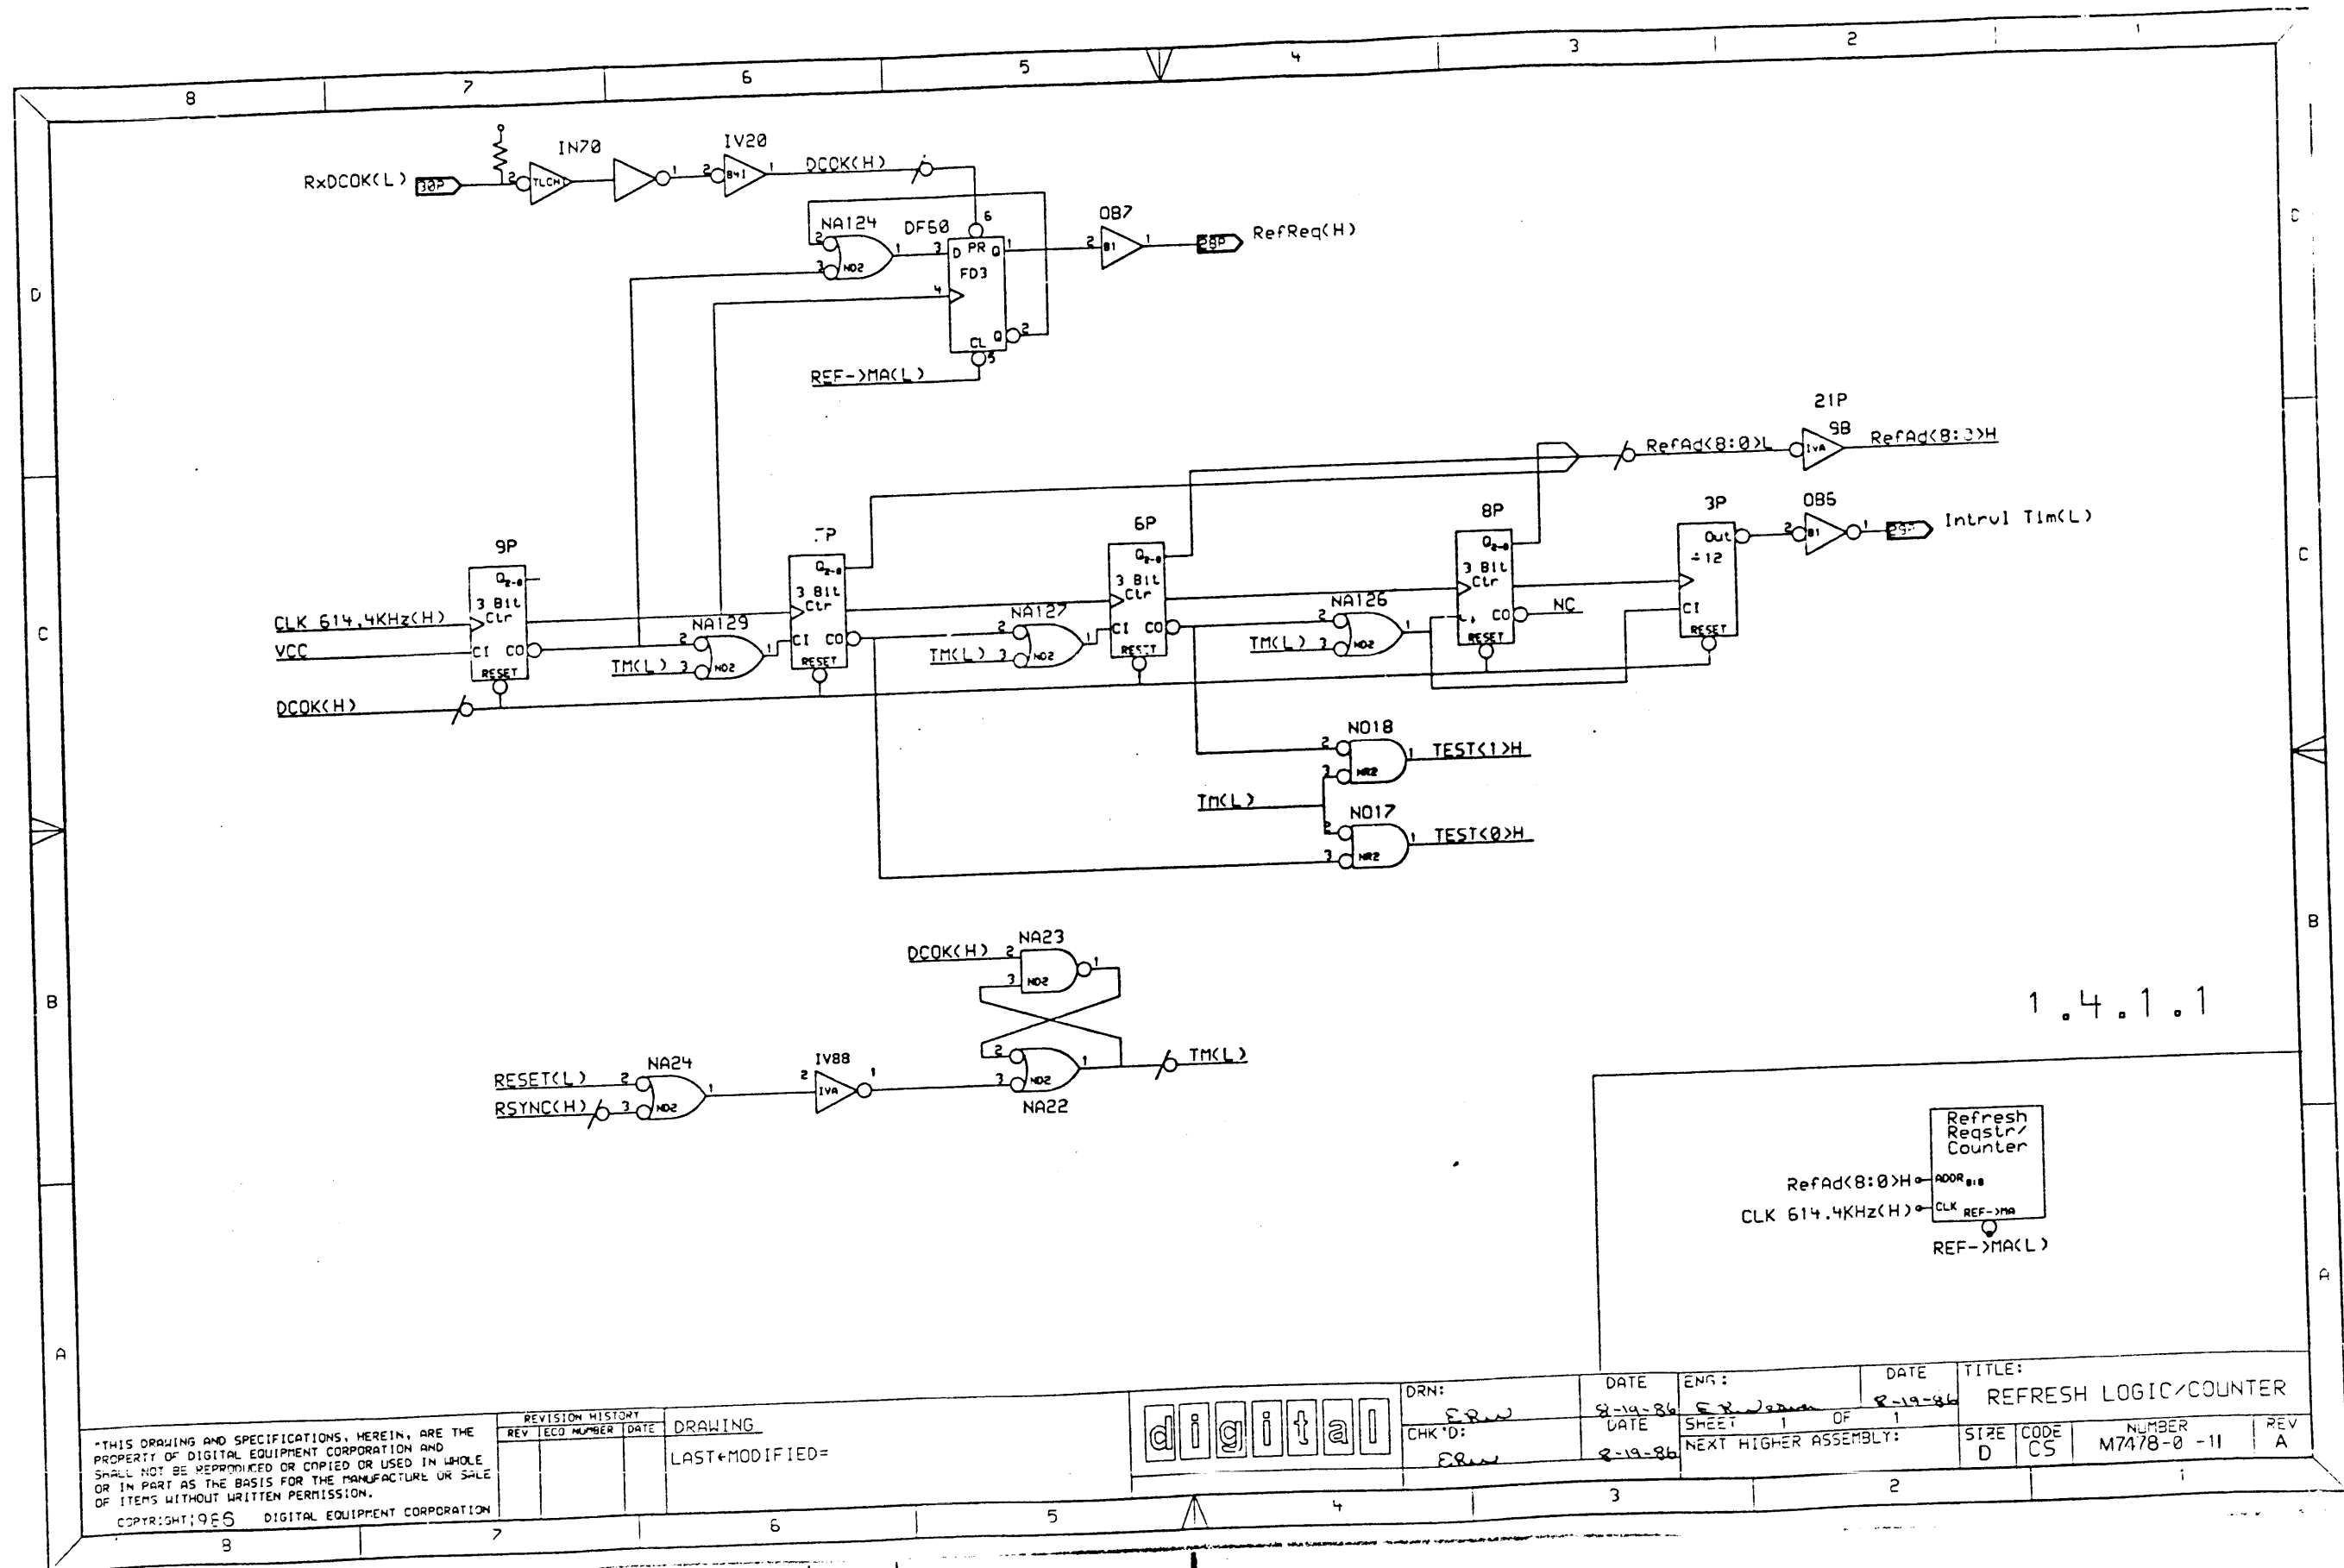

1.4.1.1

*THIS DRAWING AND SPECIFICATIONS, HEREIN, ARE THE PROPERTY OF DIGITAL EQUIPMENT CORPORATION AND SHALL NOT BE REPRODUCED OR COPIED OR USED IN WHOLE OR IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION.

REVISION HISTORY		
REV	ECO NUMBER	DATE


DRAWING
LAST MODIFIED=

digital


DRN: ERW
CHK'D: ERW

DATE	ENG:	DATE
8-19-86	ERW	8-19-86
DATE	SHEET	OF
8-19-86	1	1
NEXT HIGHER ASSEMBLY:		


TITLE: REFRESH LOGIC/COUNTER			
SIZE	CODE	NUMBER	REV
D	CS	M7478-0-11	A

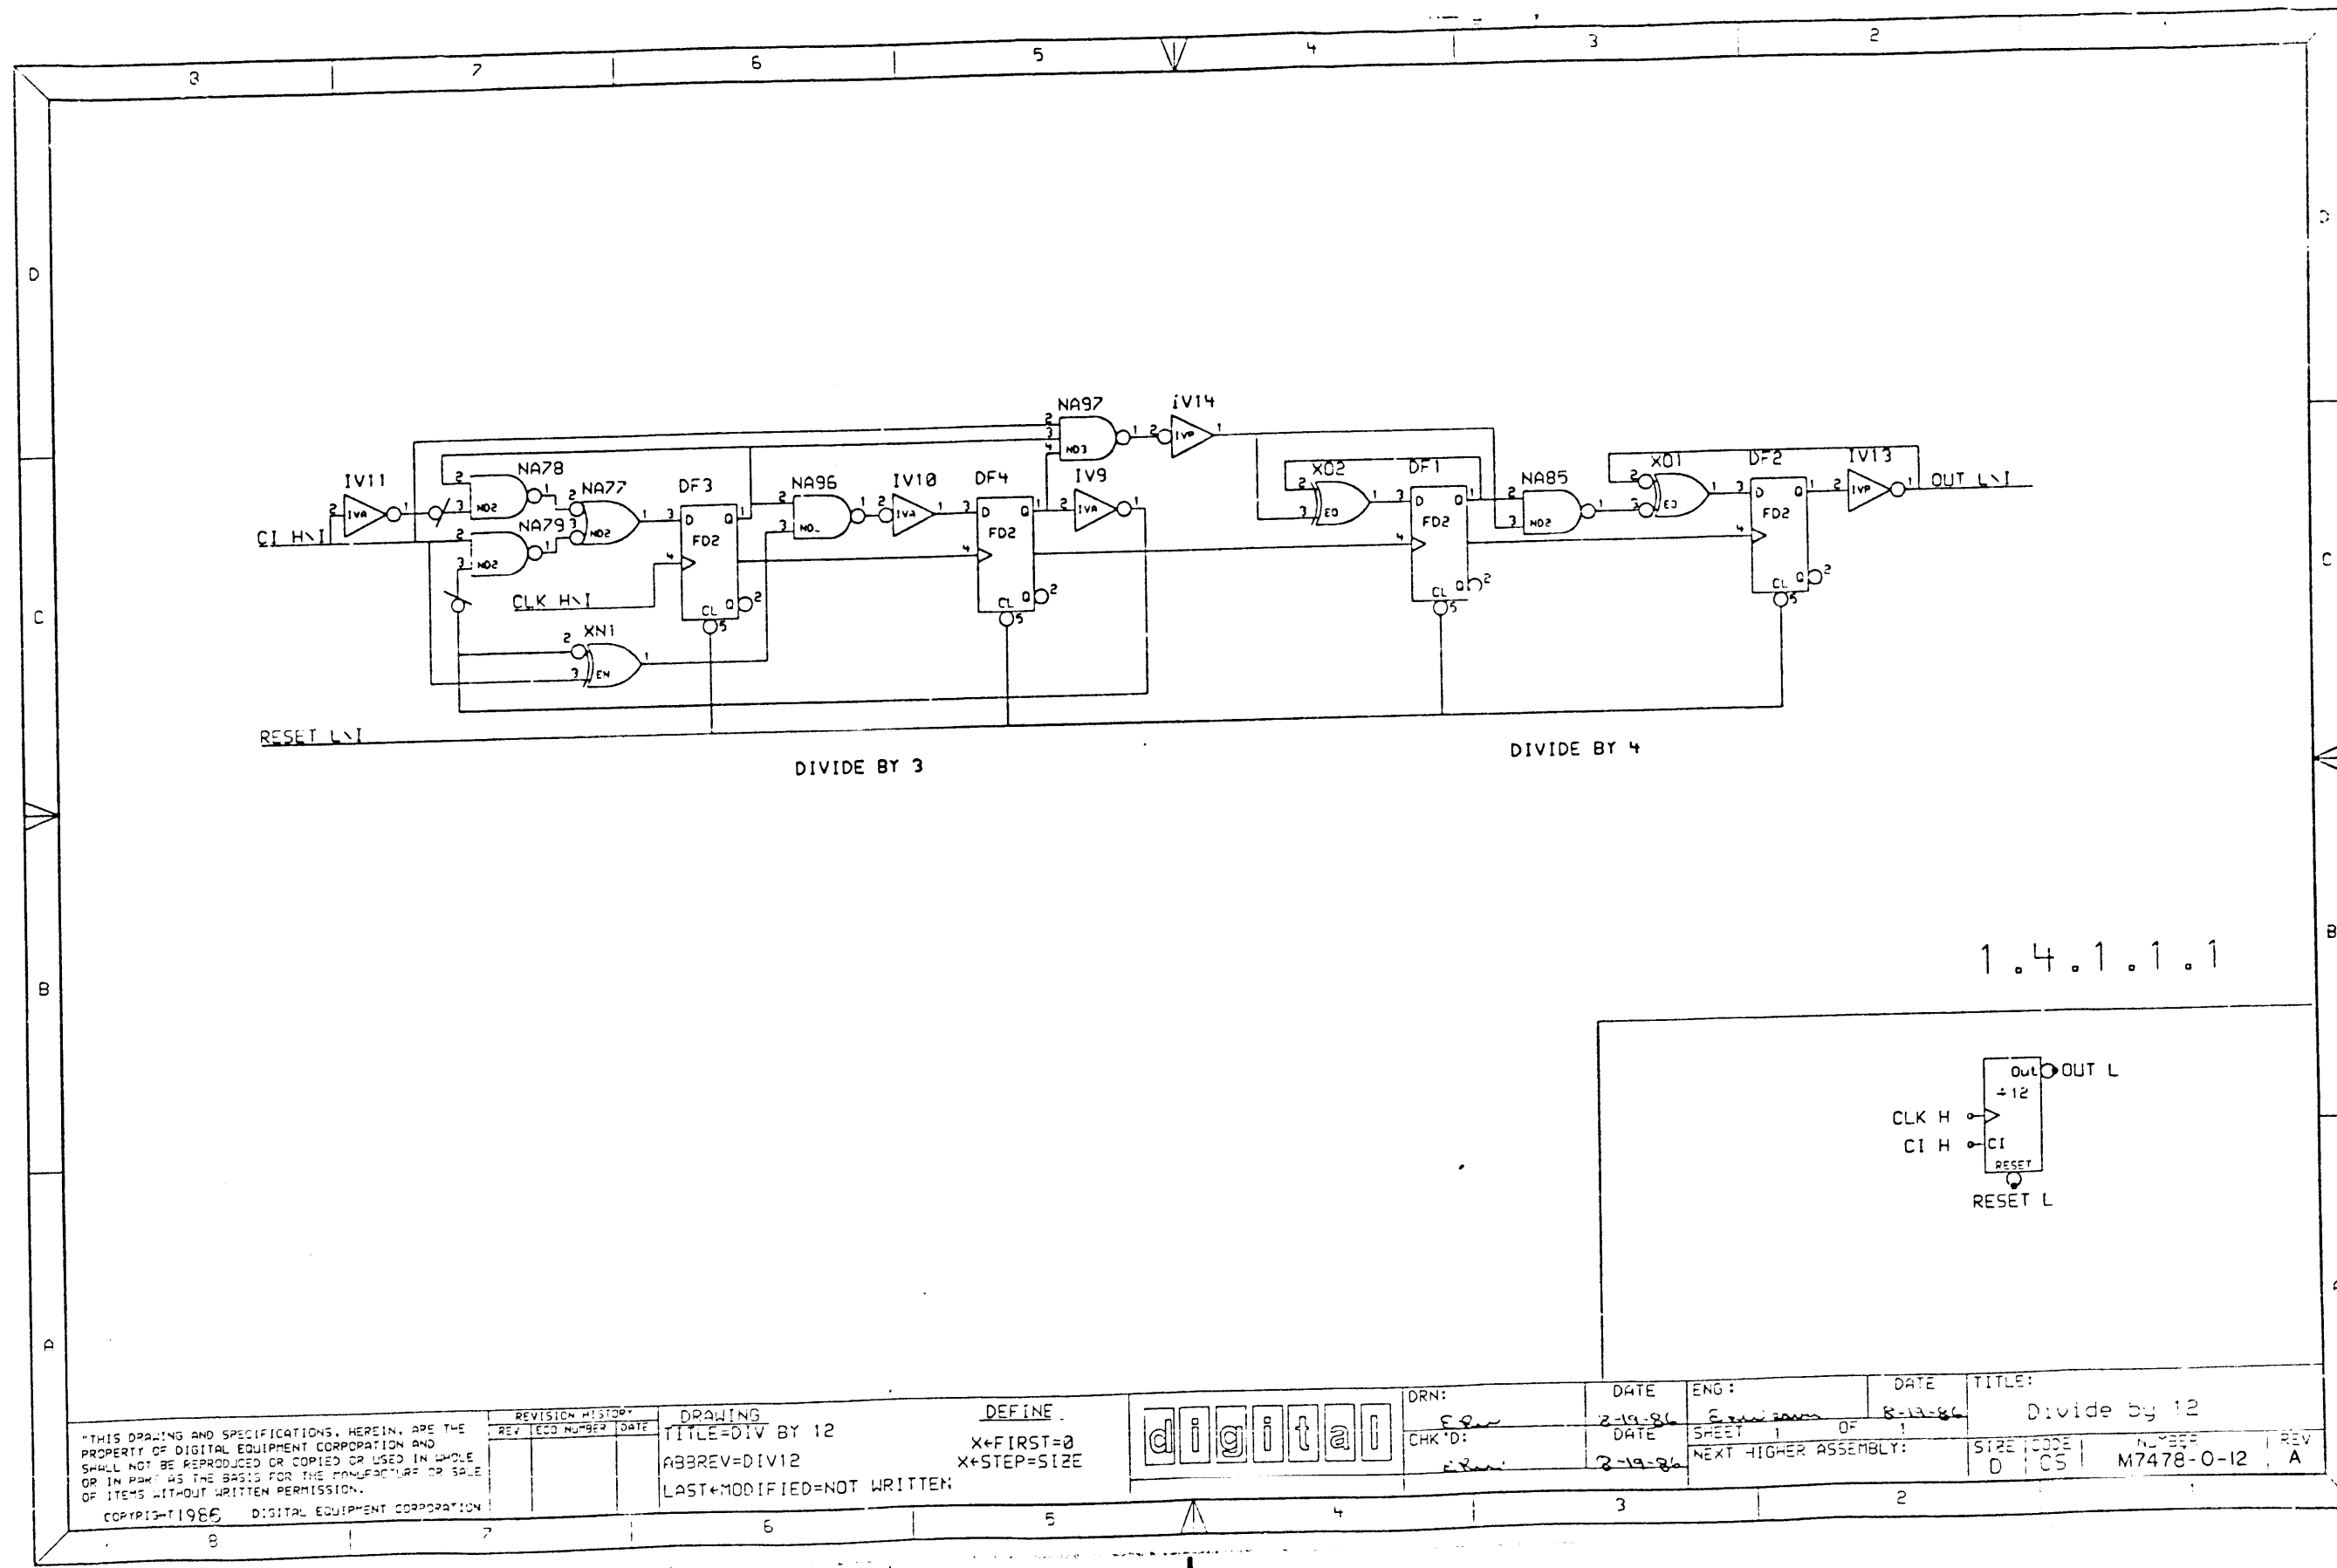


1.4.1.1.1

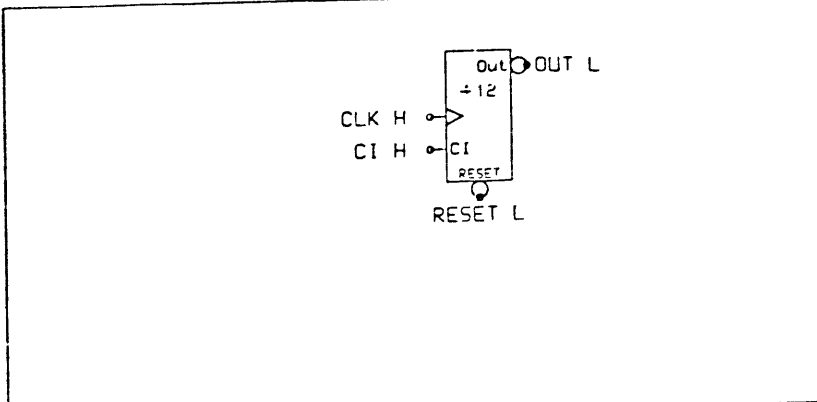

THIS DRAWING AND SPECIFICATIONS, HEREIN, ARE THE PROPERTY OF DIGITAL EQUIPMENT CORPORATION AND SHALL NOT BE REPRODUCED OR COPIED OR USED IN WHOLE OR IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION. COPYRIGHT © 1986 DIGITAL EQUIPMENT CORPORATION	REVISION HISTORY REV. ECD NUMBER DATE	DRAWING TITLE=DIV BY 12 ABBREV=DIV12 LAST+MODIFIED=NOT WRITTEN	DEFINE X+FIRST=0 X+STEP=SIZE	digital	DRN: <i>Edw</i>	DATE 2-19-86	ENG: <i>Edw</i>	DATE 8-13-86	TITLE: Divide by 12
					CHK'D: <i>Edw</i>	DATE 2-19-86	SHEET 1 OF 1	NEXT HIGHER ASSEMBLY:	SIZE CODE NUMBER REV 0 CS M7478-0-12 A

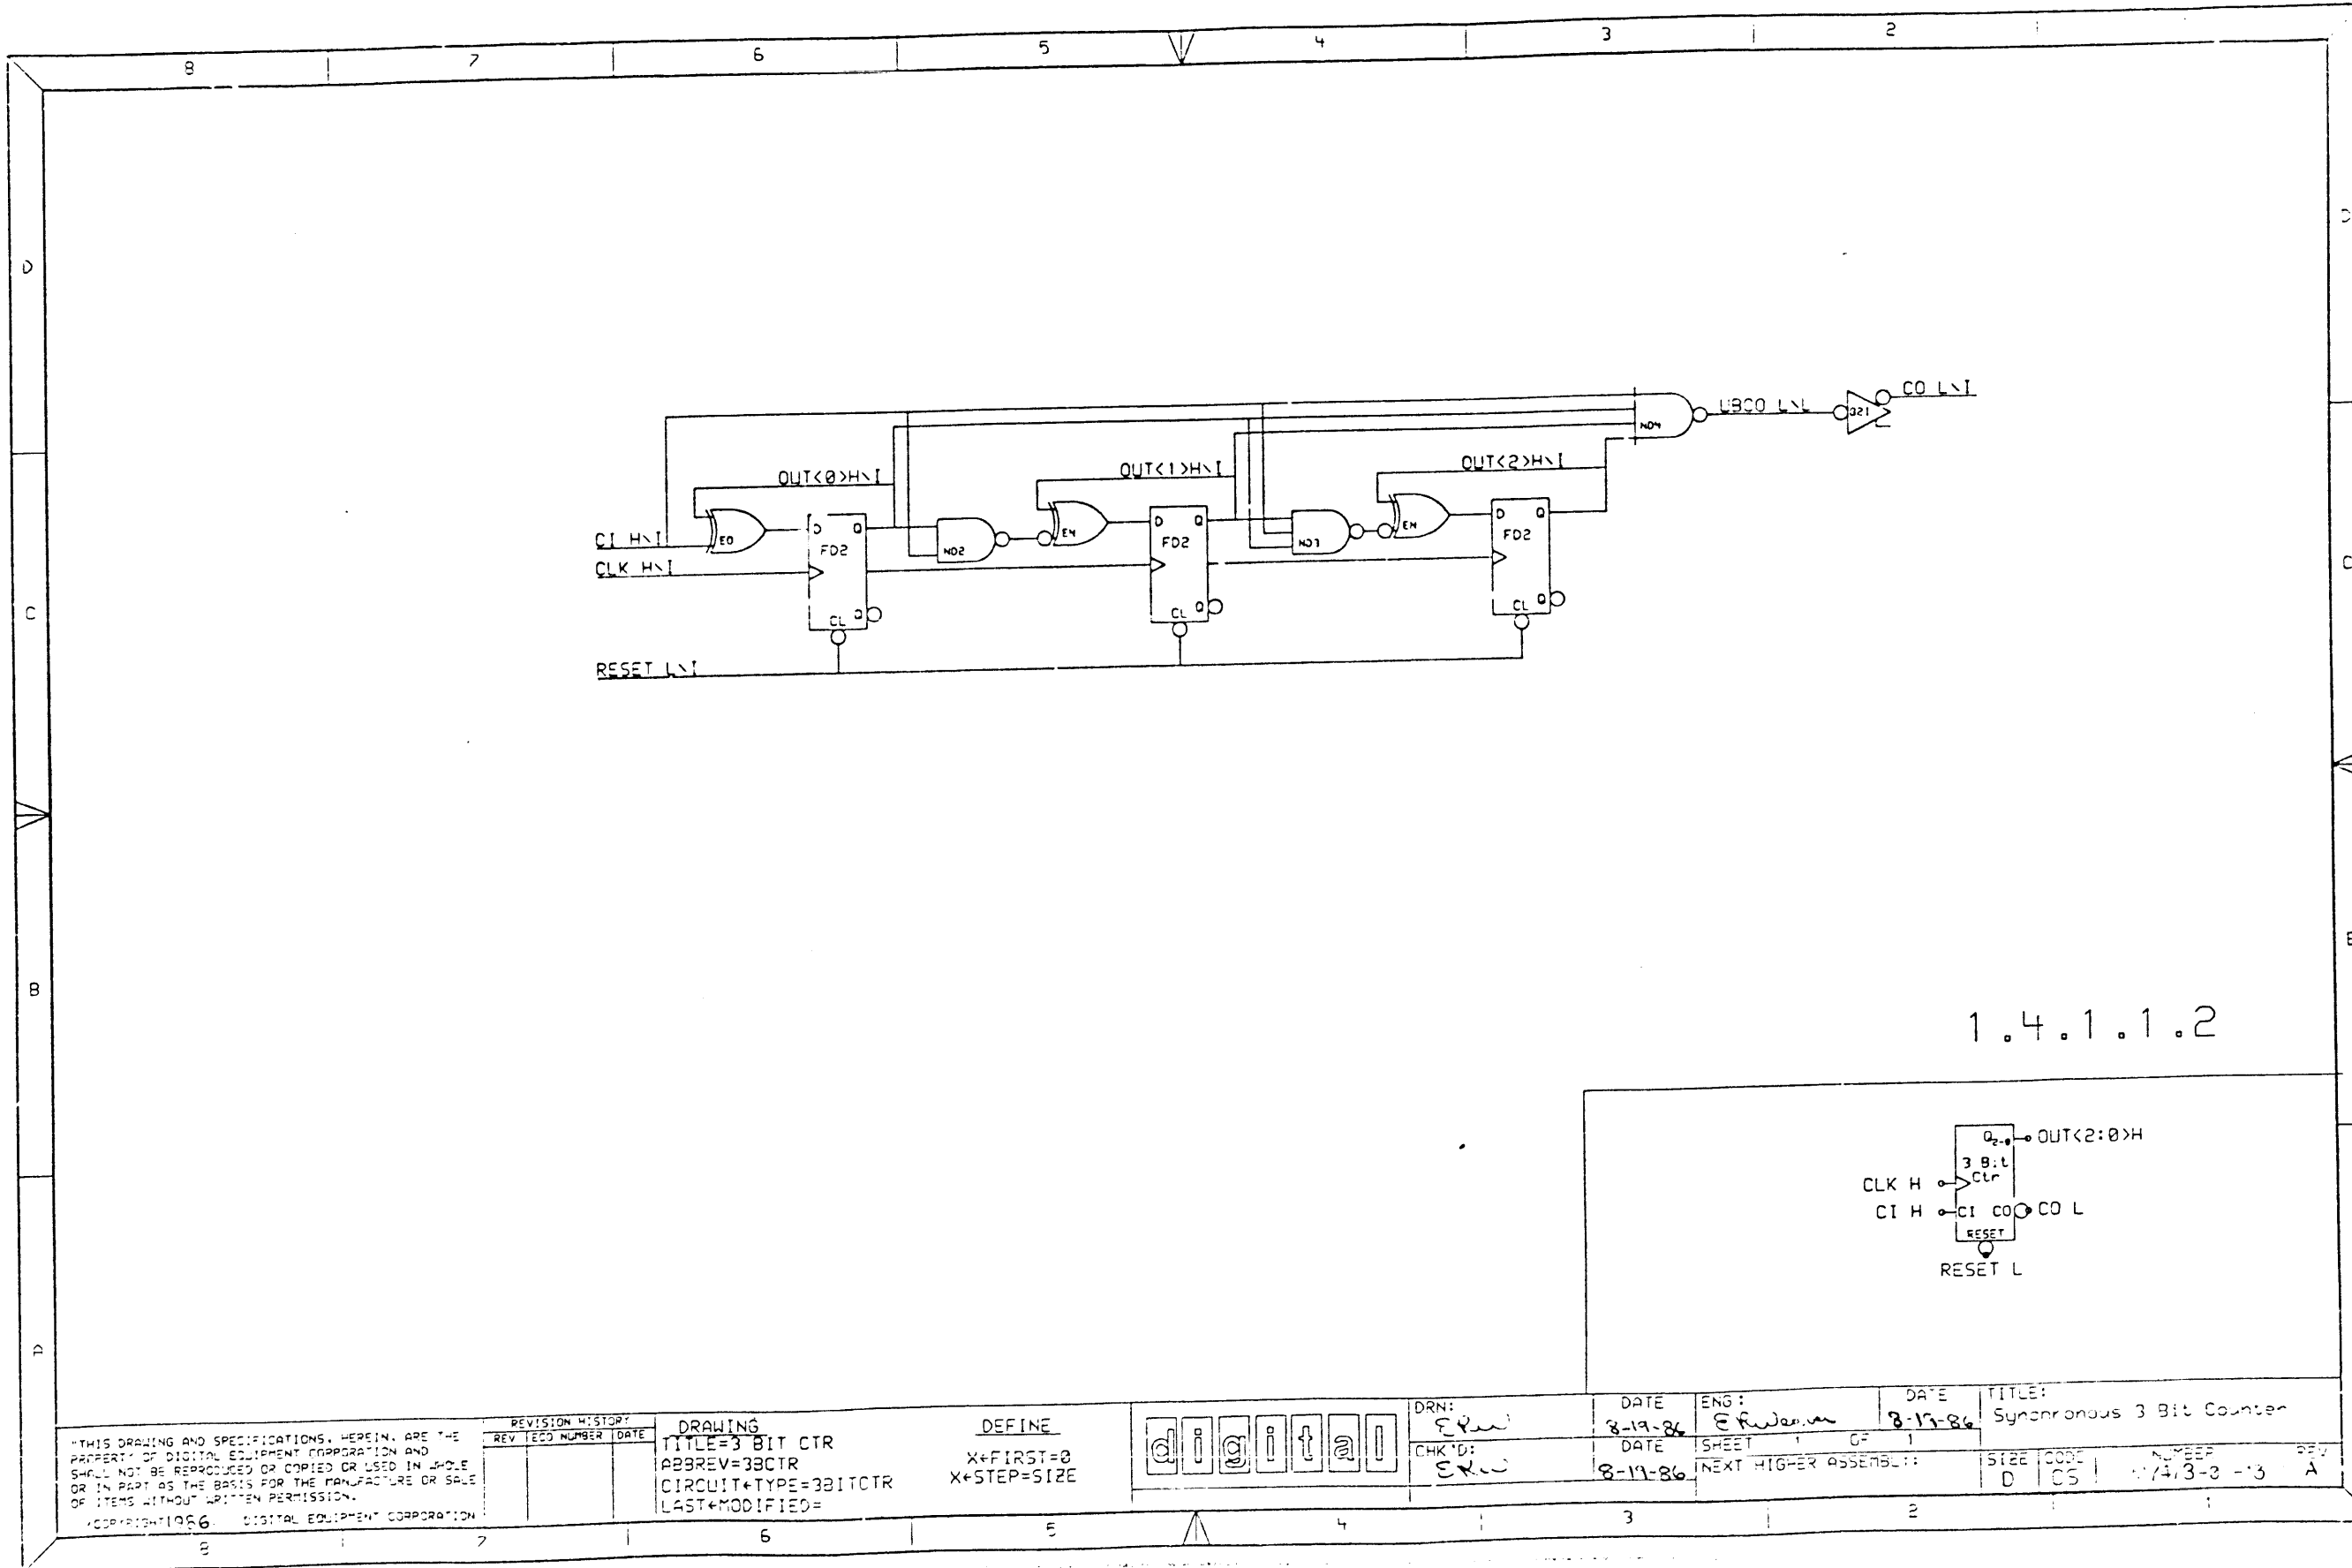

1.4.1.1.2

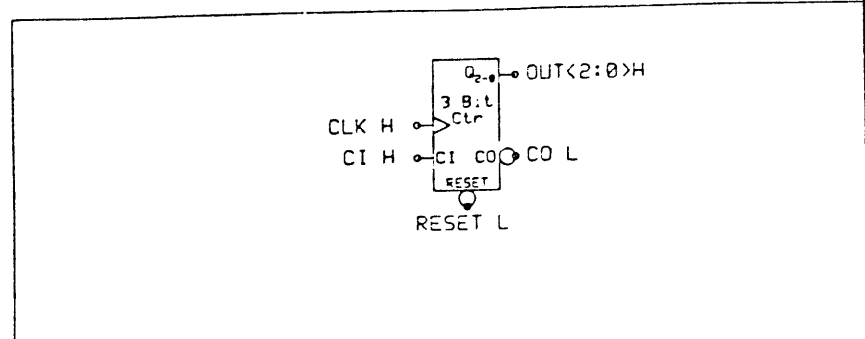

THIS DRAWING AND SPECIFICATIONS, HEREIN, ARE THE PROPERTY OF DIGITAL EQUIPMENT CORPORATION AND SHALL NOT BE REPRODUCED OR COPIED OR USED IN WHOLE OR IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION.
 COPYRIGHT 1966 DIGITAL EQUIPMENT CORPORATION

REVISION HISTORY		
REV	TECO NUMBER	DATE

DRAWING
 TITLE=3 BIT CTR
 ABBREV=38CTR
 CIRCUIT+TYPE=3BITCTR
 LAST+MODIFIED=

DEFINE
 X+FIRST=0
 X+STEP=SIZE

digital


DRN:
 EFW
 CHK'D:
 ERW

DATE
 8-19-86
 DATE
 8-19-86


ENG:
 EFW
 SHEET 1 OF 1
 NEXT HIGHER ASSEMBLY:

DATE
 8-19-86

TITLE:
 Synchronous 3 Bit Counter
 SIZE CODE NUMBER REV
 D 05 1743-3-3 A

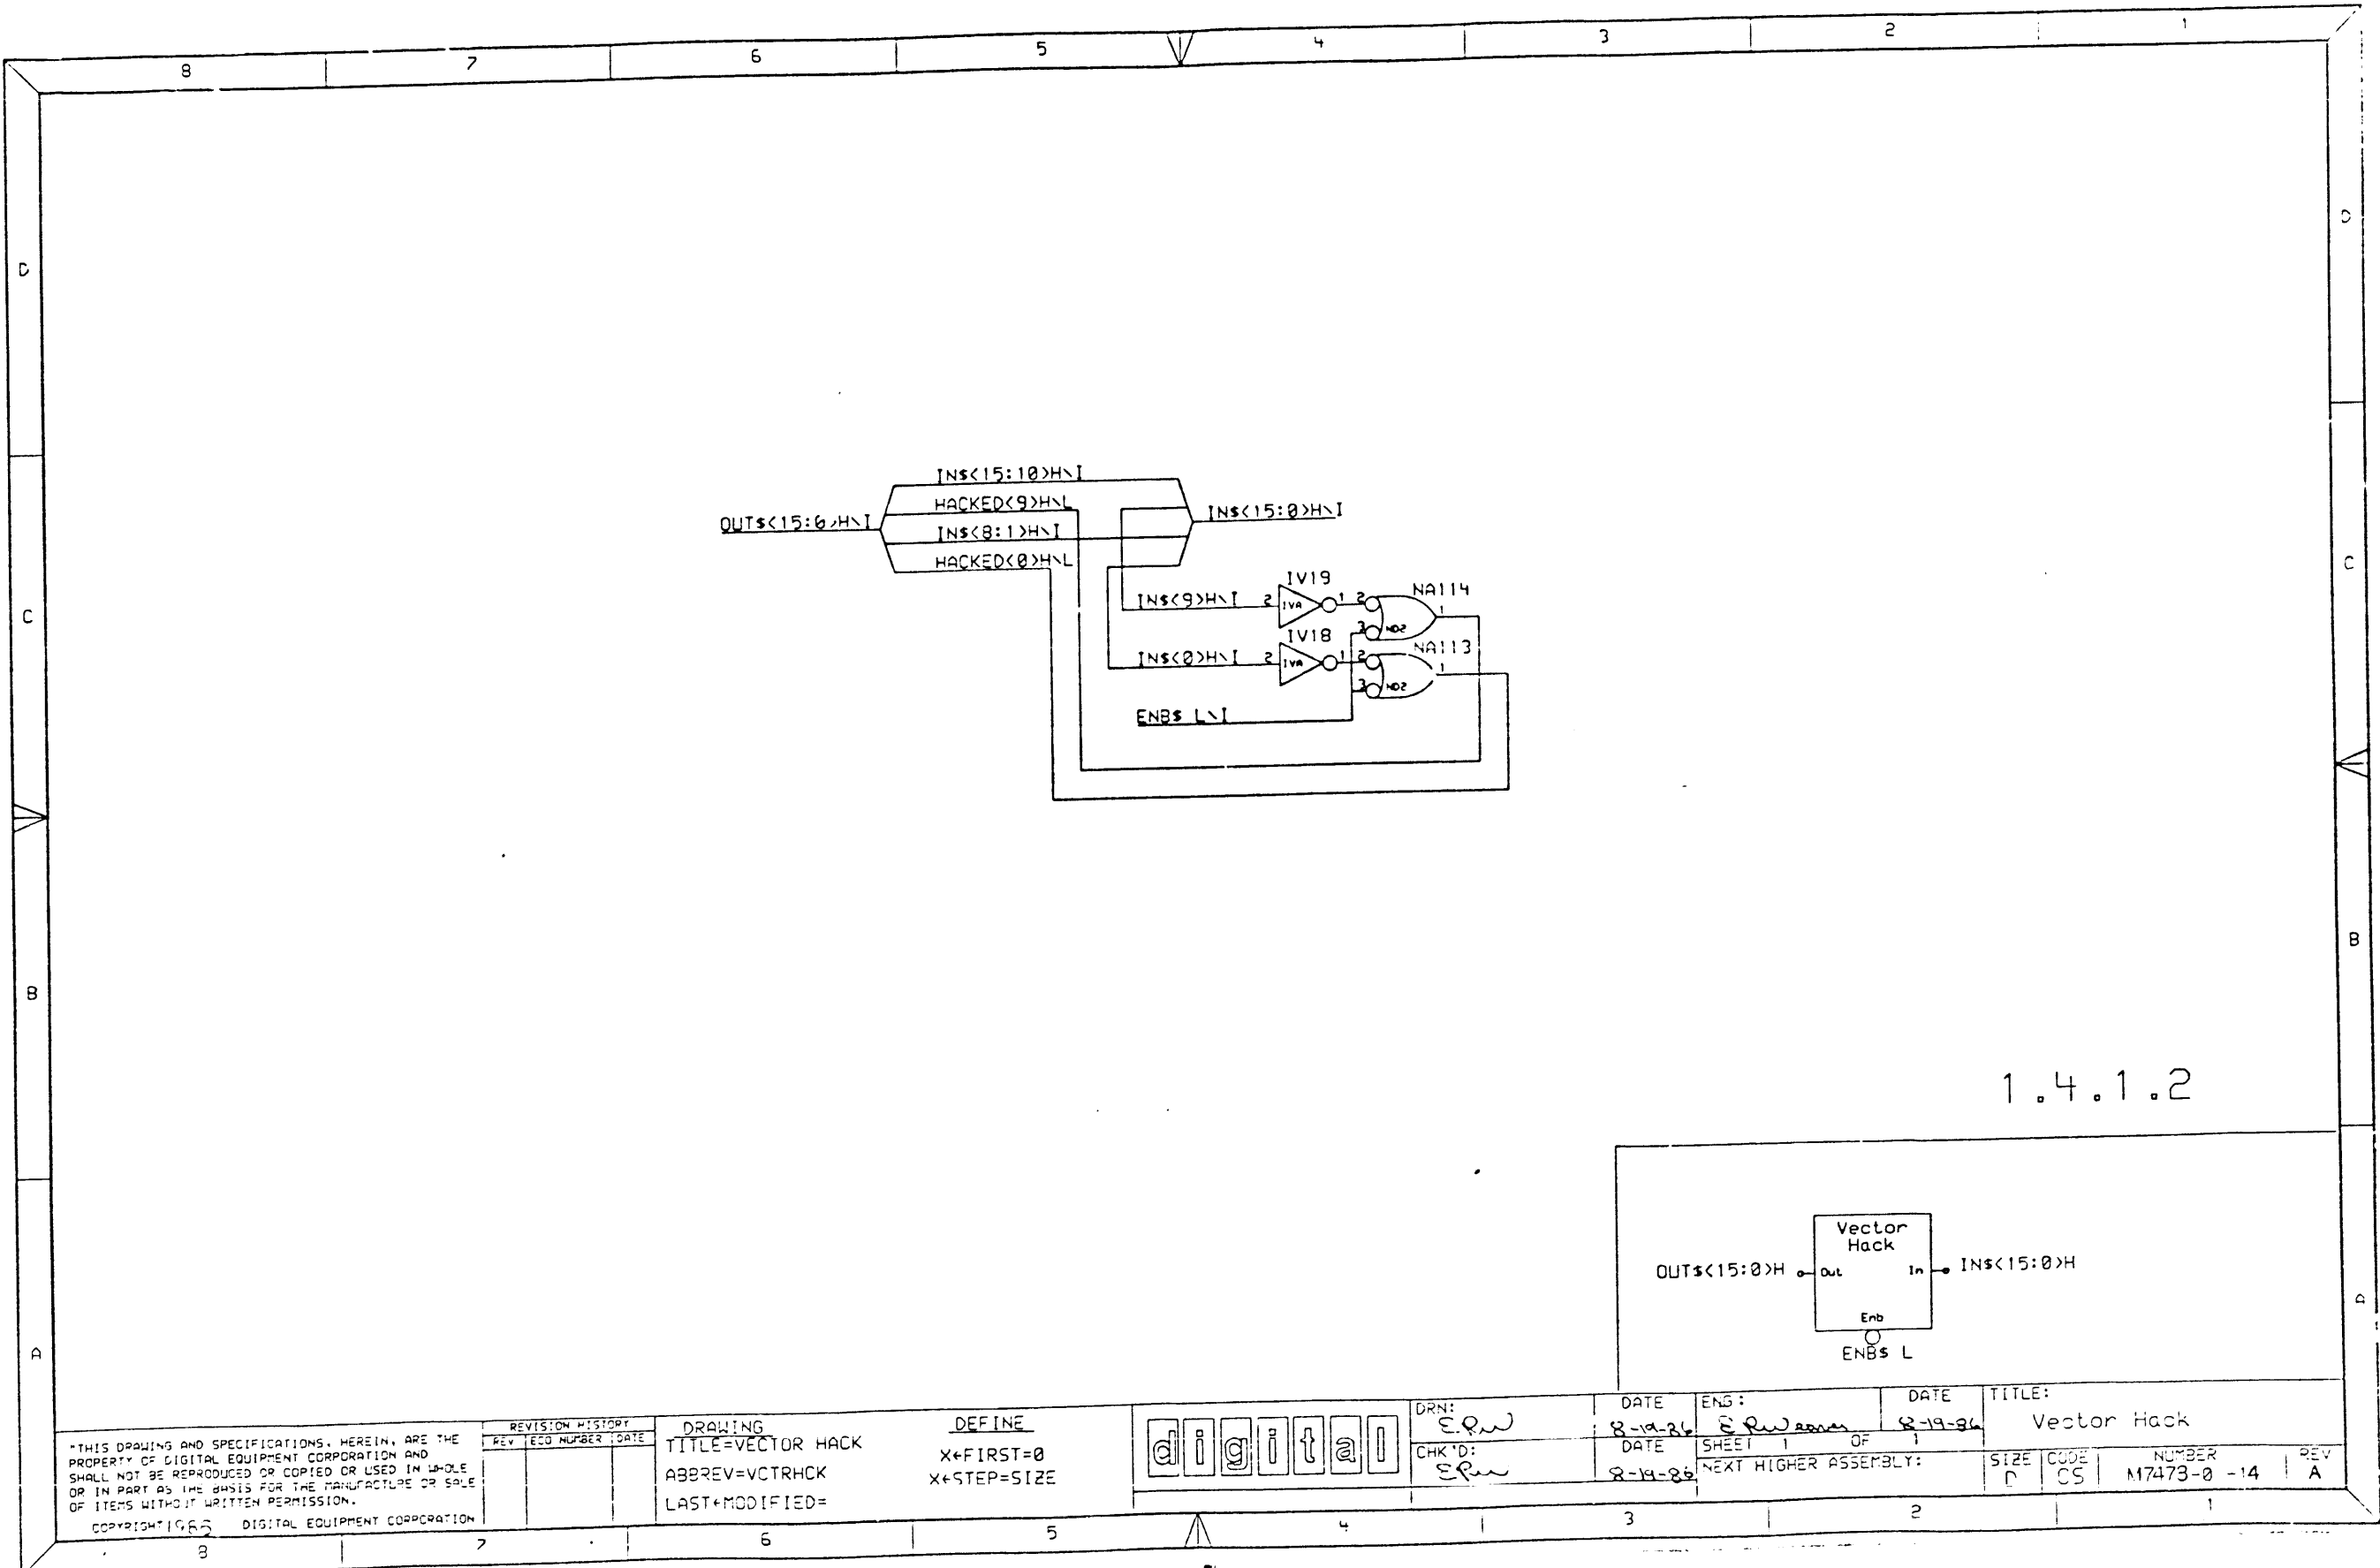

1.4.1.2

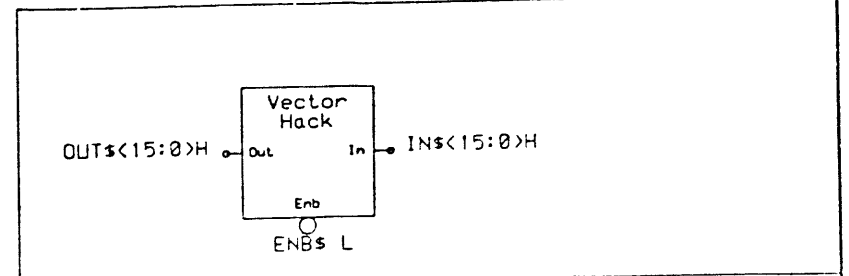

*THIS DRAWING AND SPECIFICATIONS, HEREIN, ARE THE PROPERTY OF DIGITAL EQUIPMENT CORPORATION AND SHALL NOT BE REPRODUCED OR COPIED OR USED IN WHOLE OR IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION.
 COPYRIGHT 1965 DIGITAL EQUIPMENT CORPORATION

REVISION HISTORY		
REV	ECO NUMBER	DATE

DRAWING
 TITLE=VECTOR HACK
 ABBREV=VCTRCK
 LAST+MODIFIED=

DEFINE
 X+FIRST=0
 X+STEP=SIZE



DRN: *ERW*
 CHK'D: *ERW*


DATE: *8-19-86*
 DATE: *8-19-86*

ENG: *E. R. Warner*
 SHEET 1 OF 1


DATE: *8-19-86*

TITLE: Vector Hack

SIZE: D
 CODE: CS
 NUMBER: M7473-0 -14
 REV: A

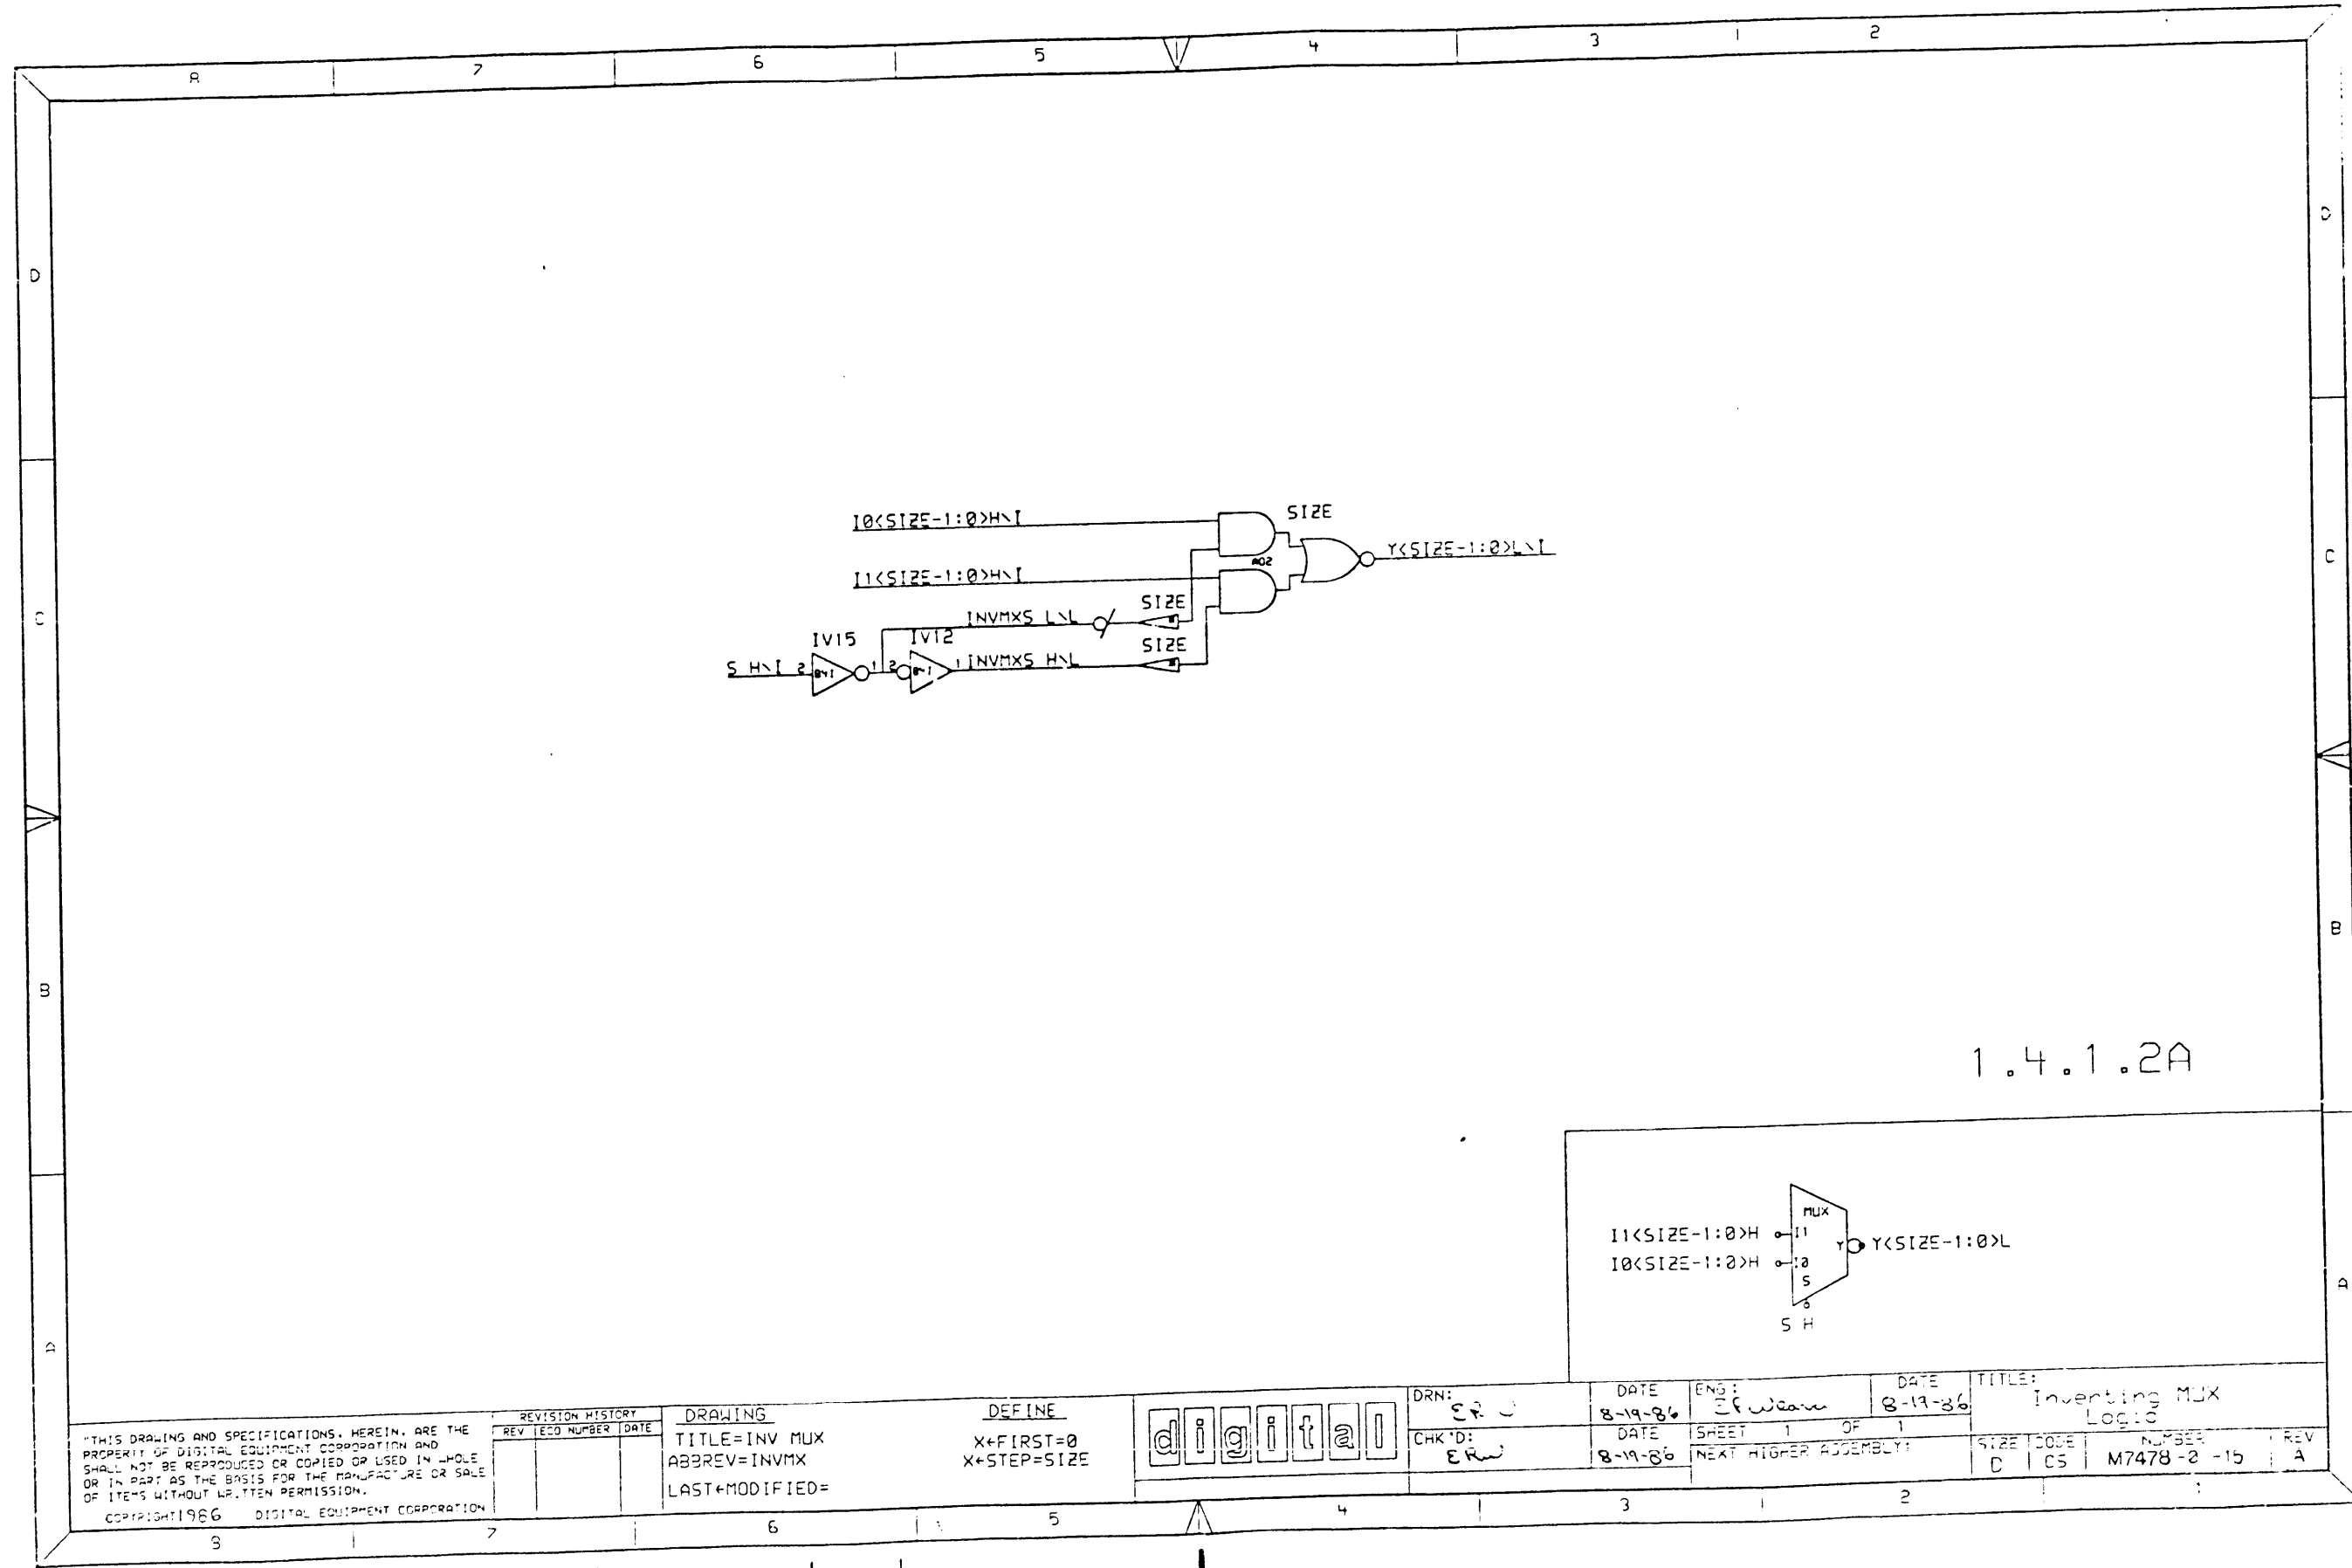

1.4.1.2A

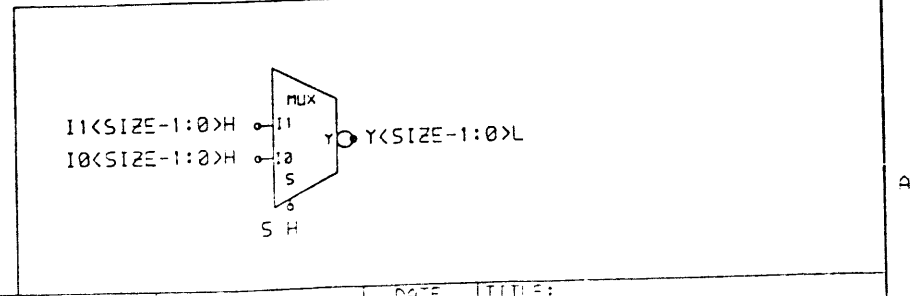

THIS DRAWING AND SPECIFICATIONS, HEREIN, ARE THE PROPERTY OF DIGITAL EQUIPMENT CORPORATION AND SHALL NOT BE REPRODUCED OR COPIED OR USED IN WHOLE OR IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION.
 COPYRIGHT 1966 DIGITAL EQUIPMENT CORPORATION

REVISION HISTORY		
REV	EC'D NUMBER	DATE

DRAWING
 TITLE=INV MUX
 ABBREV=INVMX
 LAST*MODIFIED=

DEFINE
 X*FIRST=0
 X*STEP=SIZE


digital

DRN: ERJ
 CHK'D: ERW


DATE 8-19-86
 DATE 8-19-86

ENG: E. J. Wilson
 SHEET 1 OF 1
 NEXT HIGHER ASSEMBLY:

DATE 8-19-86
 TITLE: Inverting MUX Logic
 SIZE CODE D CS
 NUMBER M7478-2-15
 REV A

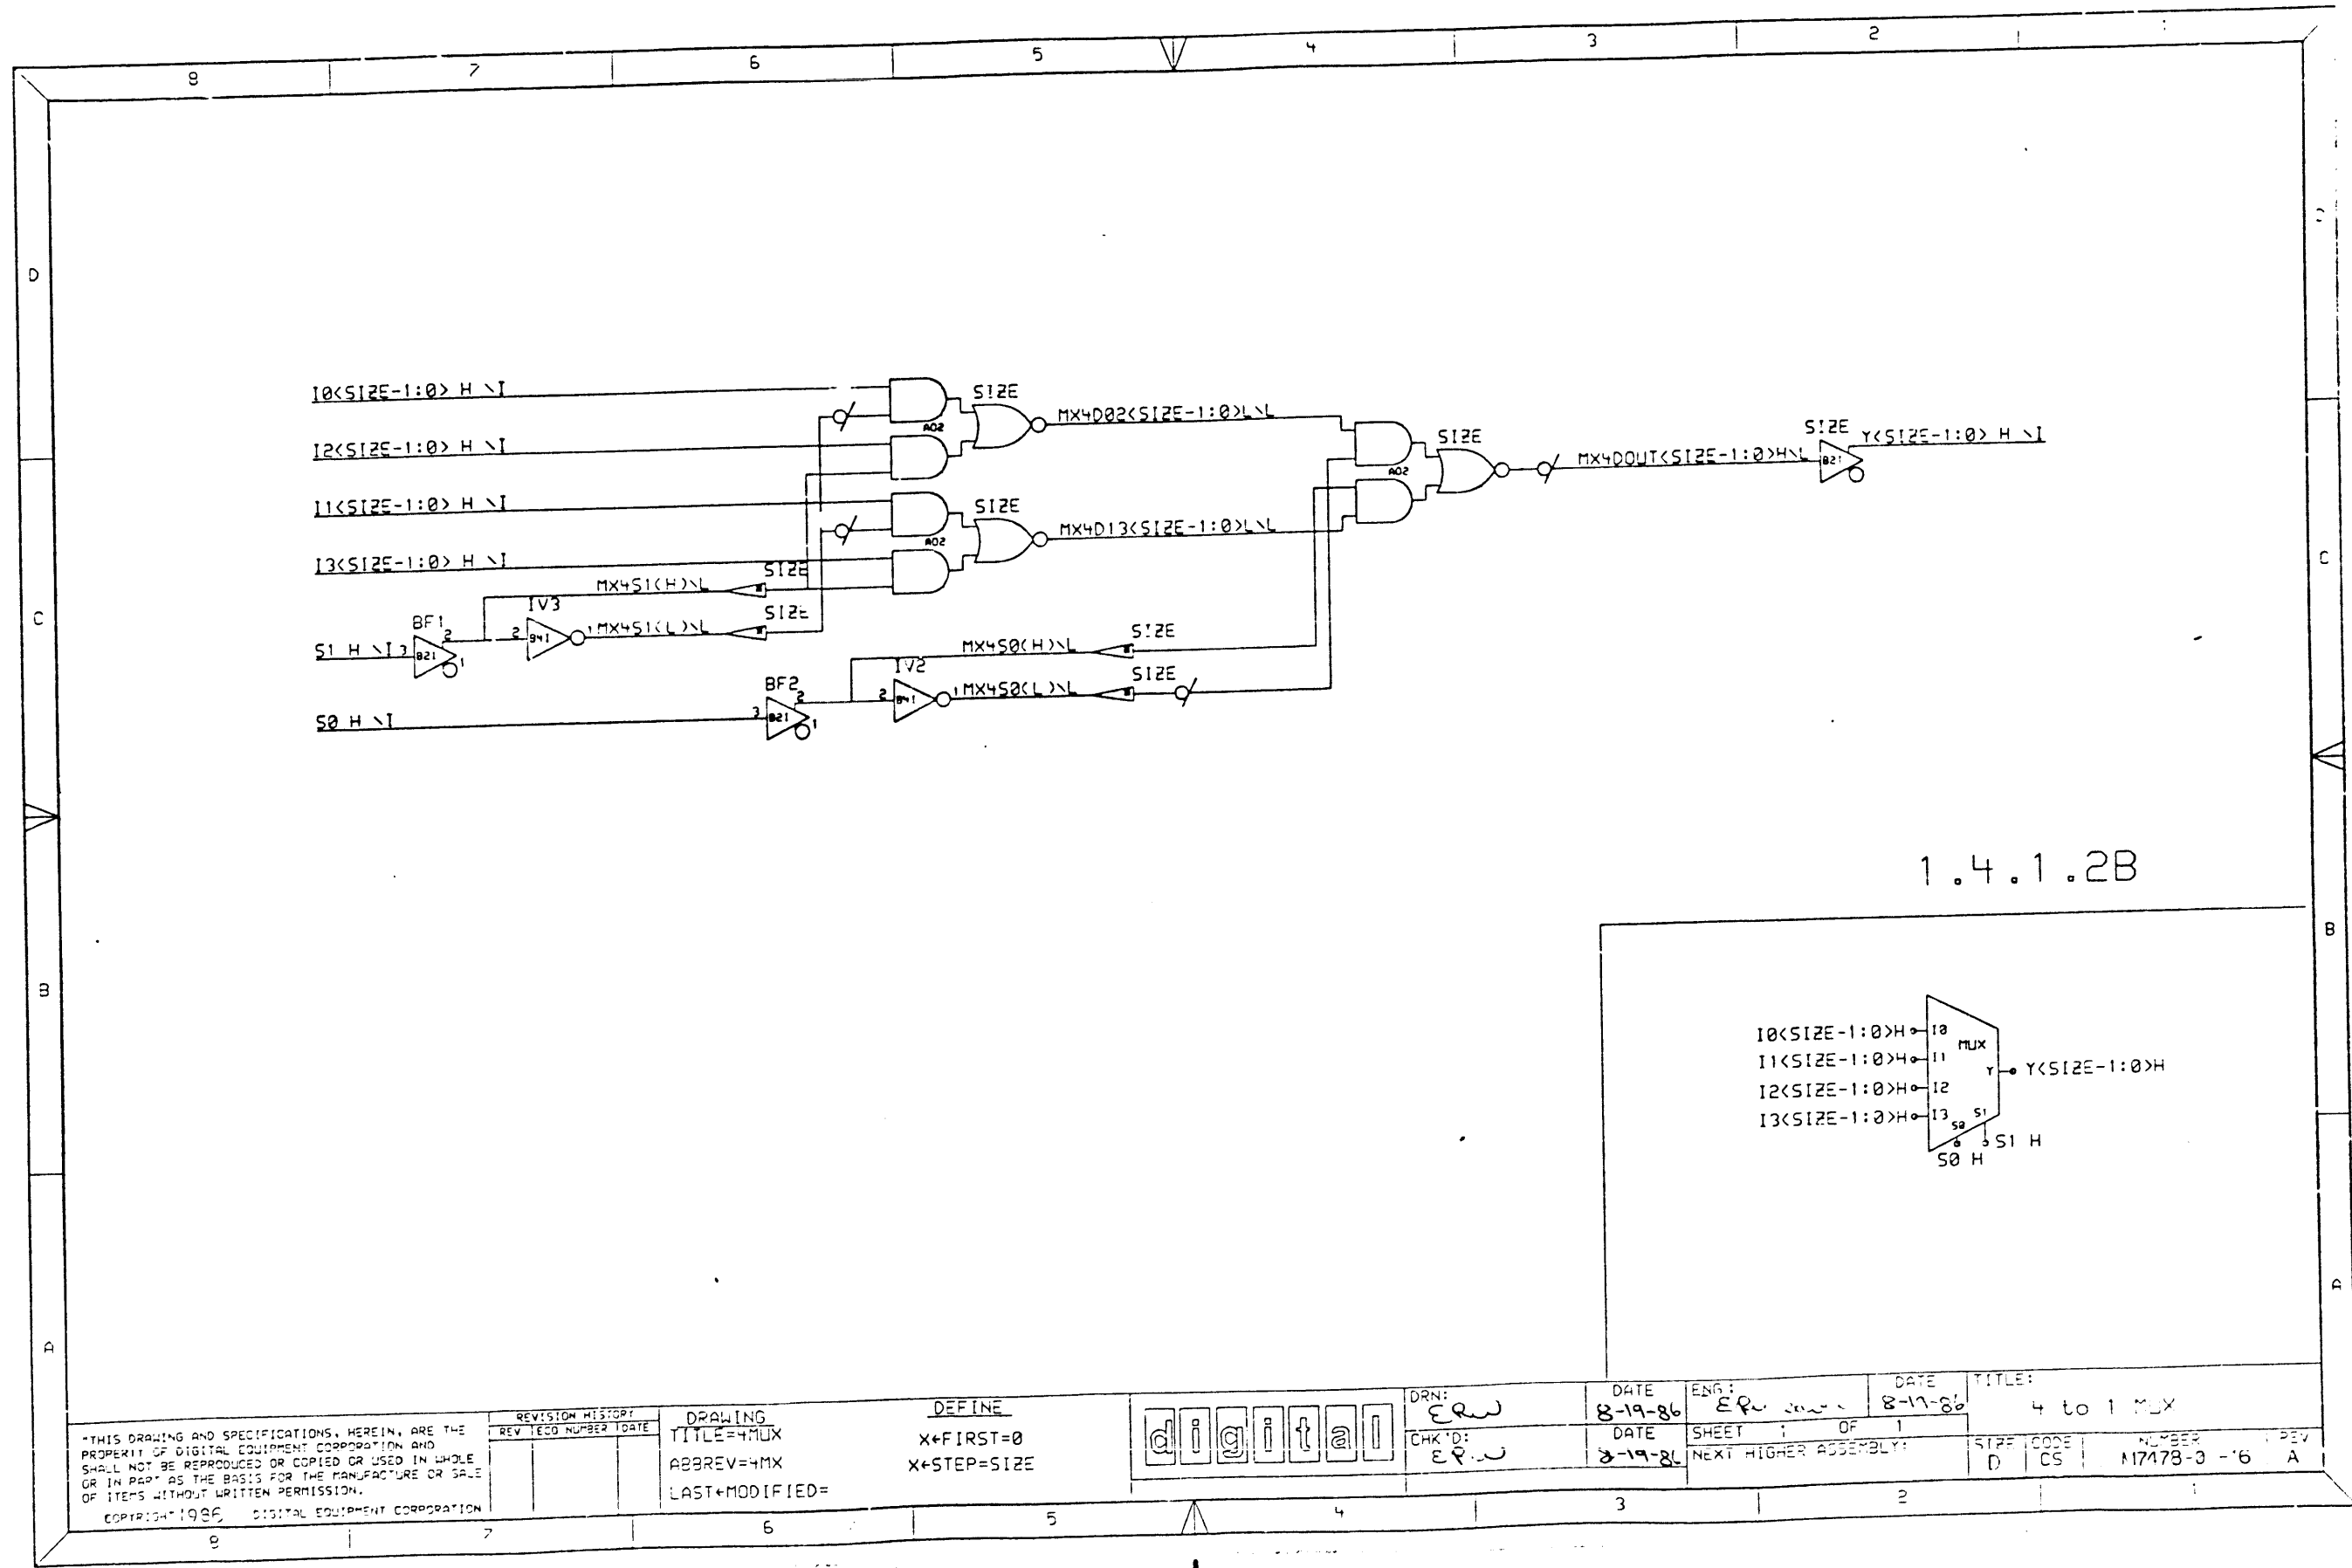


1.4.1.2B

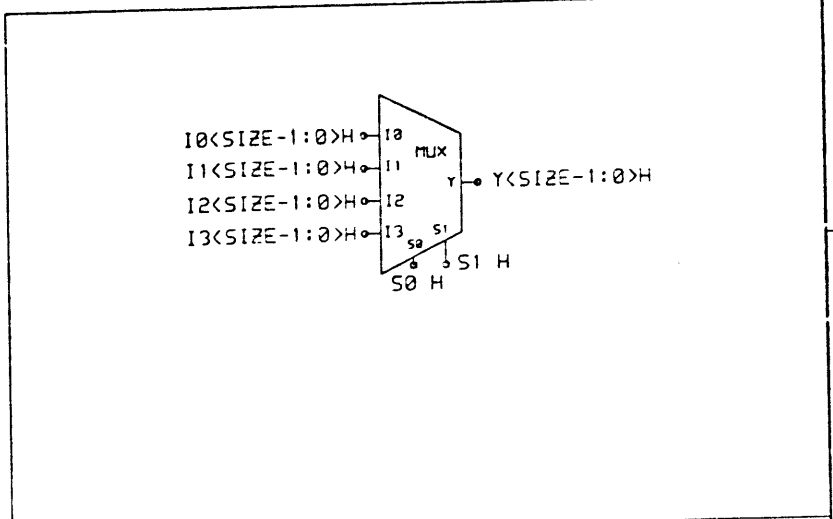


THIS DRAWING AND SPECIFICATIONS, HEREIN, ARE THE PROPERTY OF DIGITAL EQUIPMENT CORPORATION AND SHALL NOT BE REPRODUCED OR COPIED OR USED IN WHOLE OR IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION.
 COPYRIGHT 1986 DIGITAL EQUIPMENT CORPORATION

REVISION HISTORY		
REV	TECO NUMBER	DATE


DRAWING TITLE=4MUX
 ABBREV=4MX
 LAST+MODIFIED=
 DEFINE
 X+FIRST=0
 X+STEP=SIZE



DRN: ERW	DATE 8-19-86	ENG: ERW	DATE 8-17-86	TITLE: 4 to 1 MUX
CHK'D: ERW	DATE 8-19-86	SHEET 1	OF 1	SIZE CODE D CS
NEXT HIGHER ASSEMBLY:			NUMBER M7478-0 -'6	REV A

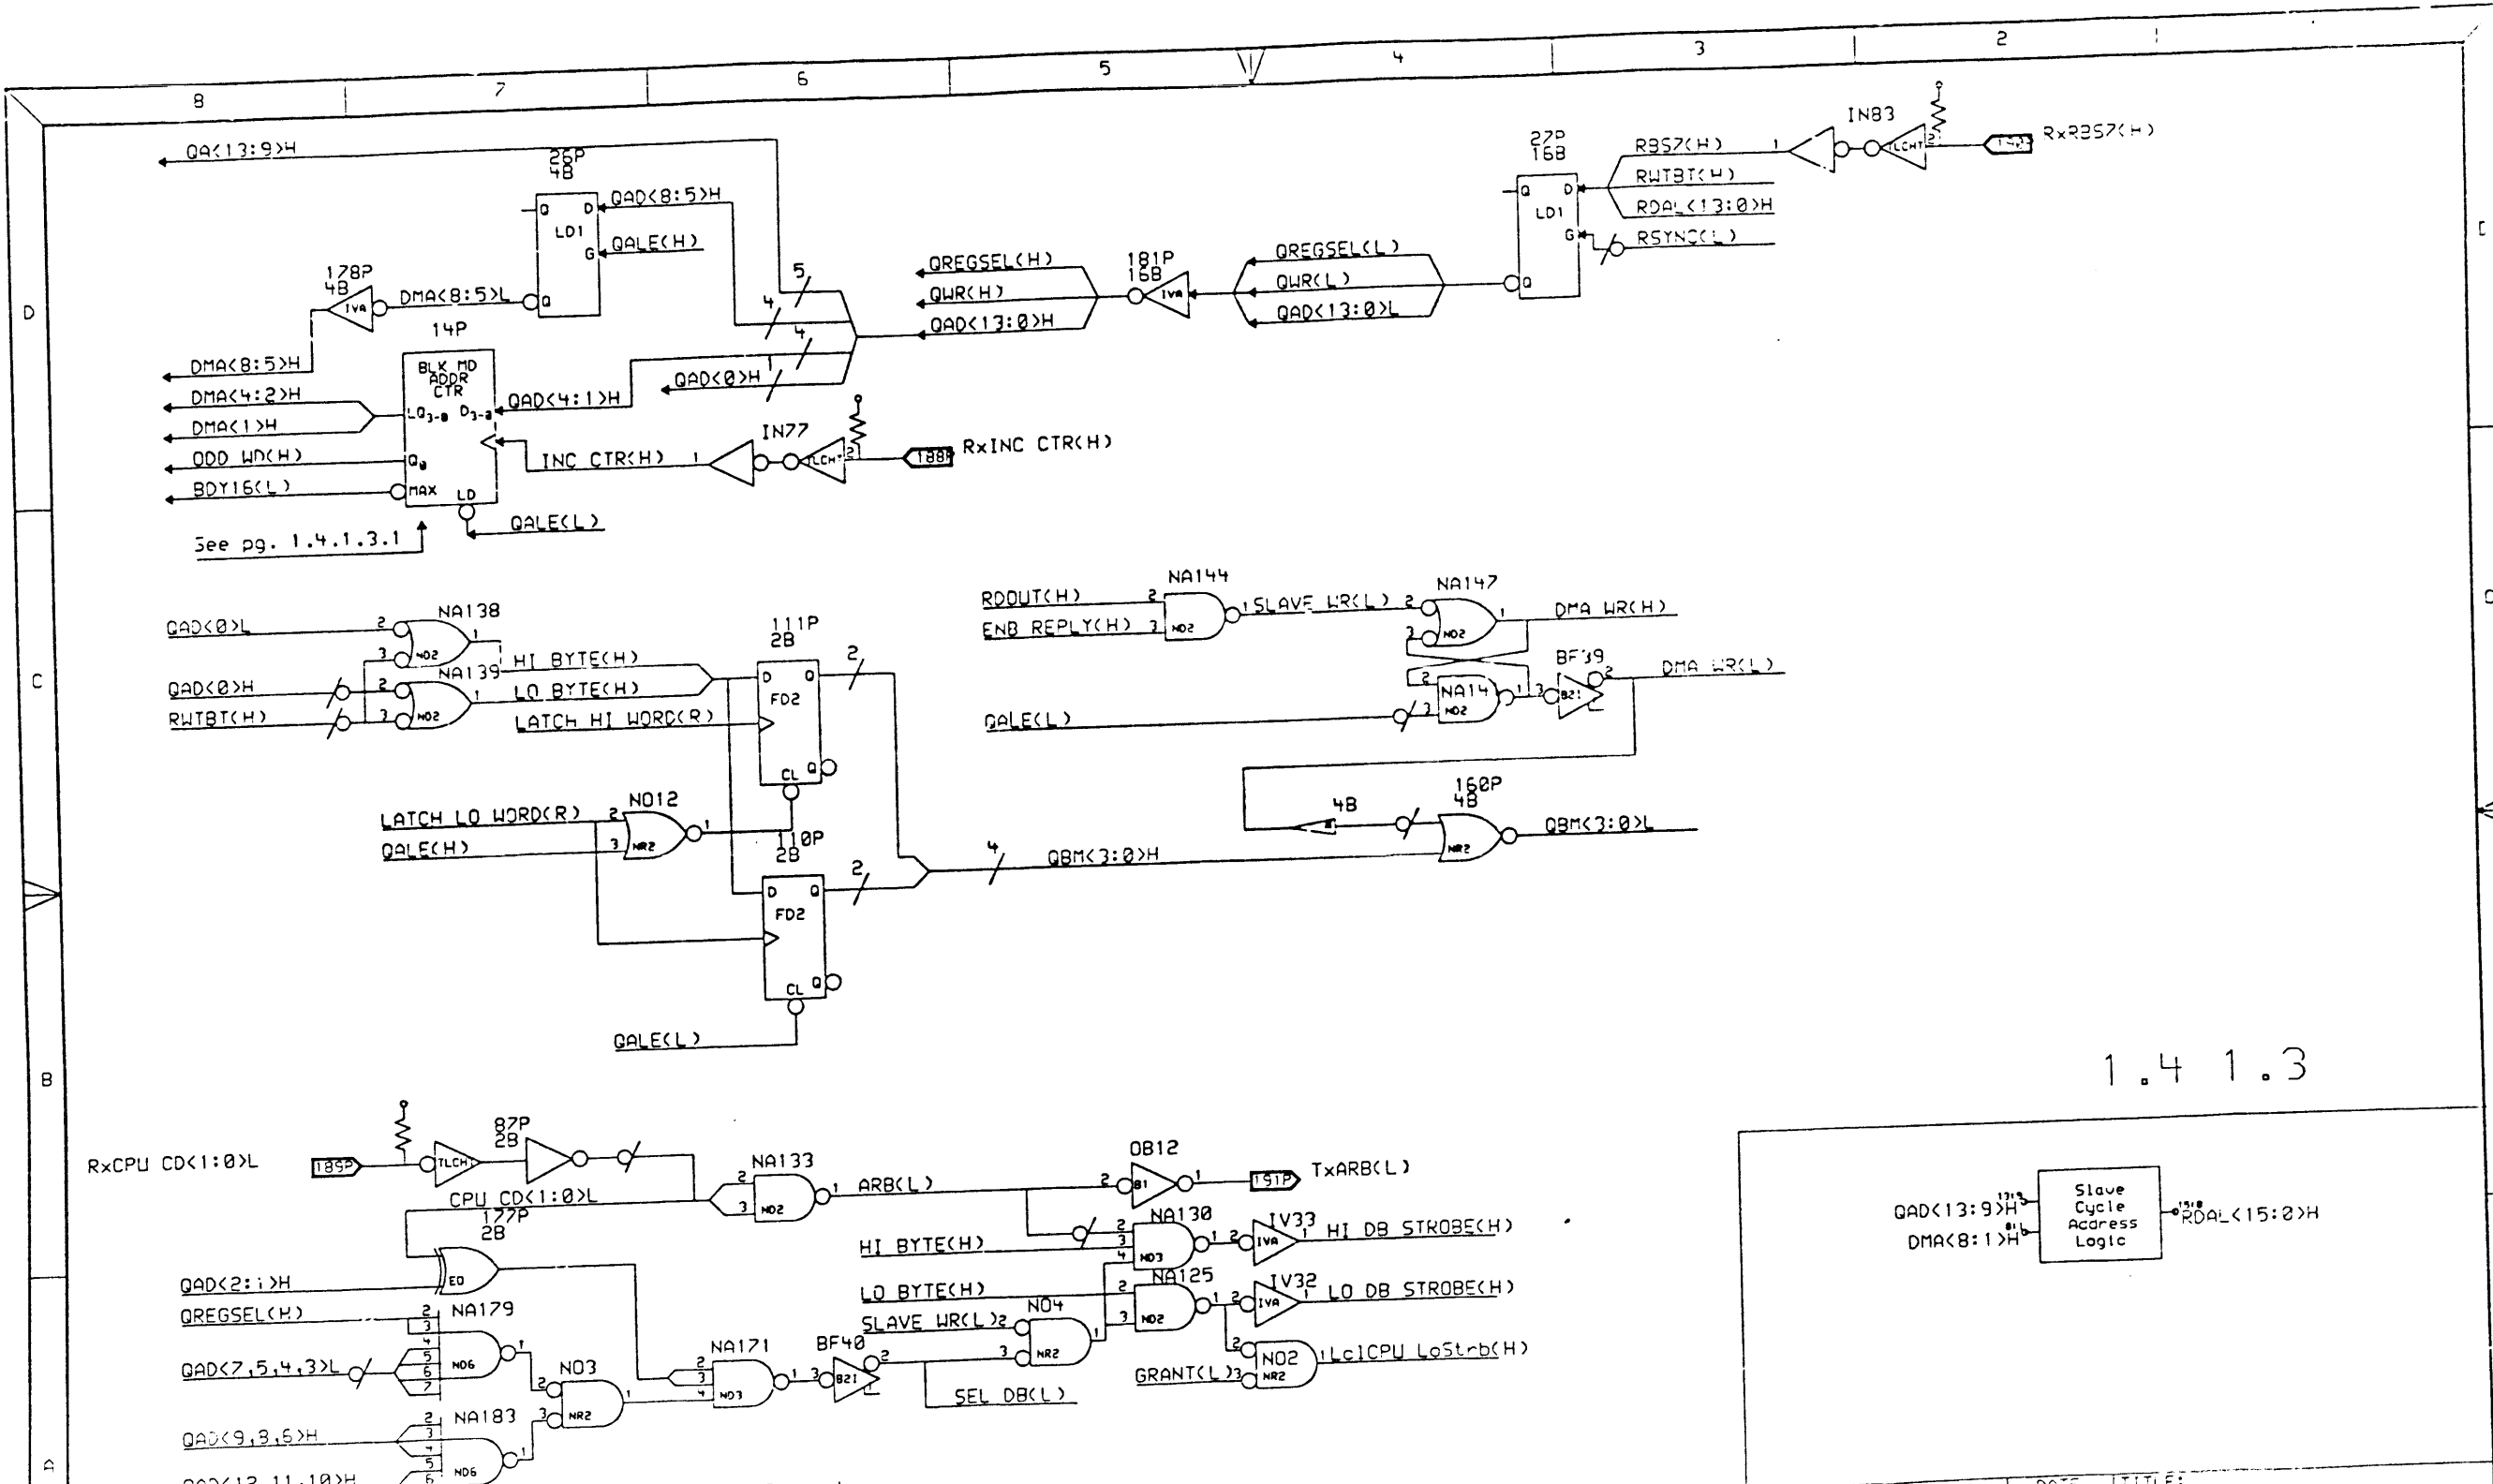

1.4 1.3

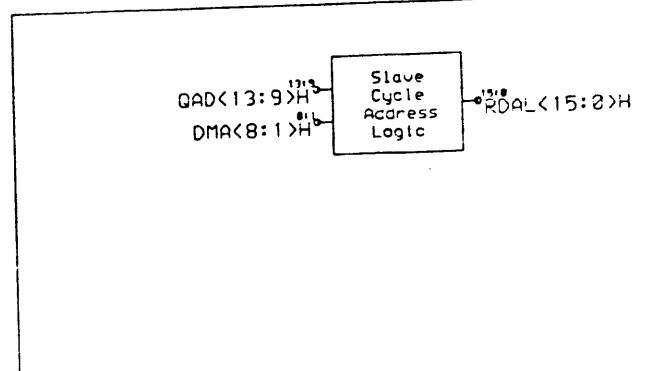

DoorBell Address Decode


"THIS DRAWING AND SPECIFICATIONS, HEREIN, ARE THE PROPERTY OF DIGITAL EQUIPMENT CORPORATION AND SHALL NOT BE REPRODUCED OR COPIED OR USED IN WHOLE OR IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION.
 COPYRIGHT 1986 DIGITAL EQUIPMENT CORPORATION

REVISION HISTORY		
REV	TECO NUMBER	DATE


DRAWING
 LAST MODIFIED=



DRN: ERW	DATE 8-19-86	ENG: ERW	DATE 8-17-86	TITLE: Q-bus Support Logic
CHK'D: ERW	DATE 8-19-86	SHEET 1 OF	NEXT HIGHER ASSEMBLY:	SIZE CODE D CS
				NUMBER M7478-2 -1/
				REV A

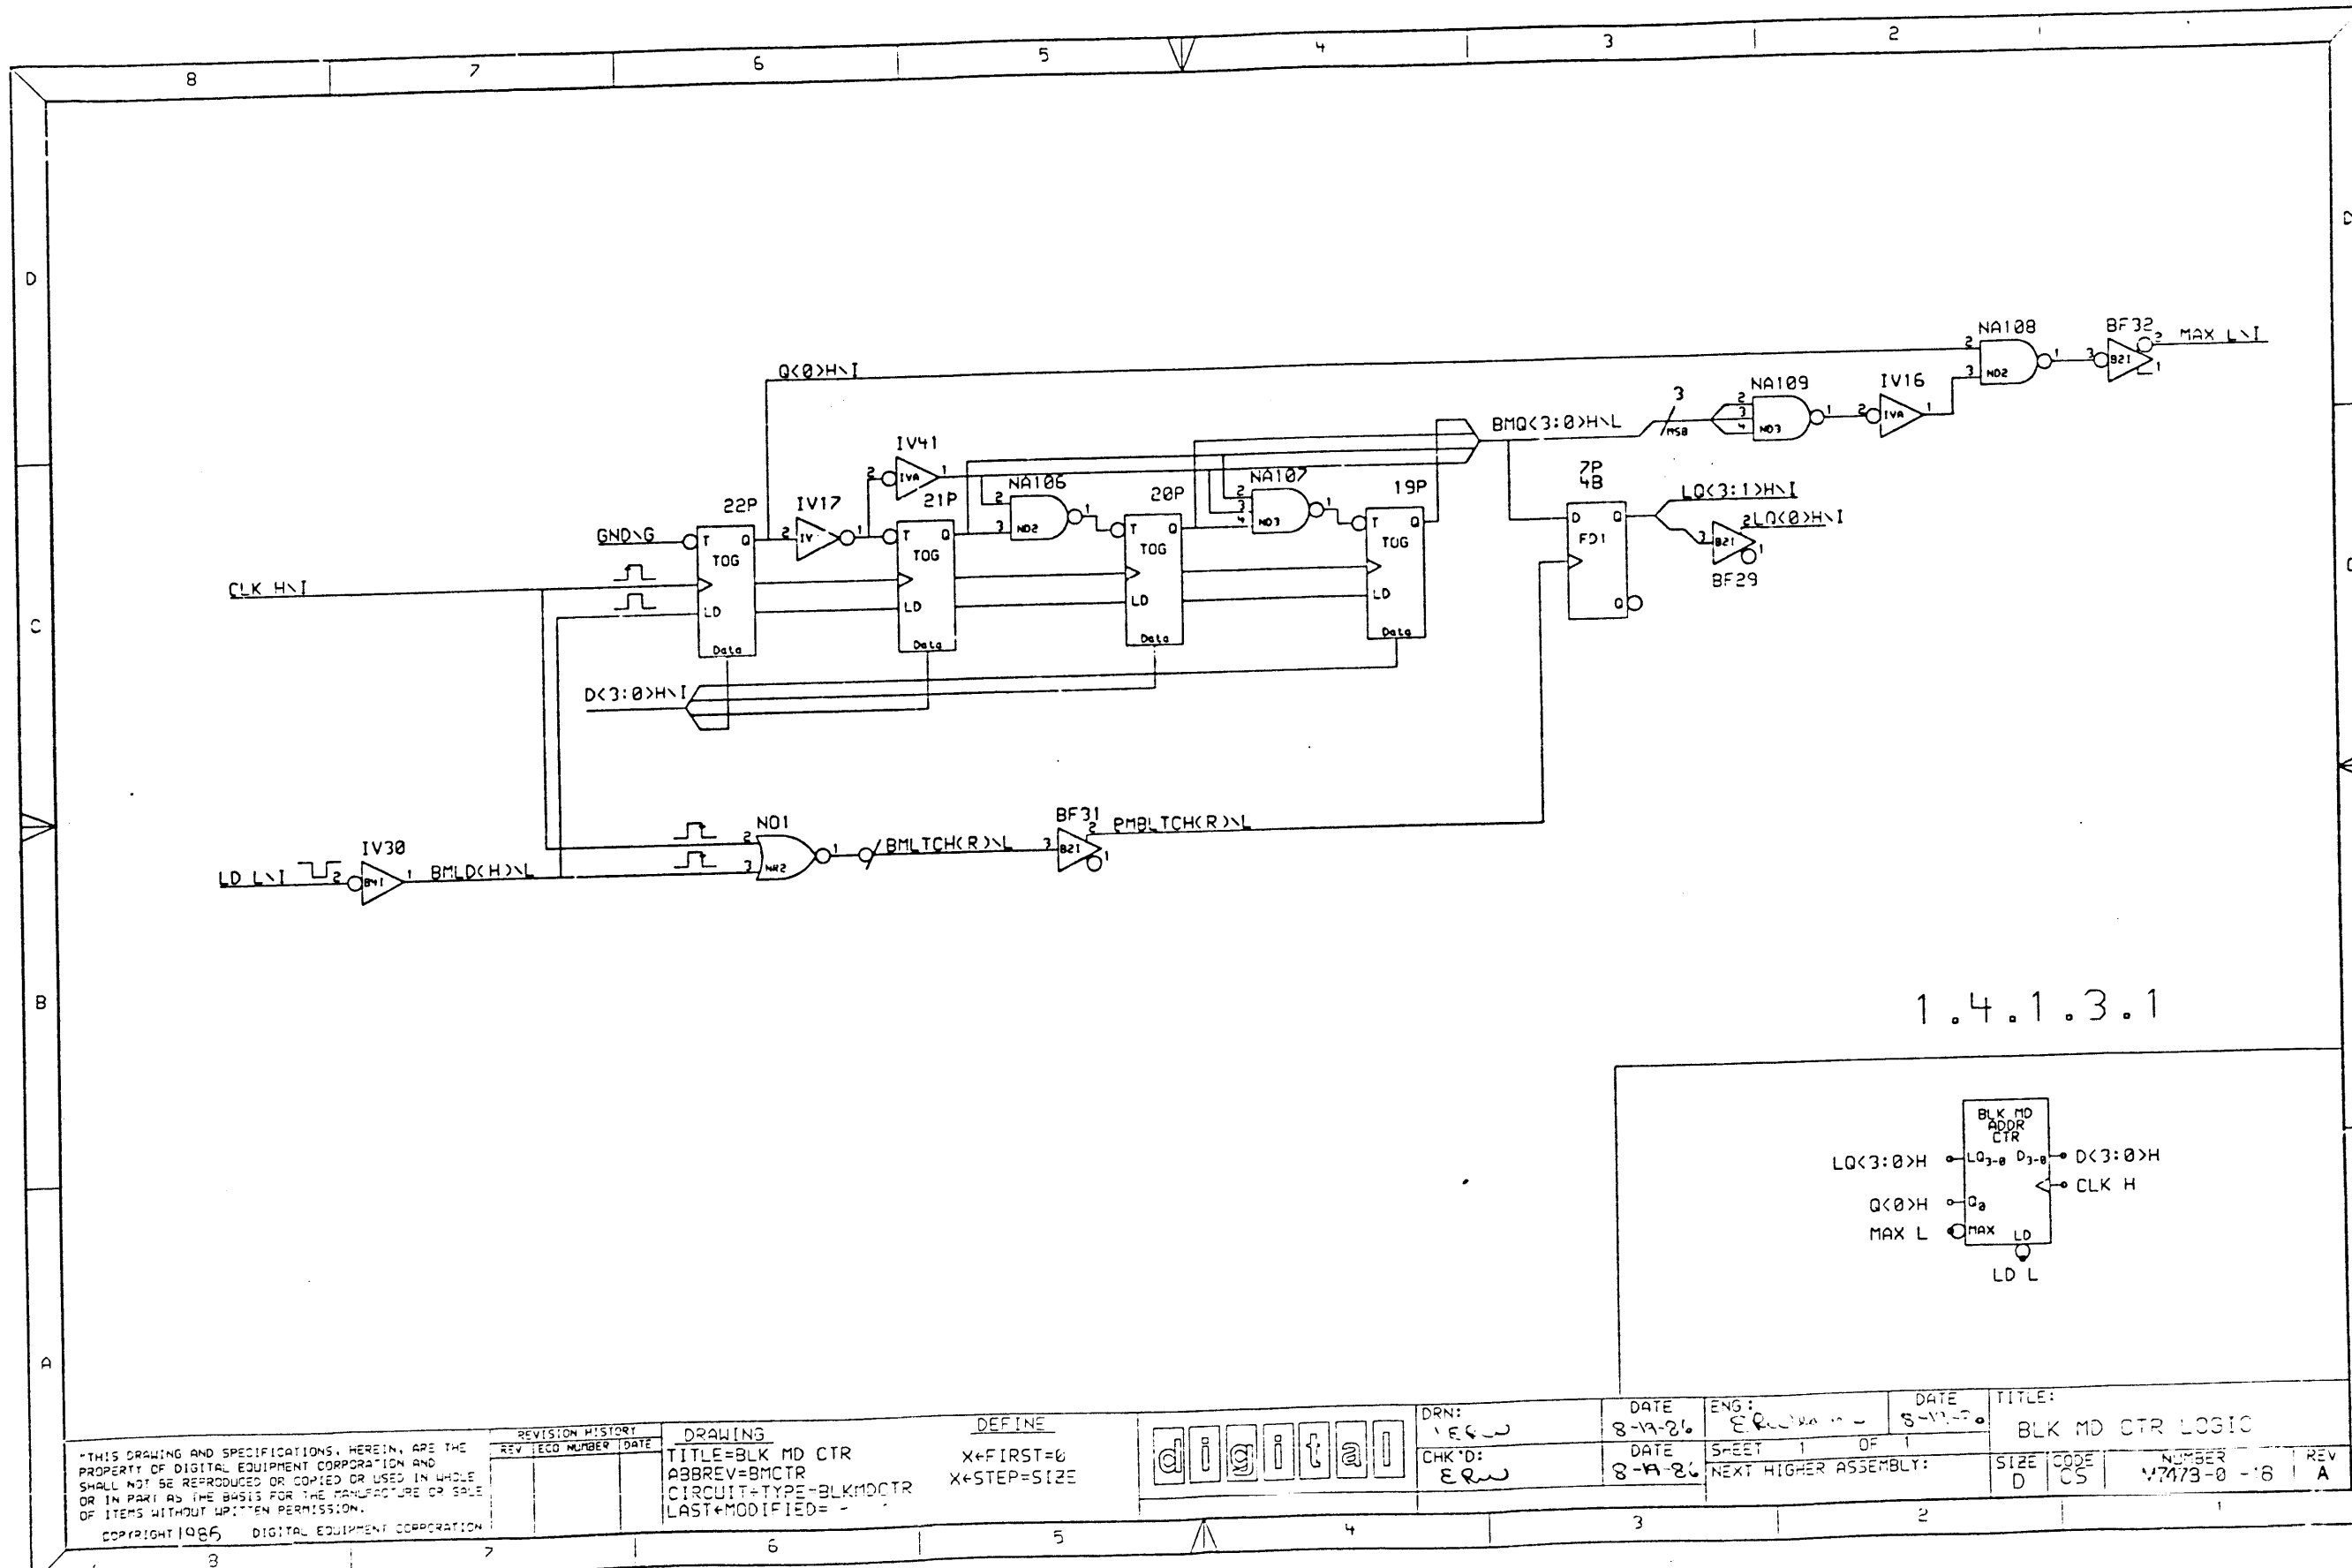

1.4.1.3.1

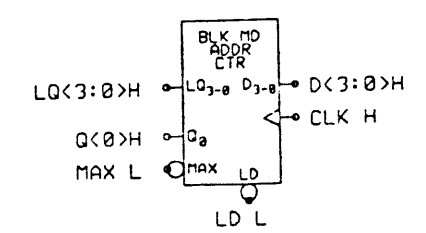

THIS DRAWING AND SPECIFICATIONS, HEREIN, ARE THE PROPERTY OF DIGITAL EQUIPMENT CORPORATION AND SHALL NOT BE REPRODUCED OR COPIED OR USED IN WHOLE OR IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION.
 COPYRIGHT 1985 DIGITAL EQUIPMENT CORPORATION

REVISION HISTORY		
REV	TECO NUMBER	DATE

DRAWING
 TITLE=BLK MD CTR
 ABBREV=BMCTR
 CIRCUIT+TYPE=BLKMDCTR
 LAST+MODIFIED=

DEFINE
 X+FIRST=0
 X+STEP=SIZE




DRN: 1 E G W
 CHK'D: E R W

DATE 8-19-86
 DATE 8-19-86


ENG: ERW
 SHEET 1 OF 1
 NEXT HIGHER ASSEMBLY:

DATE 8-19-86

TITLE:			
SIZE	CODE	NUMBER	REV
D	CS	V7773-0-18	A

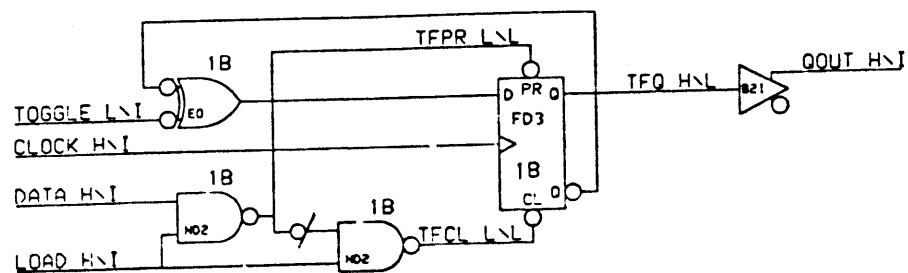

1.4.1.3.1.1



THIS DRAWING AND SPECIFICATIONS, HEREIN, ARE THE PROPERTY OF DIGITAL EQUIPMENT CORPORATION AND SHALL NOT BE REPRODUCED OR COPIED OR USED IN WHOLE OR IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION.

COPYRIGHT 1966 DIGITAL EQUIPMENT CORPORATION

REV	TECO NUMBER	DATE

DRAWING
TITLE=TOG
ABBREV=TOG
LAST MODIFIED=

DEFINE
X+FIRST=0
X+STEP=SIZE

digital

DRN: ERJ

DATE: 5-19-86

ENG: S. P. [unclear]

DATE: 2-17-86

TITLE: TOGGLE FLOP

CHK'D: ERJ


DATE: 5-19-86

SHEET 1 OF 1
NEXT HIGHER ASSEMBLY:


SIZE: D
CODE: CS

NUMBER: M7478-2 -19


REV: A

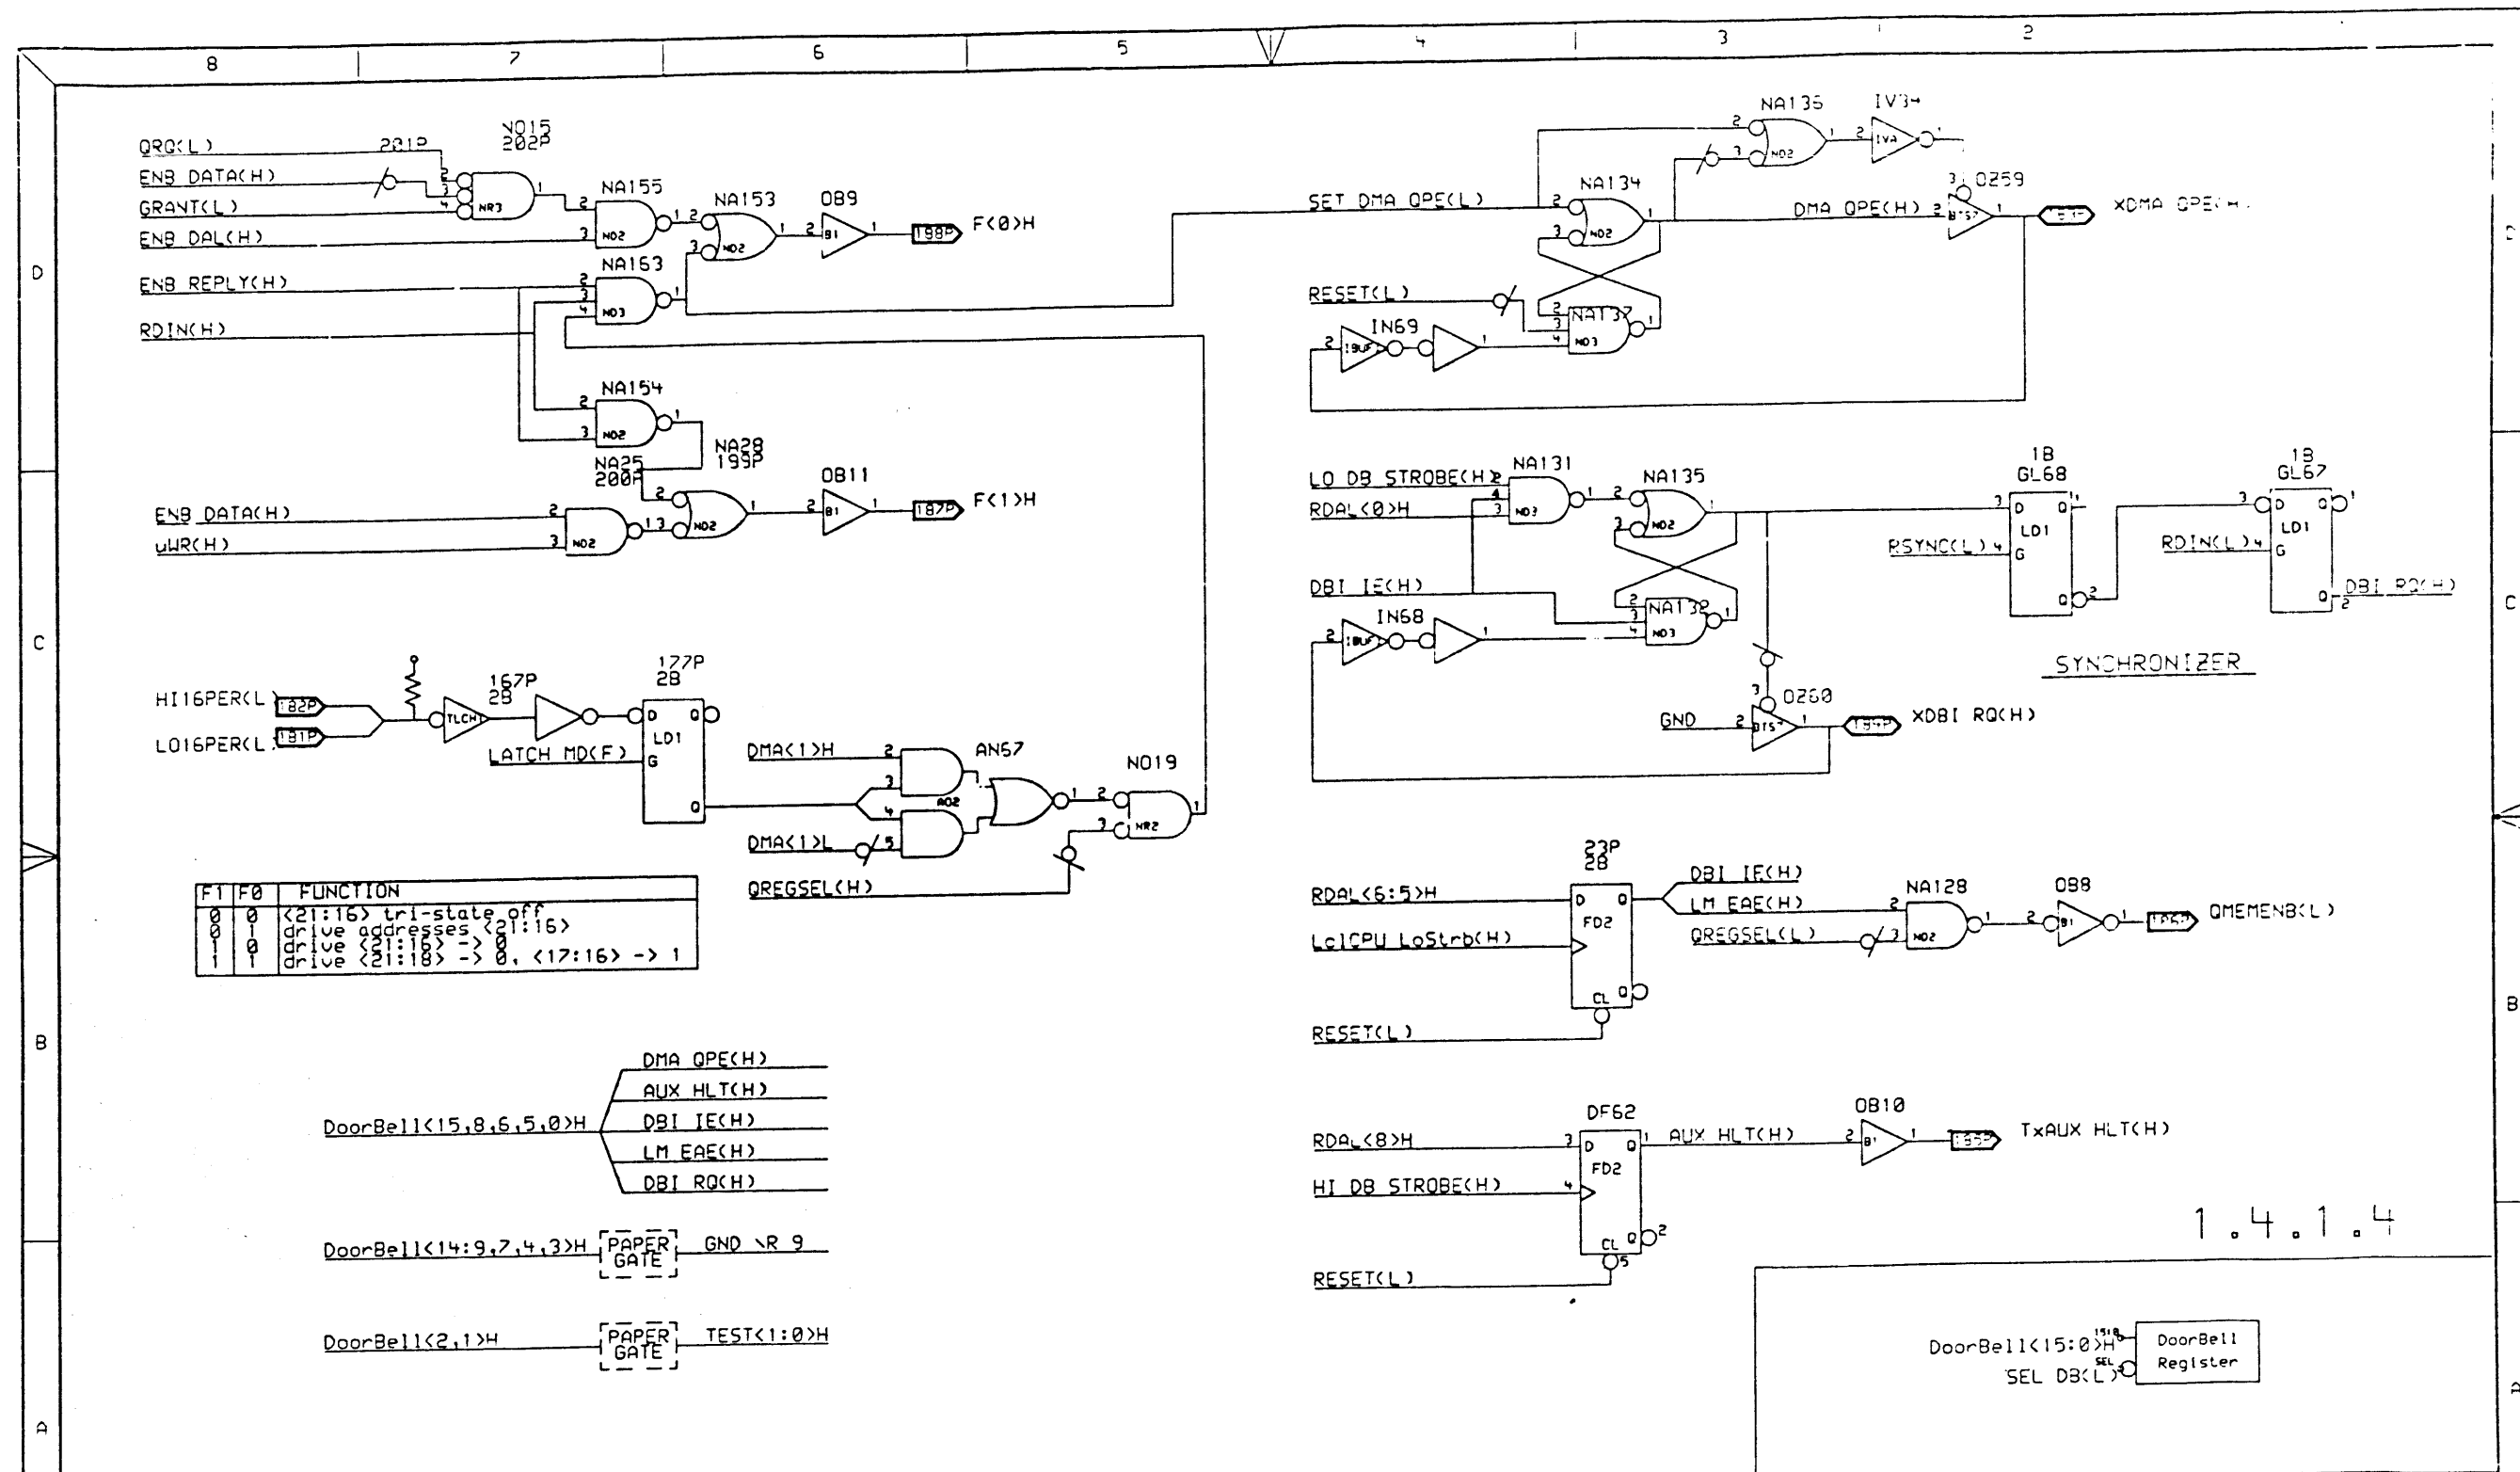

F1	F0	FUNCTION
0	0	<21:16> tri-state off
0	1	drive addresses <21:16>
1	0	drive <21:16> -> 0
1	1	drive <21:16> -> 1

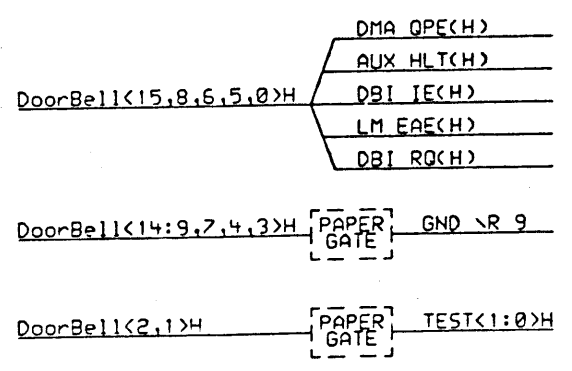

1.4.1.4



THIS DRAWING AND SPECIFICATIONS, HEREIN, ARE THE PROPERTY OF DIGITAL EQUIPMENT CORPORATION AND SHALL NOT BE REPRODUCED OR COPIED OR USED IN WHOLE OR IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION.






COPYRIGHT 1986 DIGITAL EQUIPMENT CORPORATION

REVISION HISTORY		
REV	TECD NUMBER	DATE


DRAWING

digital

DRN: ERW	DATE 8-19-86	ENG: ERW	DATE 8-19-86	TITLE: Q-bus Support Logic
CHK'D: ERW	DATE 8-19-86	SHEET 1	OF 1	STEE CODE D 105
NEXT HIGHER ASSEMBLY:			NUMBER M7478-0-20	REV A

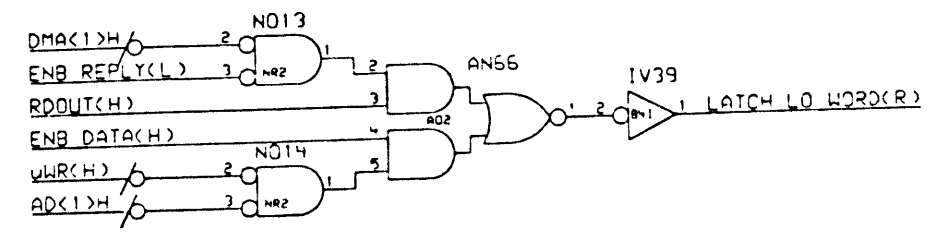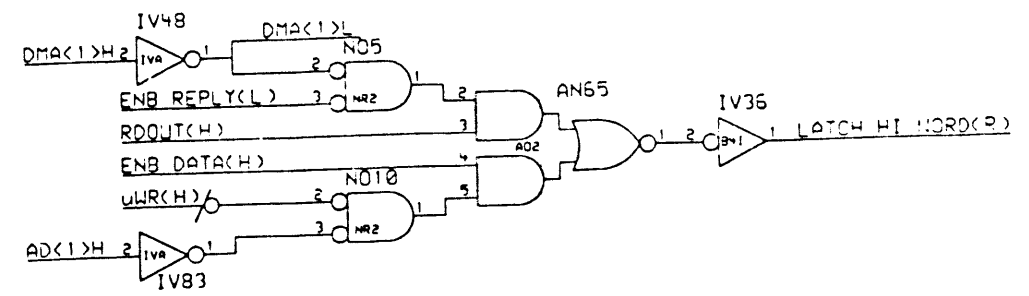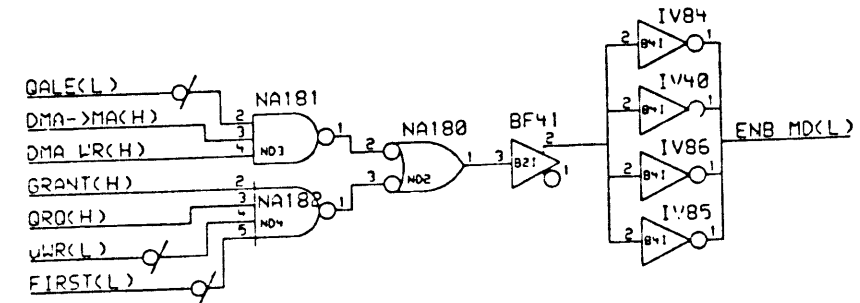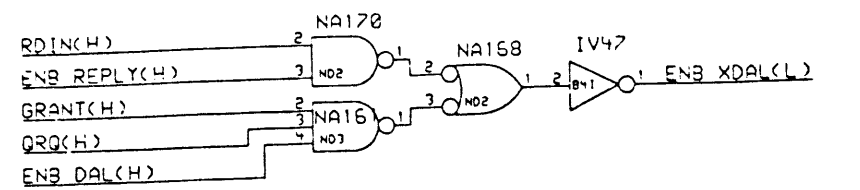


1.4.1.6

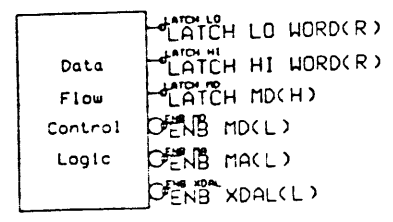


"THIS DRAWING AND SPECIFICATIONS, HEREIN, ARE THE PROPERTY OF DIGITAL EQUIPMENT CORPORATION AND SHALL NOT BE REPRODUCED OR COPIED OR USED IN WHOLE OR IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION.
 COPYRIGHT 1966 DIGITAL EQUIPMENT CORPORATION

REVISION	NUMBER	DATE


DRAWING
 LAST MODIFIED=




DRN: ERW	DATE: 8-19-86	ENG: E. R. Weaver	DATE: 8-19-86	TITLE: Q-bus Support Logic
CHK'D: ERW	DATE: 8-19-86	SHEET 1 OF 1	NEXT HIGHER ASSEMBLY:	SIZE CODE: D 105 NUMBER: M7478-2-22 REV: A

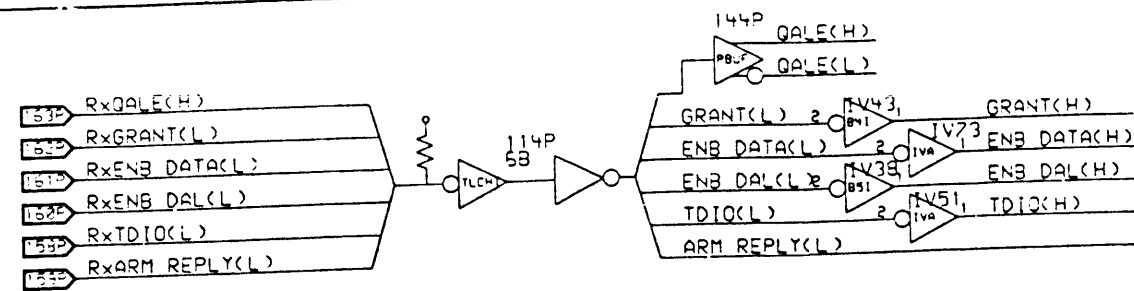



Inputs from Q-bus State Machines

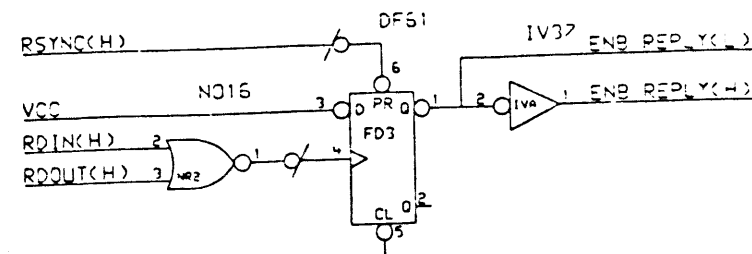


Outputs to Q-bus State Machines

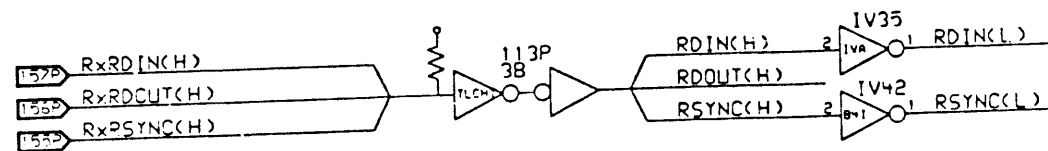


Q-bus Control Signal Inputs

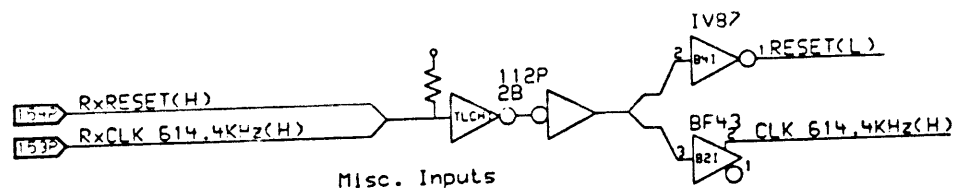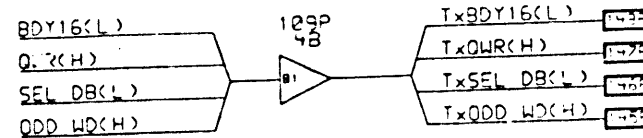

Misc. Inputs

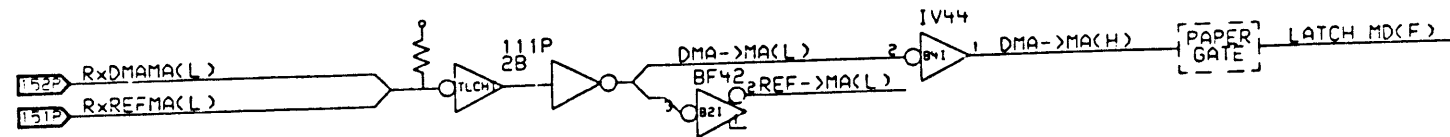


Inputs from Main Memory Controller

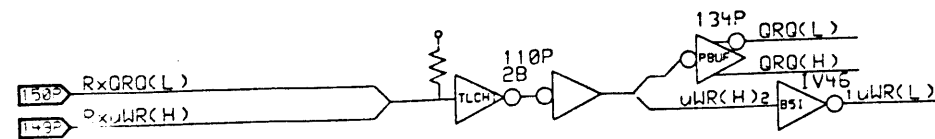

Inputs from VAX cycle machine

1.4.1.7

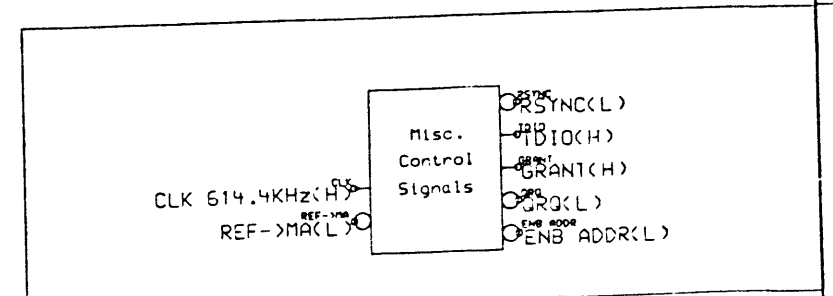


"THIS DRAWING AND SPECIFICATIONS, HEREIN, ARE THE PROPERTY OF DIGITAL EQUIPMENT CORPORATION AND SHALL NOT BE REPRODUCED OR COPIED OR USED IN WHOLE OR IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION."

REVISION HISTORY		
REV	ECO NUMBER	DATE

DRAWING
LAST+MODIFIED=

digital

DRN: ERW	DATE: 8-19-86	ENG: ERW	DATE: 8-19-86	TITLE: Q-bus Support Logic
CHK'D: ERW	DATE: 8-19-86	SHEET: 1 OF 1	INEX: HIGHER ASSEMBLY:	SIZE: 1000
				NUMBERS: M7478-2 -23
				REV: A

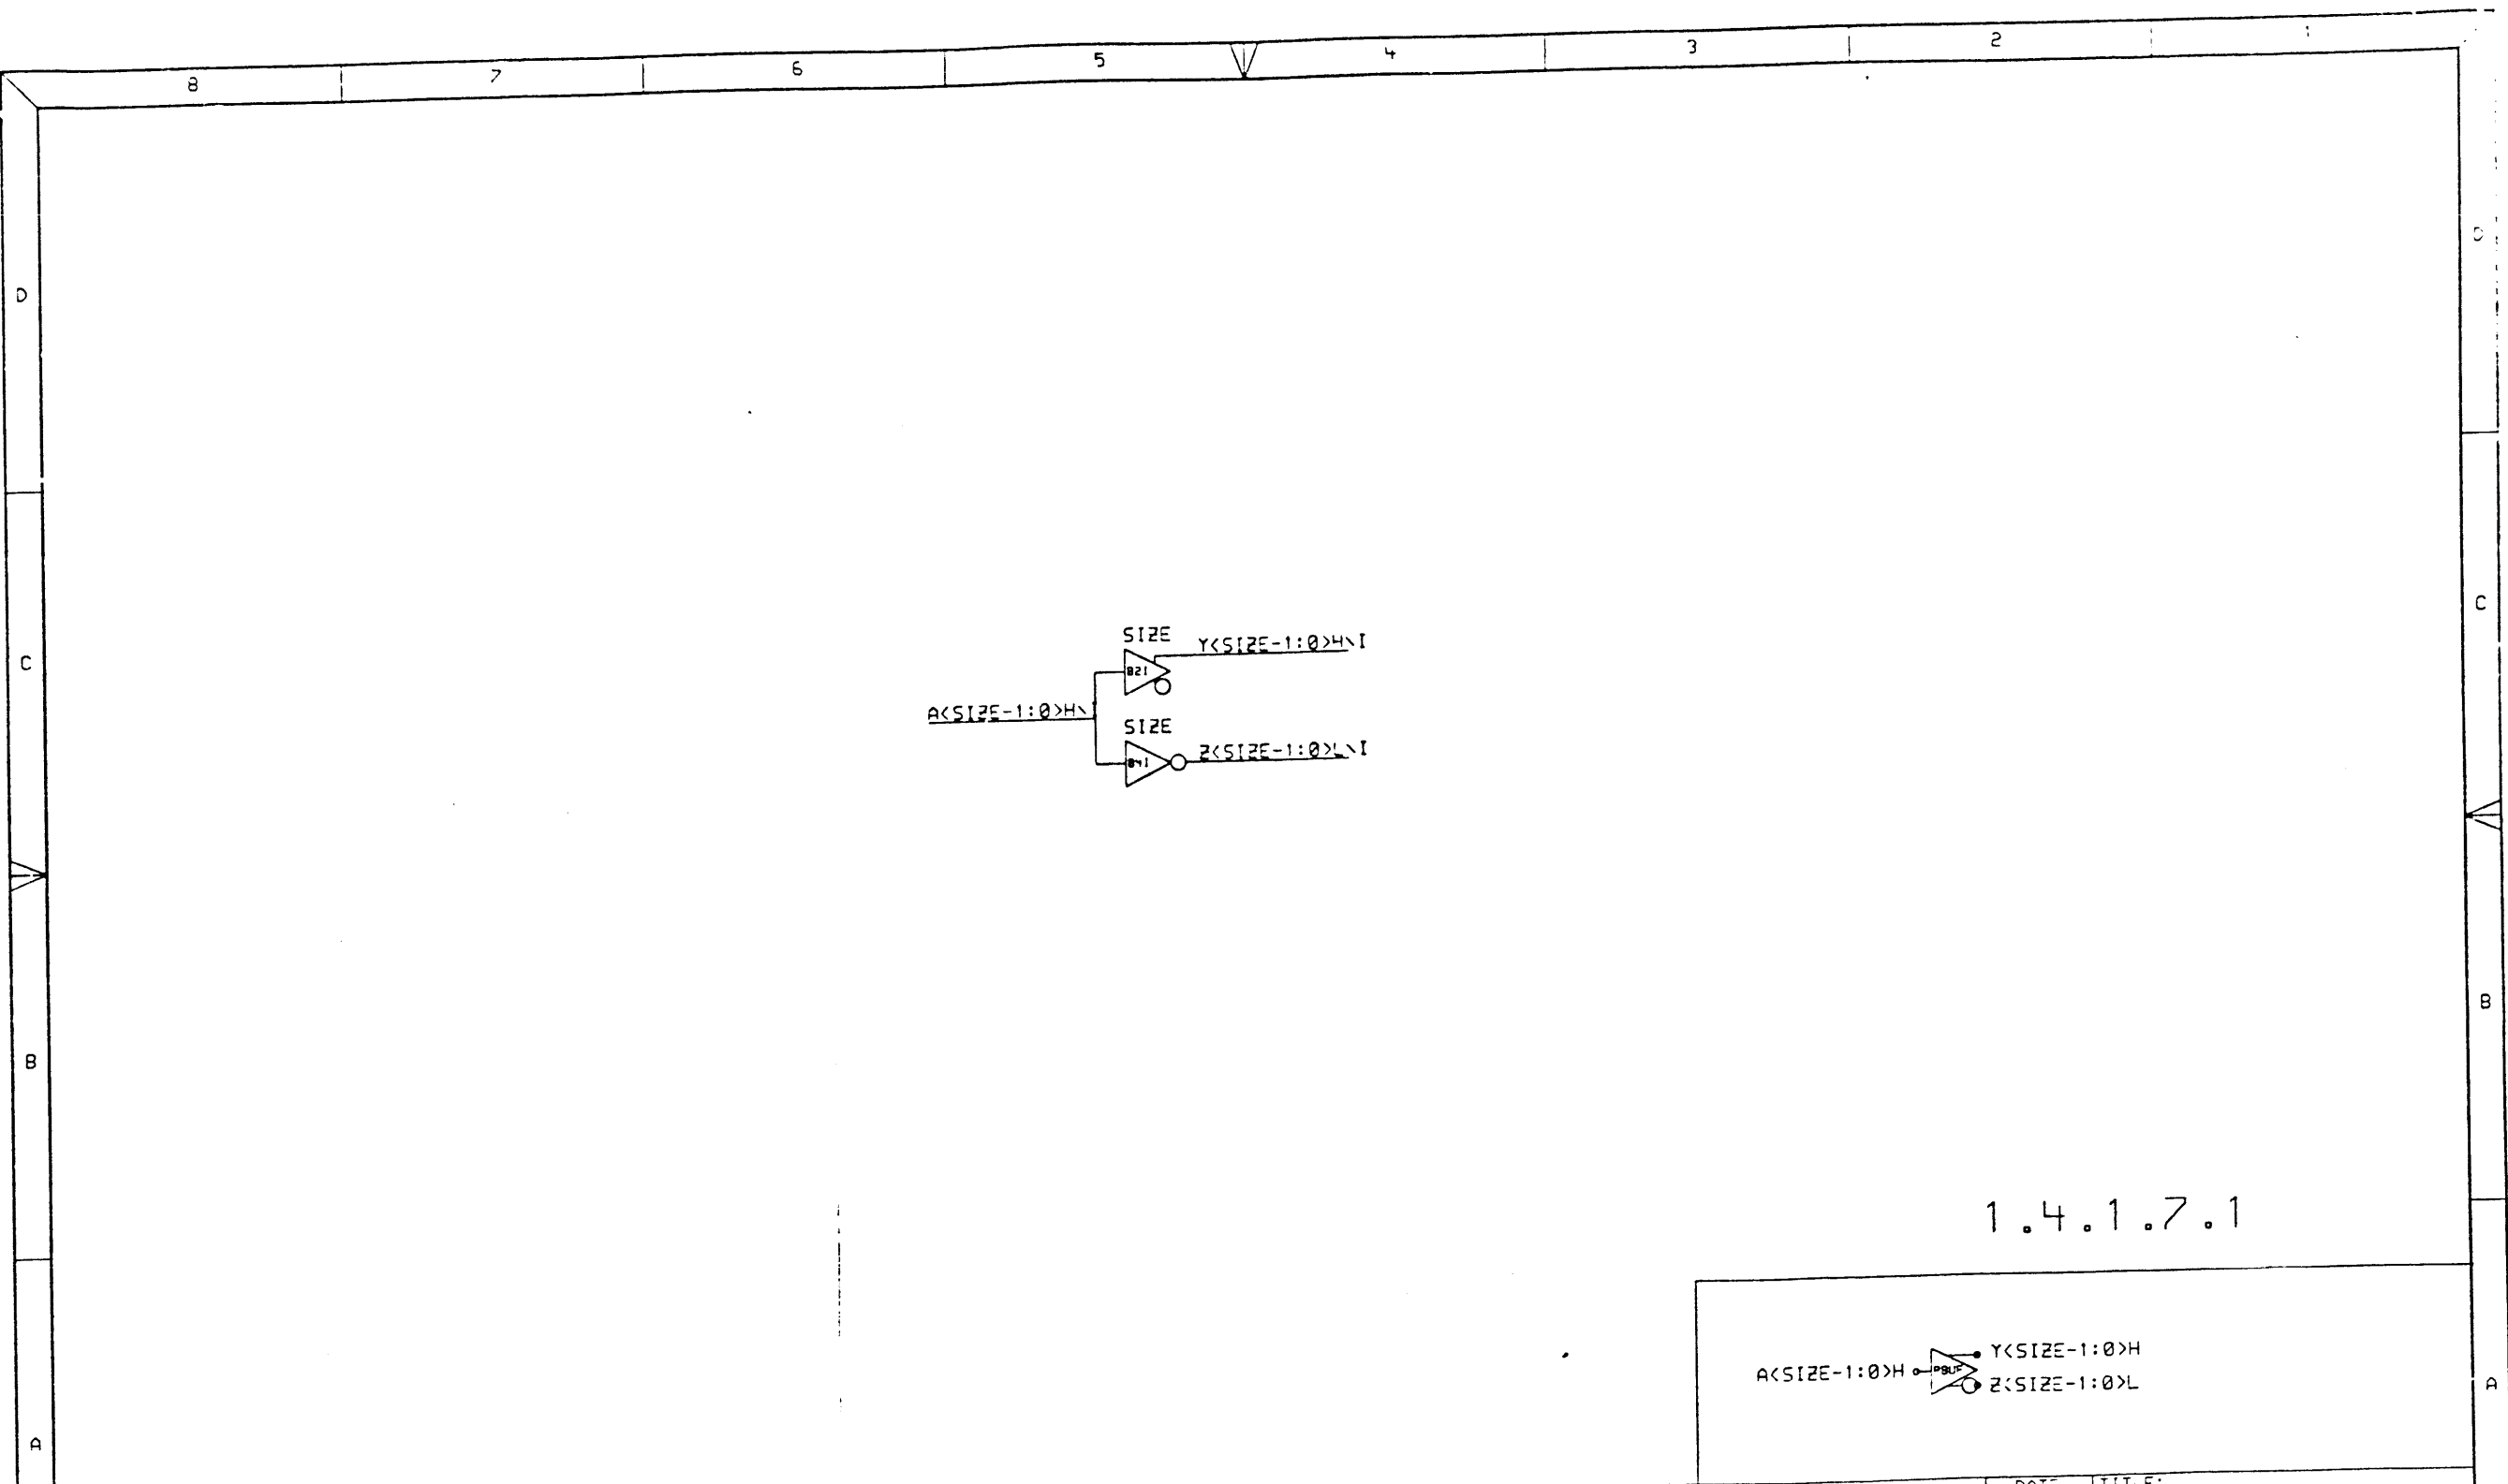

1.4.1.7.1

*THIS DRAWING AND SPECIFICATIONS, HEREIN, ARE THE PROPERTY OF DIGITAL EQUIPMENT CORPORATION AND SHALL NOT BE REPRODUCED OR COPIED OR USED IN WHOLE OR IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION.
 COPYRIGHT 1986 DIGITAL EQUIPMENT CORPORATION

REVISION HISTORY		
REV	ECO NUMBER	DATE


DRAWING
 TITLE=PBUF
 ABBREV=PBUF
 LAST*MODIFIED=

DEFINE
 X*FIRST 0
 X*STEP=SIZE



DRN: ERW	DATE 8-19-86	ENG: ERW	DATE 8-19-86
CHK'D: ERW	DATE 8-19-86	SHEET 1 OF 1	TITLE: Power Buffer Macro
NEXT HIGHER ASSEMBLY:			SIZE CODE D CS

NUMBER M7478-0-24	REV A
----------------------	----------

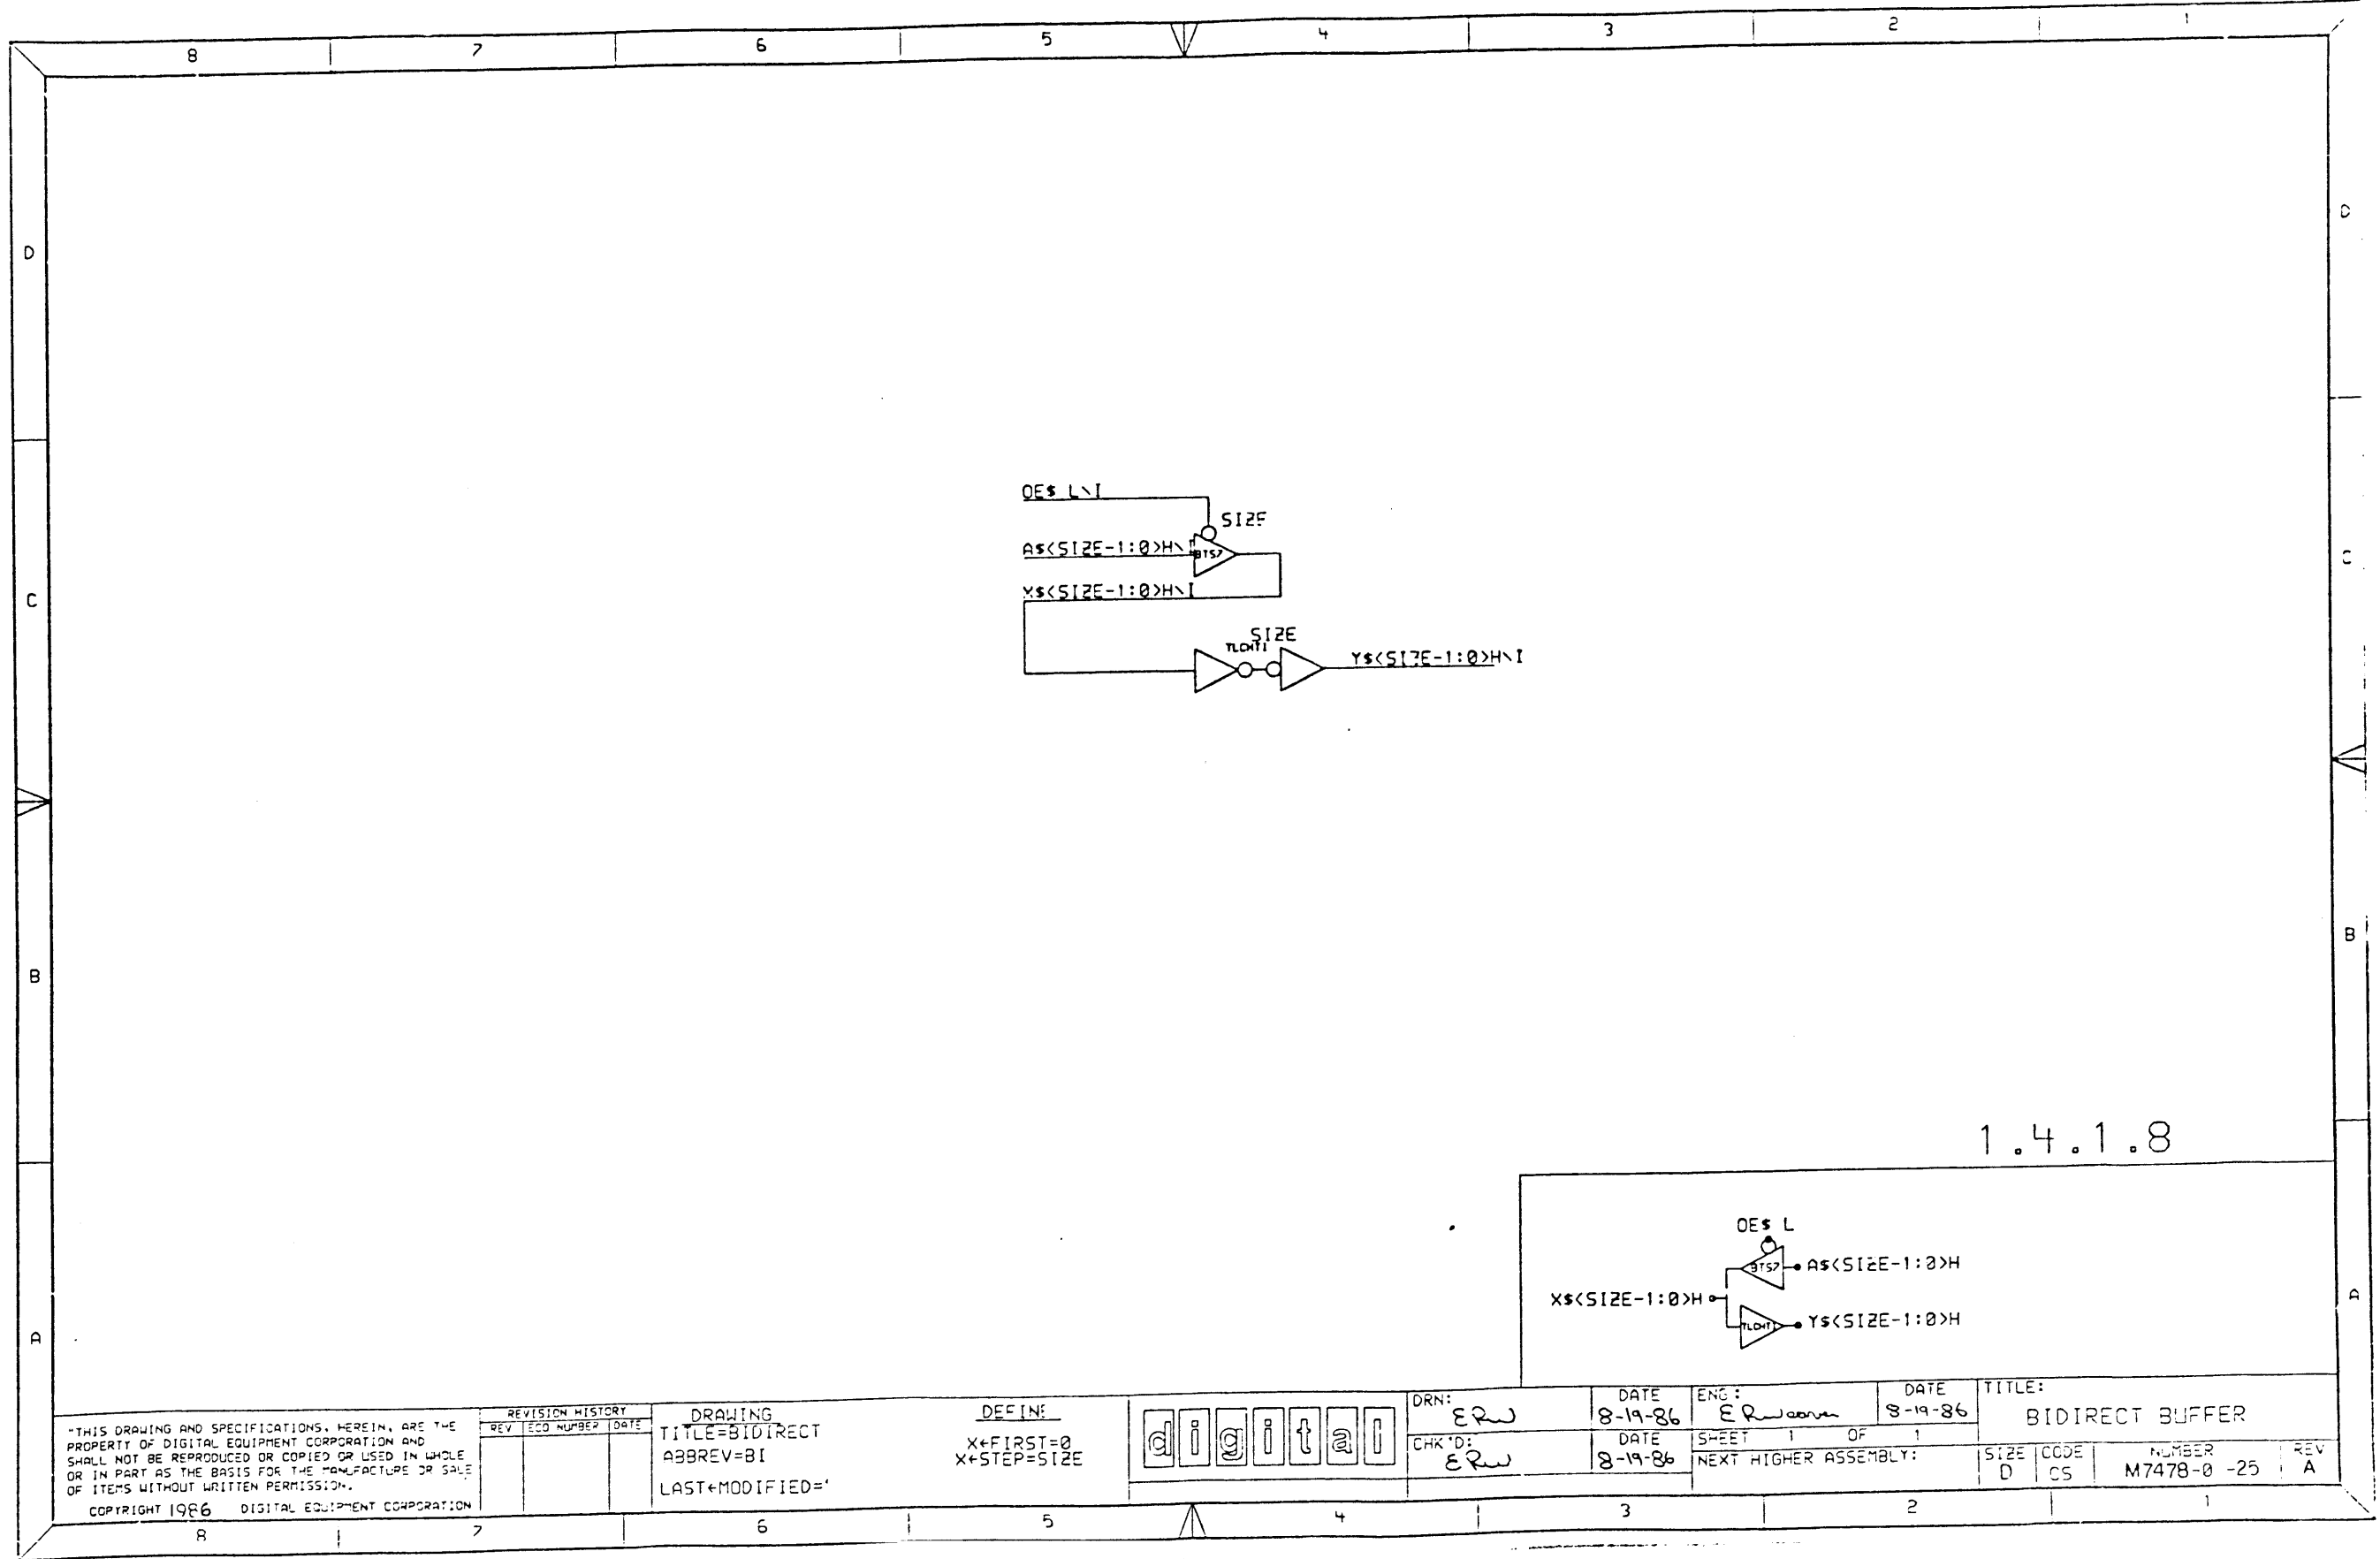

THIS DRAWING AND SPECIFICATIONS, HEREIN, ARE THE PROPERTY OF DIGITAL EQUIPMENT CORPORATION AND SHALL NOT BE REPRODUCED OR COPIED OR USED IN WHOLE OR IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION.
 COPYRIGHT 1986 DIGITAL EQUIPMENT CORPORATION

REVISION HISTORY		
REV	ECO NUMBER	DATE

DRAWING
 TITLE=BIDIRECT
 ABBREV=BI
 LAST+MODIFIED=

DEFINE
 X+FIRST=0
 X+STEP=SIZE

digital

DRN: ERW
 CHK'D: ERW

DATE 8-19-86


ENG: ERW
 SHEET 1 OF 1

DATE 8-19-86

TITLE: BIDIRECT BUFFER

NEXT HIGHER ASSEMBLY:

SIZE	CODE	NUMBER	REV
D	CS	M7478-0-25	A

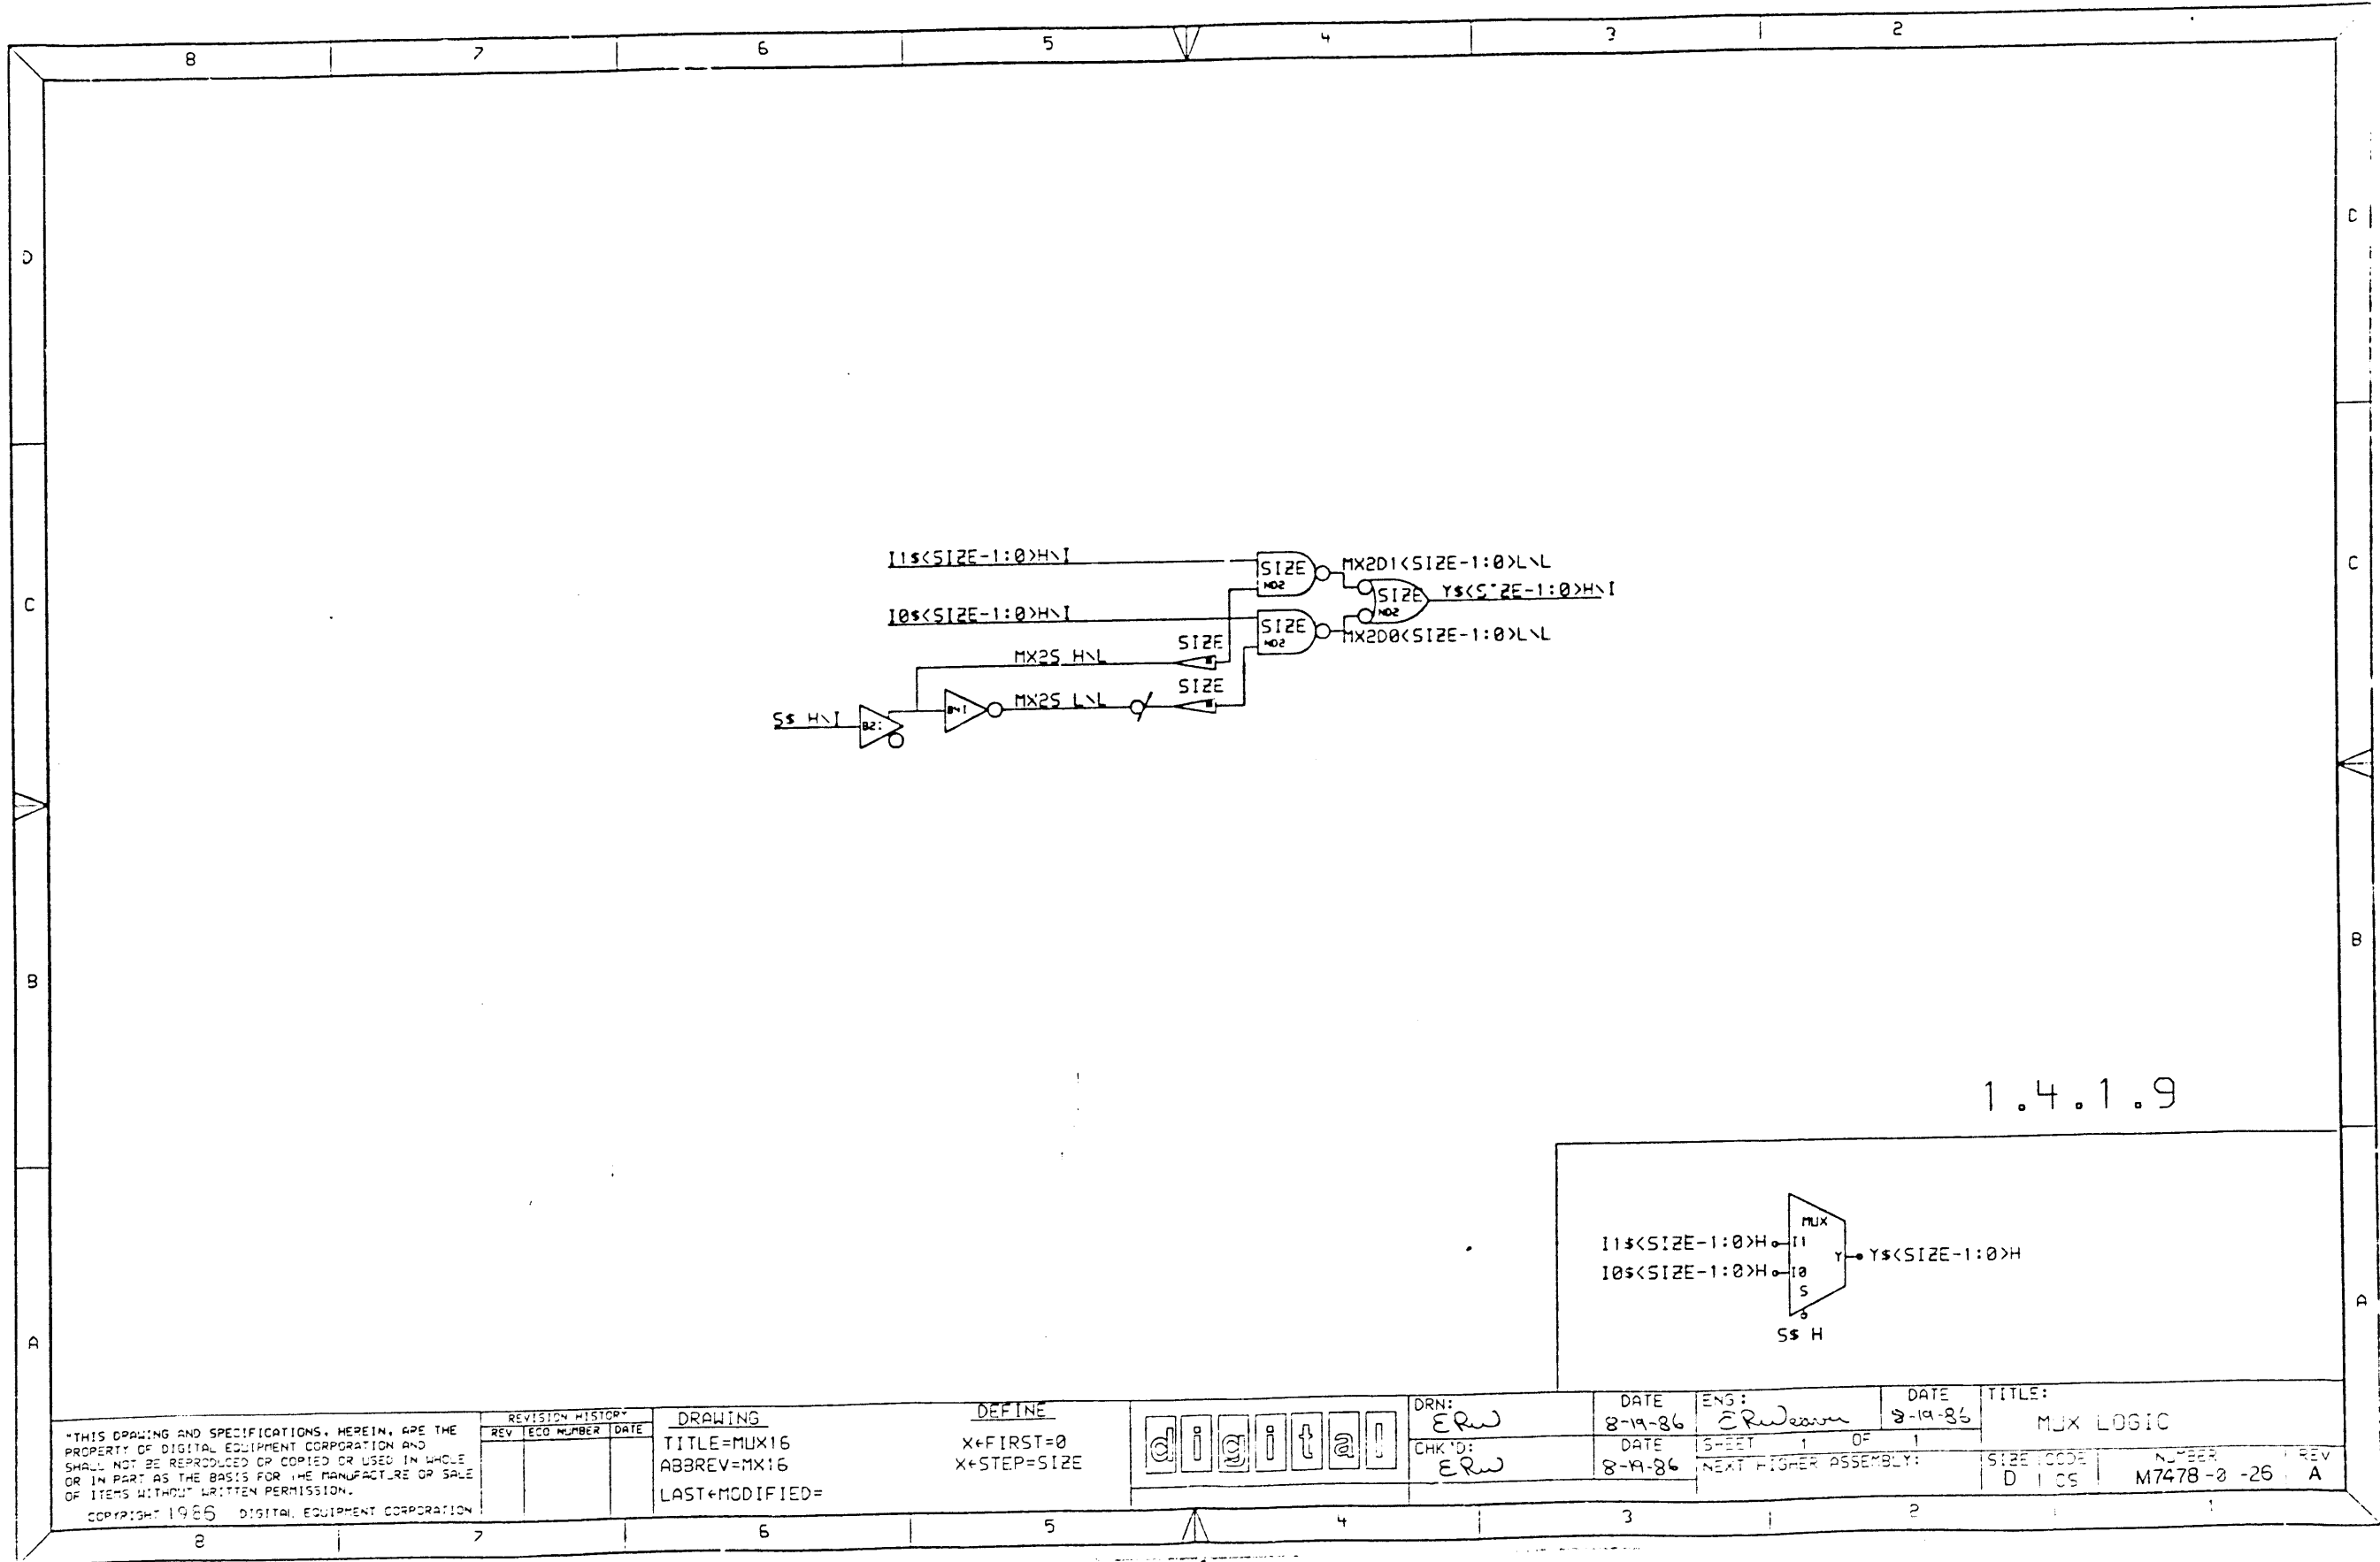


"THIS DRAWING AND SPECIFICATIONS, HEREIN, ARE THE PROPERTY OF DIGITAL EQUIPMENT CORPORATION AND SHALL NOT BE REPRODUCED OR COPIED OR USED IN WHOLE OR IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION.
 COPYRIGHT 1966 DIGITAL EQUIPMENT CORPORATION

REVISION HISTORY		
REV	ECO NUMBER	DATE

DRAWING
 TITLE=MUX16
 ABBREV=MX16
 LAST*MODIFIED=

DEFINE
 X*FIRST=0
 X*STEP=SIZE



DRN: ERW
 CHK'D: ERW

DATE: 8-19-86
 DATE: 8-19-86


ENG: ERW
 SHEET 1 OF 1
 NEXT FISHER ASSEMBLY:

DATE: 8-19-86
 TITLE: MUX LOGIC

REV: A

SIZE CODE: DICS

NUMBER: M7478-0-26

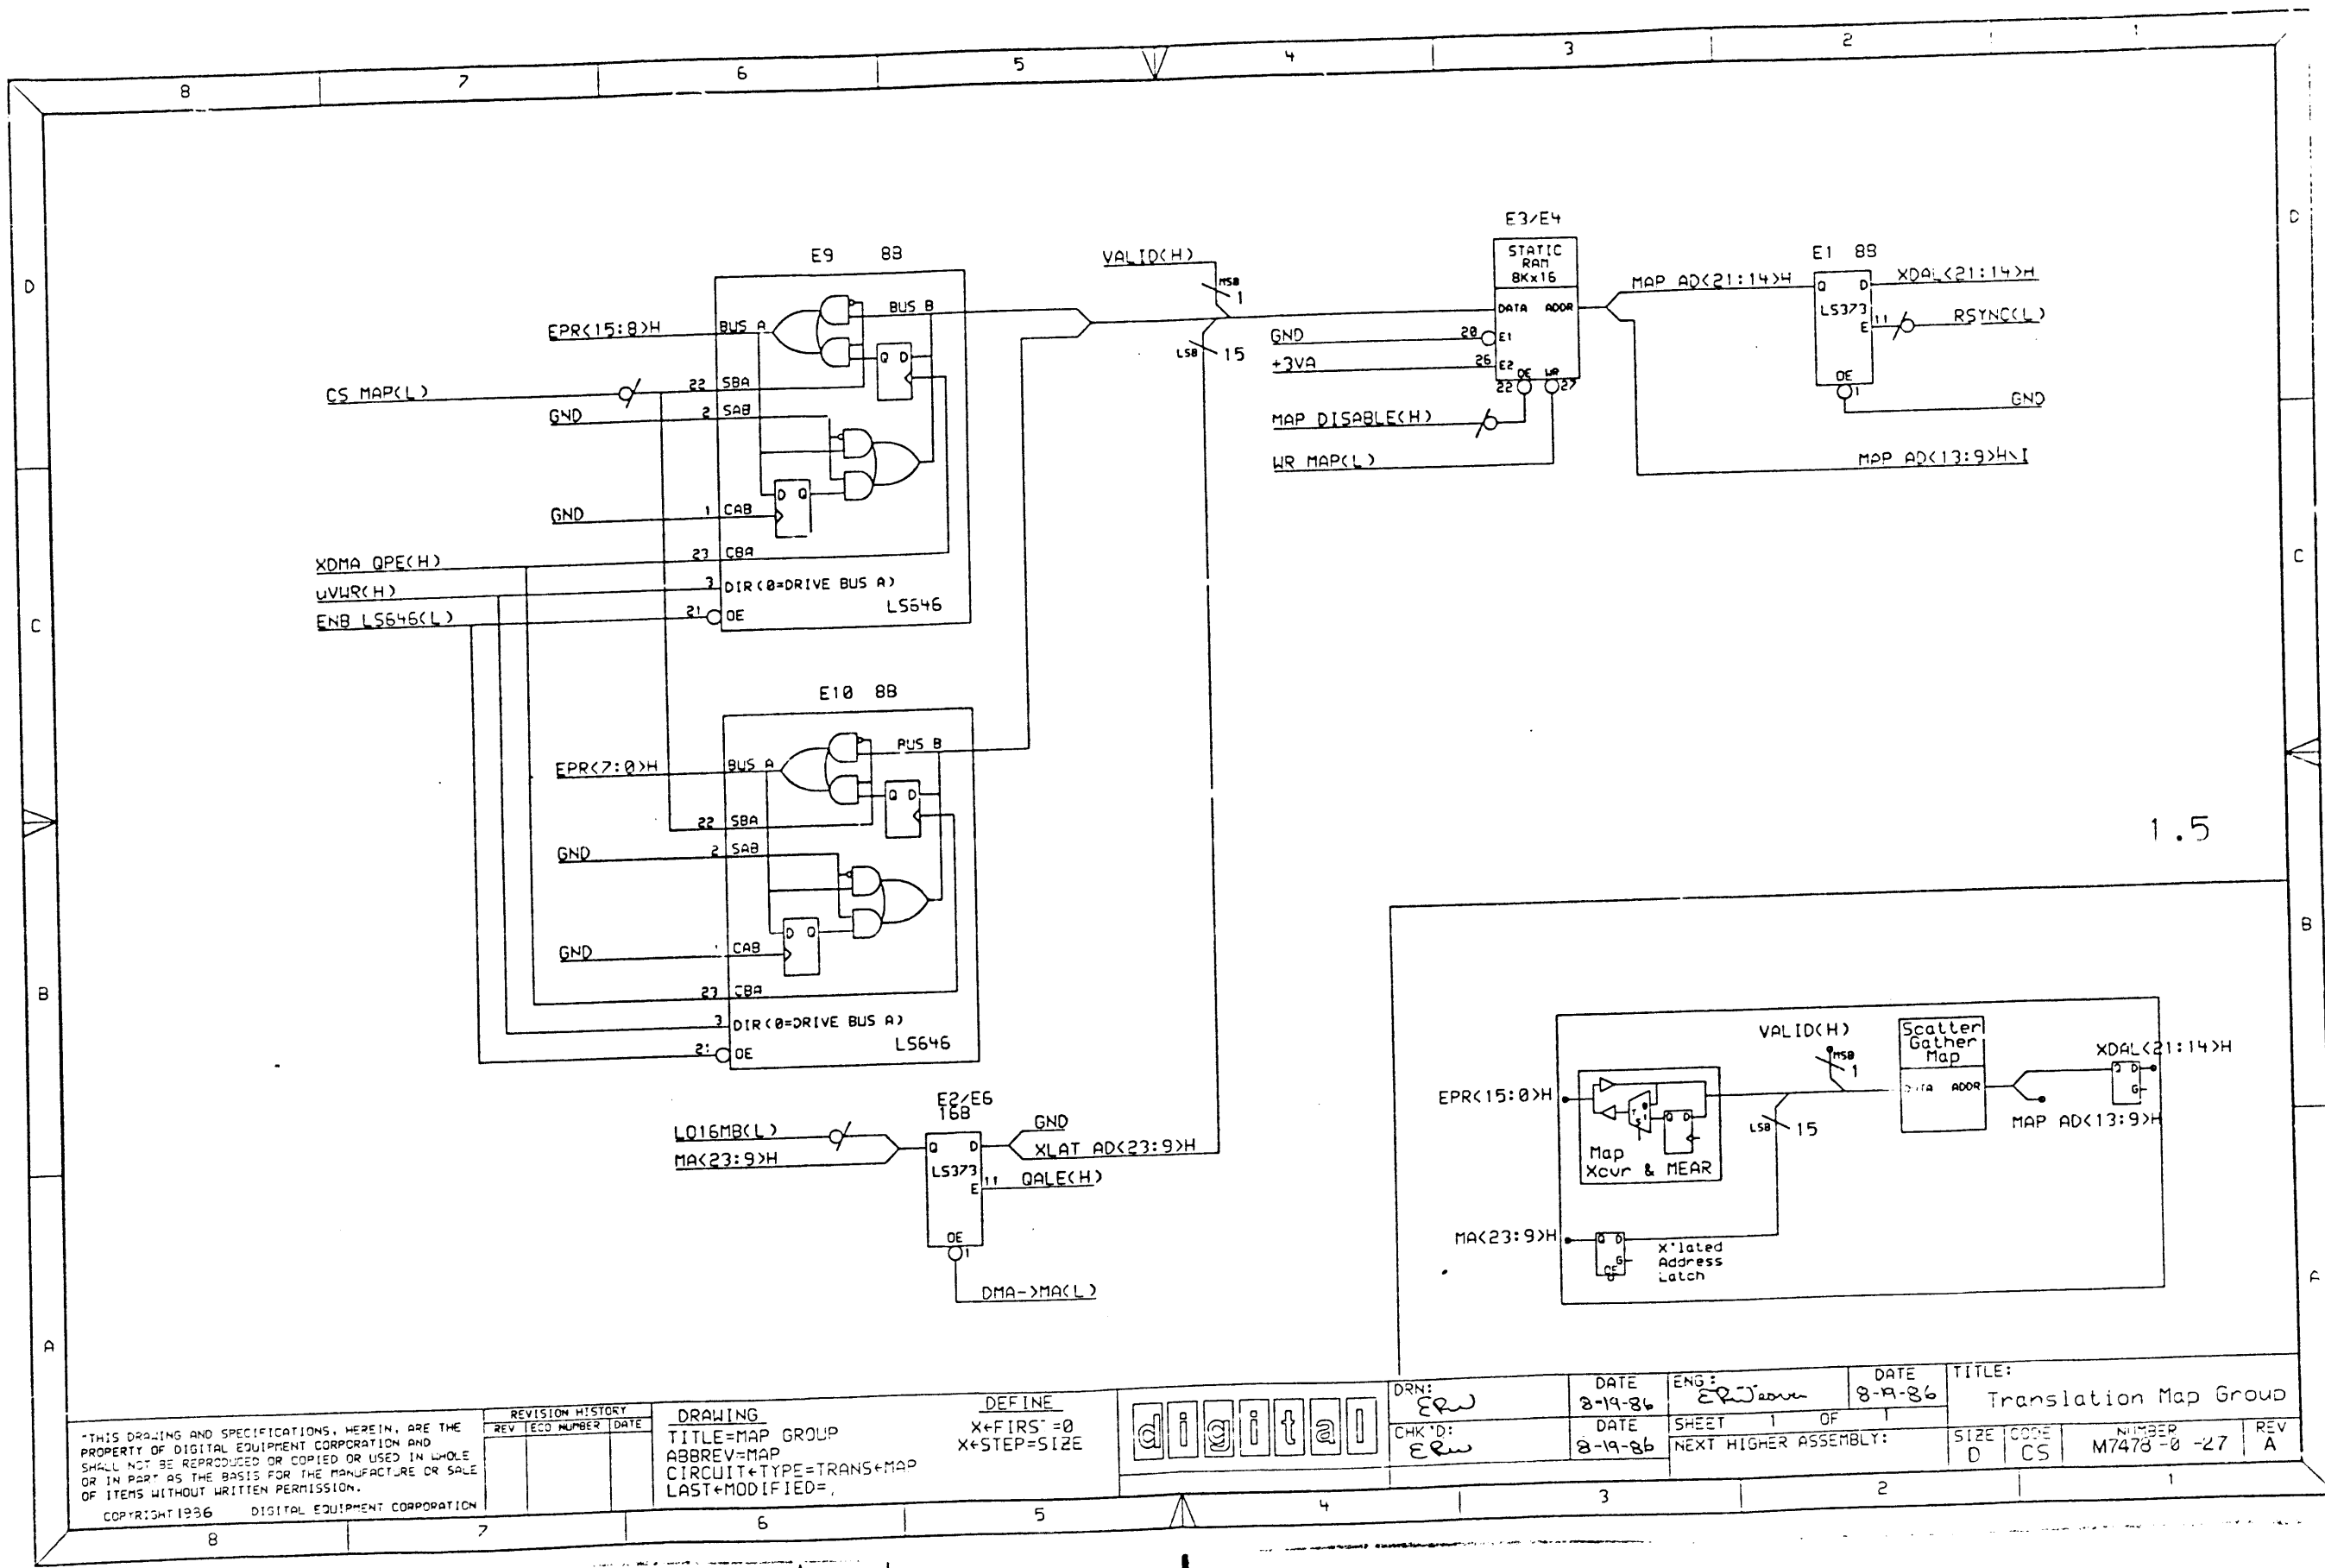

*THIS DRAWING AND SPECIFICATIONS, HEREIN, ARE THE PROPERTY OF DIGITAL EQUIPMENT CORPORATION AND SHALL NOT BE REPRODUCED OR COPIED OR USED IN WHOLE OR IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION.
 COPYRIGHT 1986 DIGITAL EQUIPMENT CORPORATION

REVISION HISTORY		
REV	TECD NUMBER	DATE

DRAWING
 TITLE=MAP GROUP
 ABBREV=MAP
 CIRCUIT+TYPE=TRANS+MAP
 LAST+MODIFIED=


DEFINE
 X+FIRST=0
 X+STEP=SIZE



DRN: ERW
 CHK'D: ERW

DATE: 8-19-86
 DATE: 8-19-86

ENG: ERW
 DATE: 8-19-86
 SHEET 1 OF 1
 NEXT HIGHER ASSEMBLY:
 TITLE: Translation Map Group
 SIZE: 0 CS
 NUMBER: M7478-0-27
 REV: A

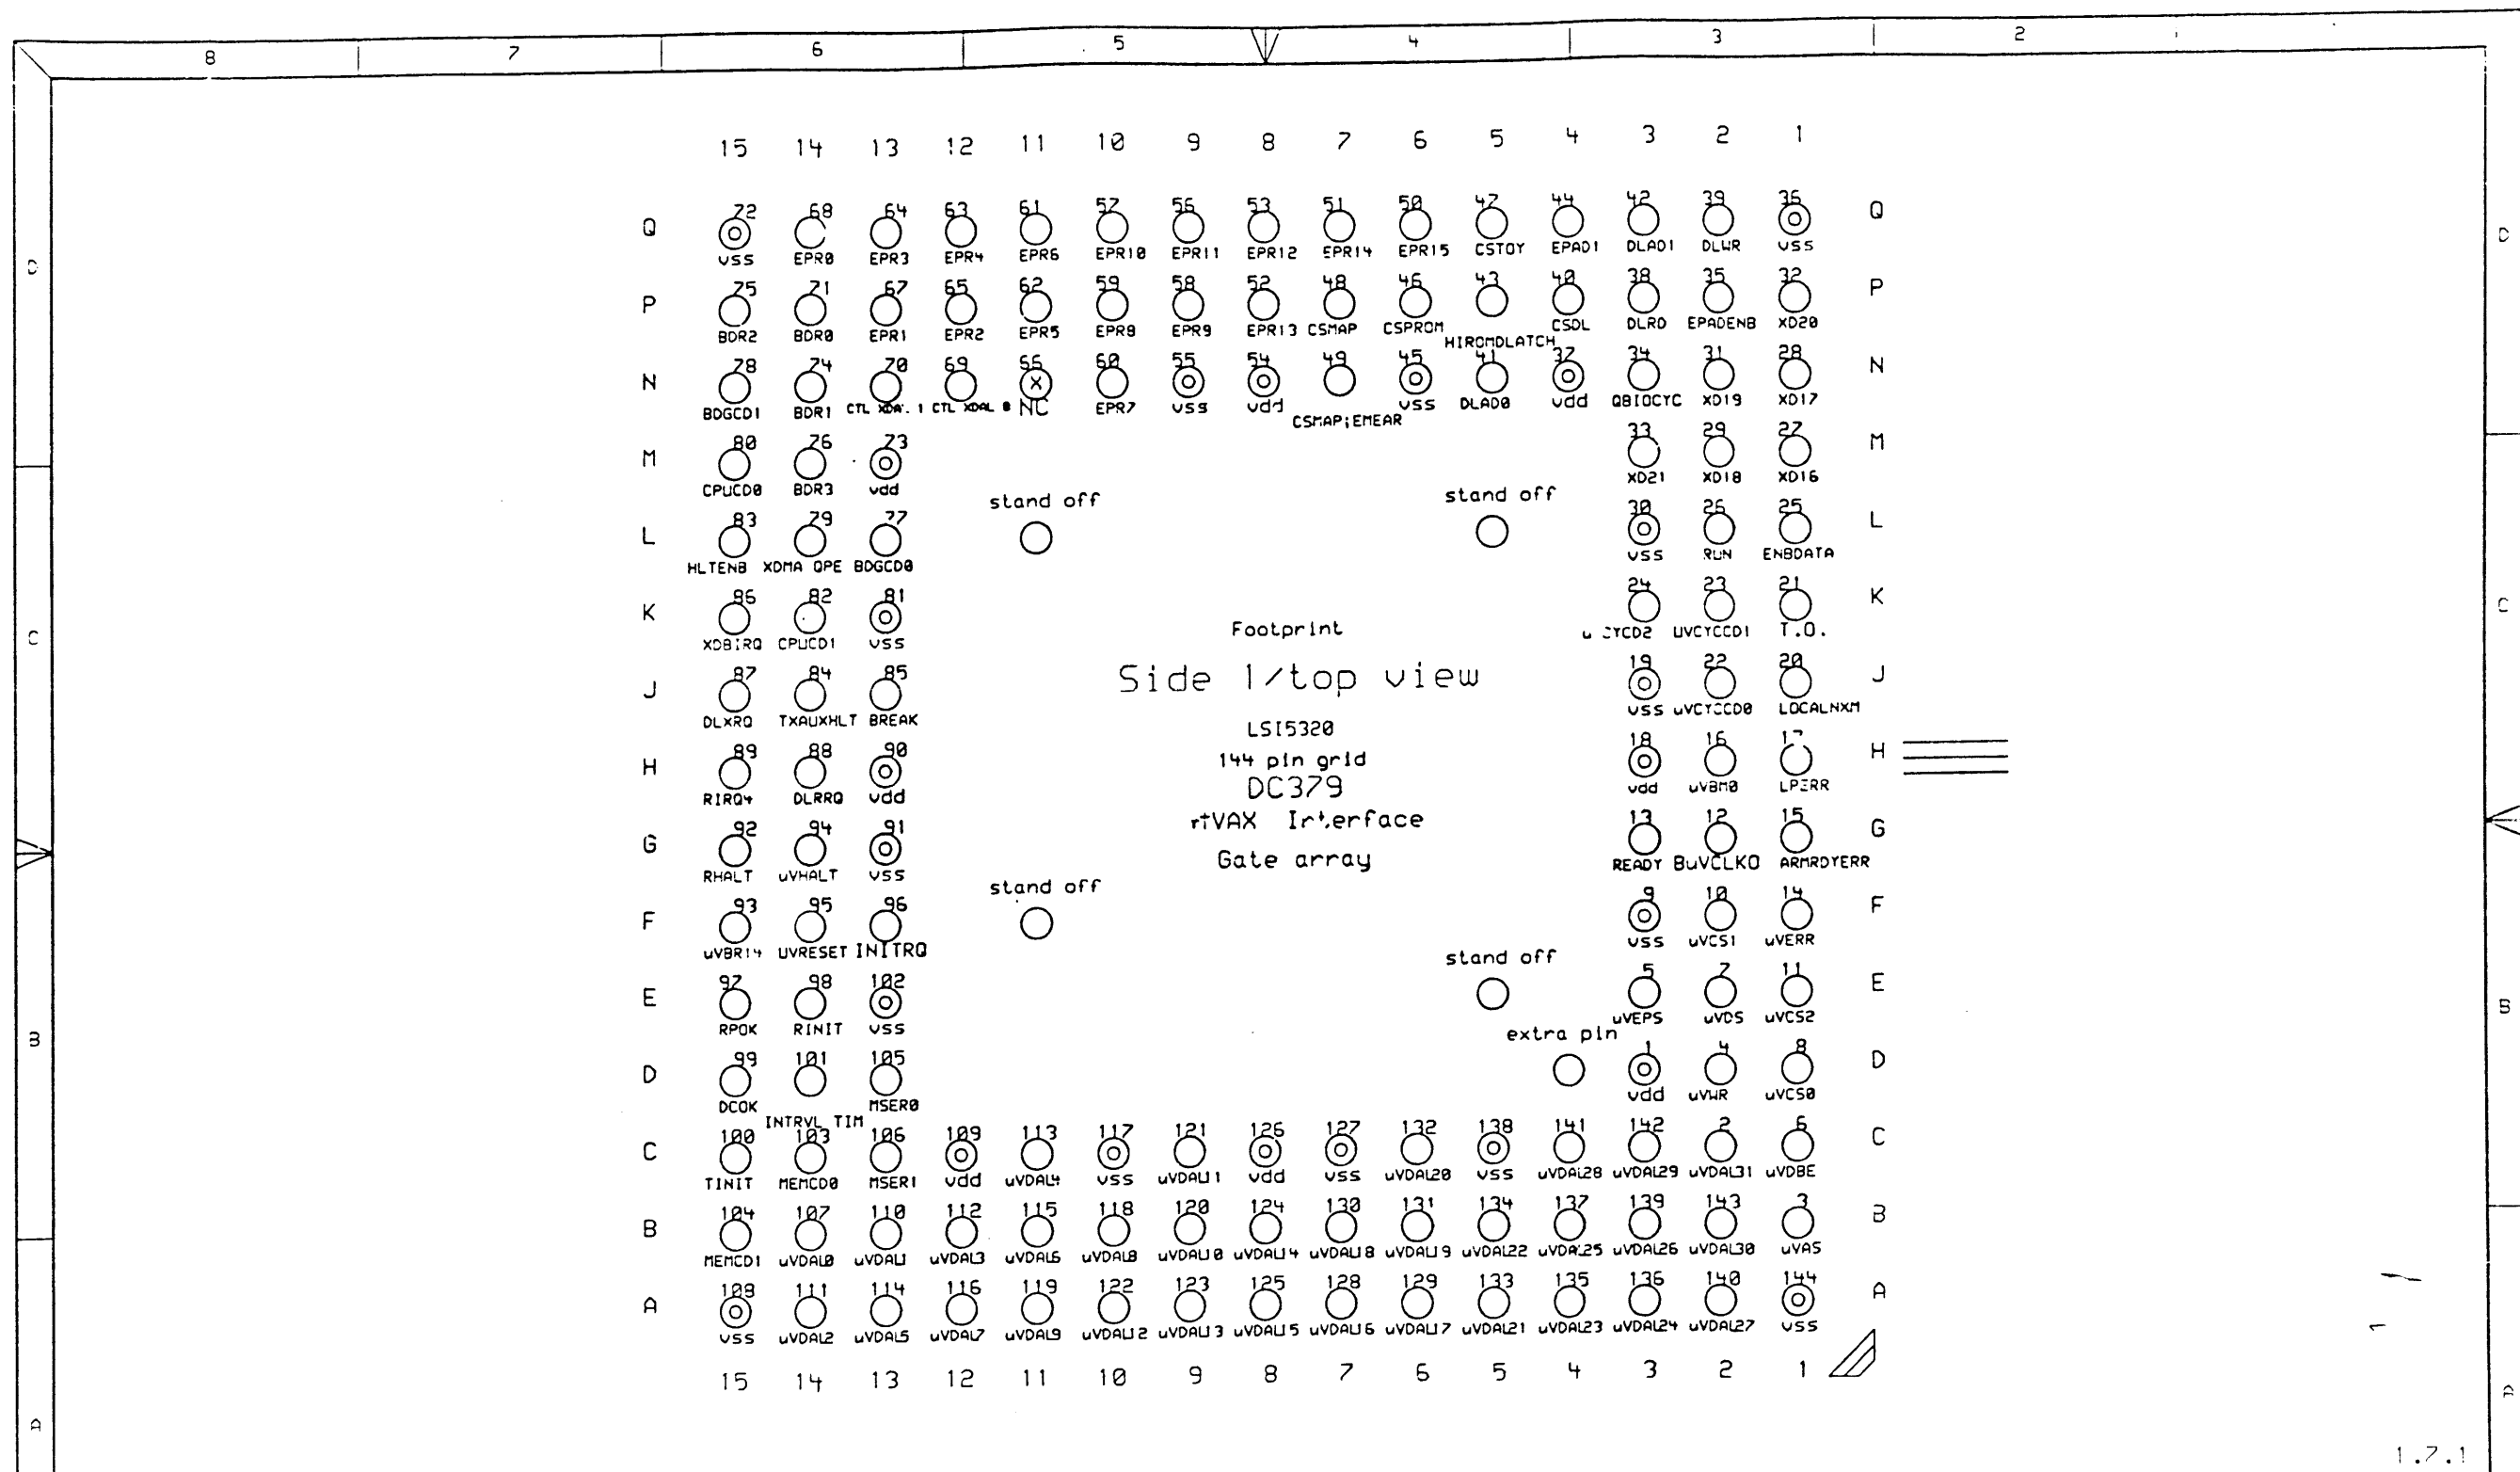


THIS DRAWING AND SPECIFICATIONS, HEREIN, ARE THE PROPERTY OF DIGITAL EQUIPMENT CORPORATION AND SHALL NOT BE REPRODUCED OR COPIED OR USED IN WHOLE OR IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION.
 COPYRIGHT 1986 DIGITAL EQUIPMENT CORPORATION

REVISION HISTORY		
REV	ECO NUMBER	DATE

DRAWING
 TITLE=galpads
 LAST*MODIFIED

DEFINE
 X*FIRST=0
 X*STEP=SIZE




DRN: ERW
 DATE: 8-19-86
 CHK'D: ERW
 DATE: 8-19-86

ENG: E. P. ...
 DATE: 8-19-86
 SHEET 1 OF 1
 NEXT HIGHER ASSEMBLY:

TITLE: DC379 PAD ASSIGNMENT TOP VIEW
 LL5320 IN 144 PIN GRID ARRAY
 SIZE: D CS
 NUMBER: M7478-0 -30
 REV: A

1.7.1

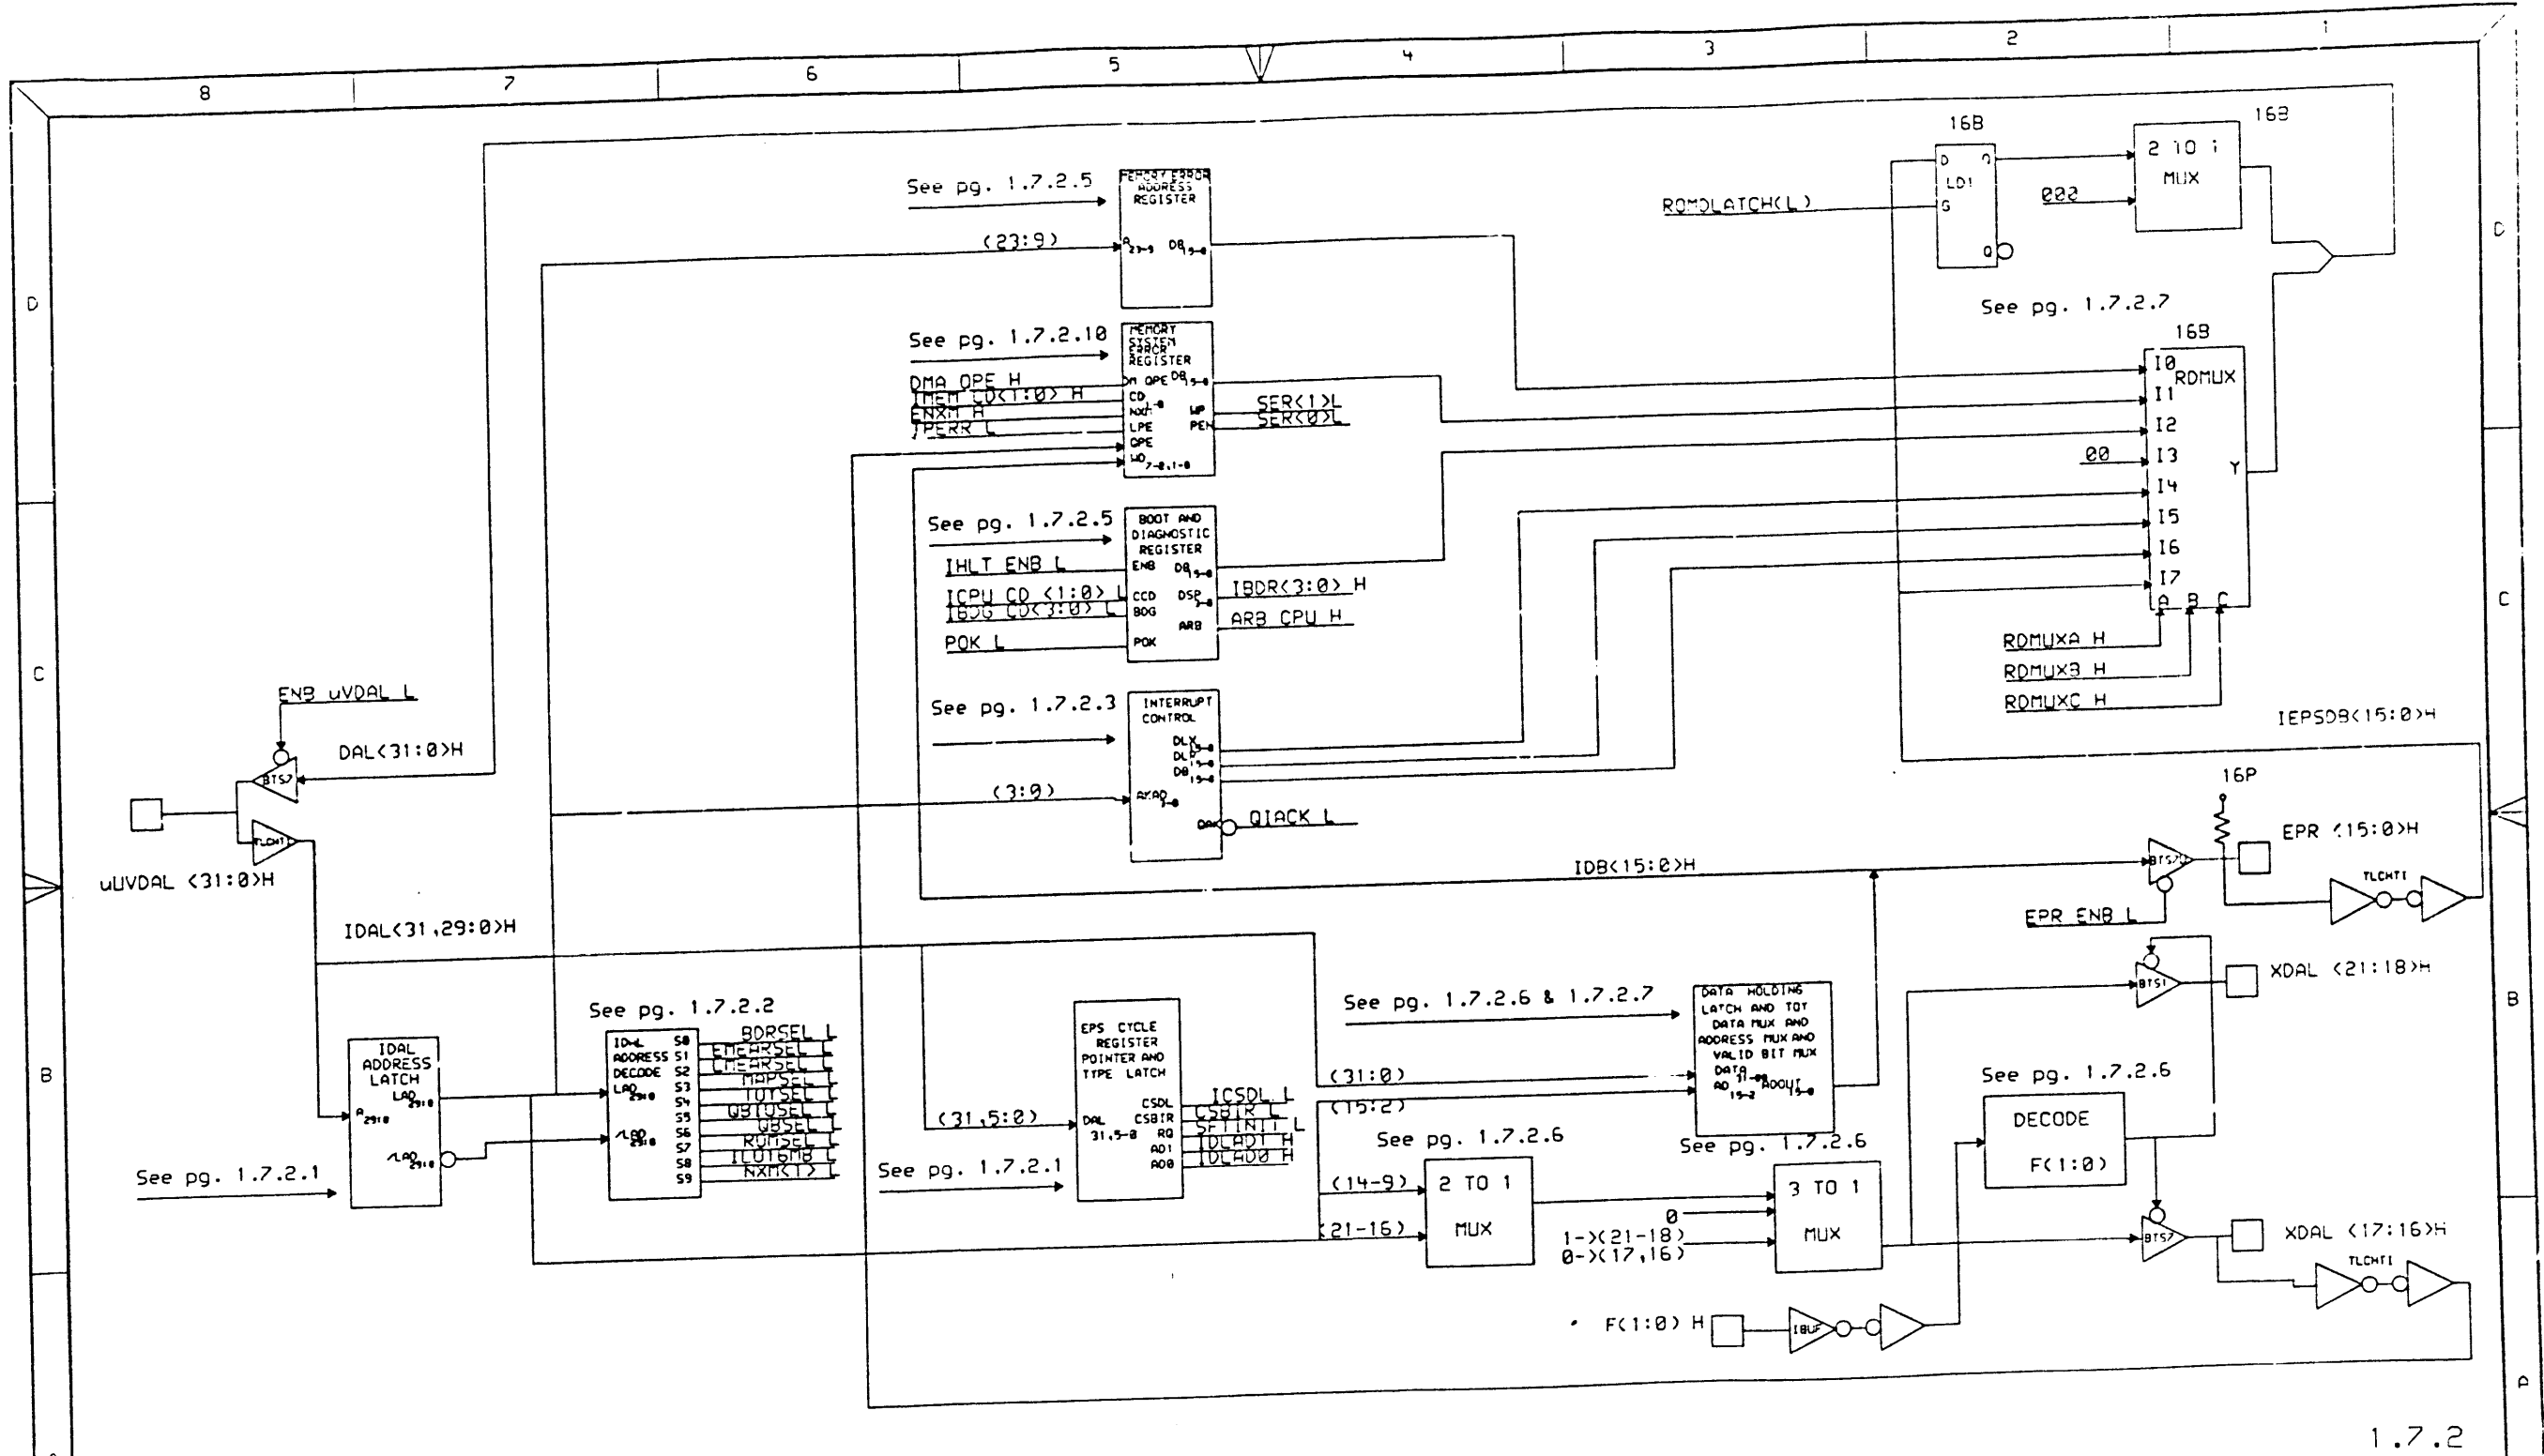

1.7.2

*THIS DRAWING AND SPECIFICATIONS, HEREIN, ARE THE PROPERTY OF DIGITAL EQUIPMENT CORPORATION AND SHALL NOT BE REPRODUCED OR COPIED OR USED IN WHOLE OR IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION.
 COPYRIGHT 1986 DIGITAL EQUIPMENT CORPORATION

REVISION HISTORY		
REV	ECO NUMBER	DATE

DRAWING
 TITLE=GA1BLOCK
 ABBREV=GA1BLOCK
 CIRCUIT+TYPE=GATE+ARRAY
 LAST+MODIFIED




DRN:
ERW
 CHK'D:
ERW

DATE
8-18-86
 DATE
8-19-86

ENG:
ERW
 SHEET 1 OF 1
 NEXT HIGHER ASSEMBLY:

DATE
8-19-86

TITLE:
uVAX Interface Gate Array
Data Path
 STAFF CODE
D | CS
 NUMBER
M7478 -0 -31
 REV
A

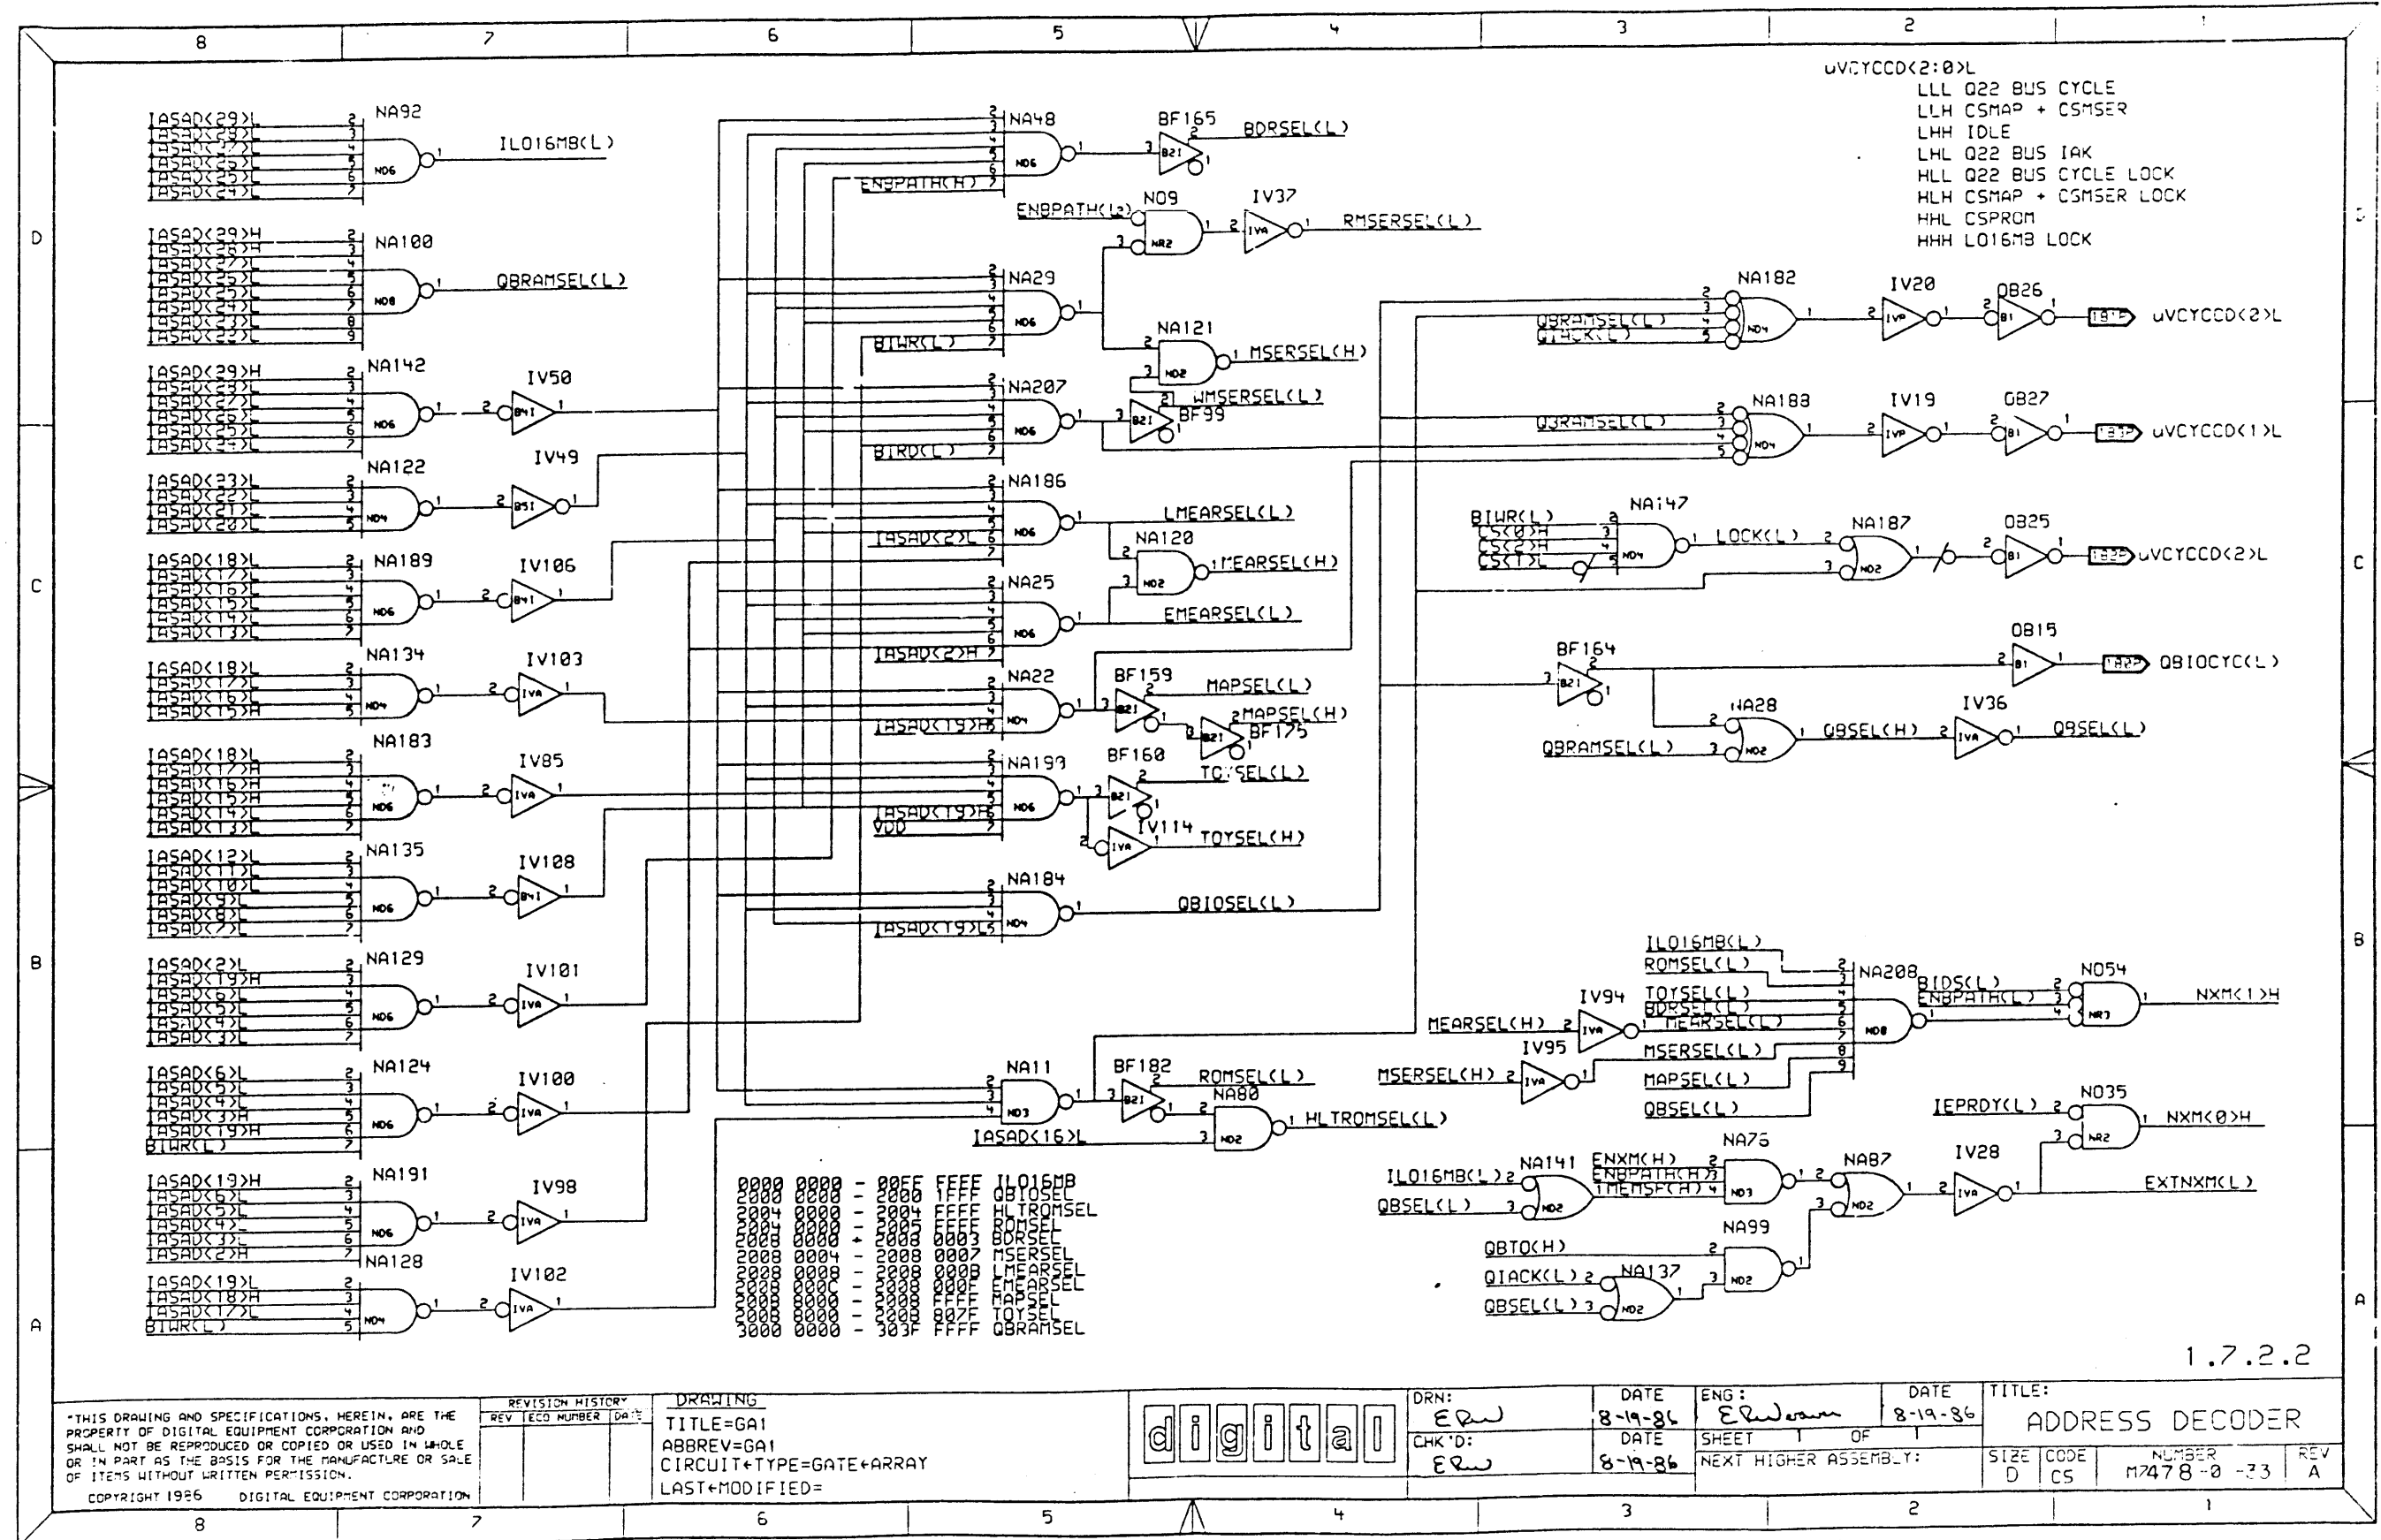

UVCYCCD<2:0>L
 LLL Q22 BUS CYCLE
 LLH CSMAP + CSMSEK
 LHM IDLE
 LHL Q22 BUS IAK
 HLL Q22 BUS CYCLE LOCK
 HLH CSMAP + CSMSEK LOCK
 HHL CSPROM
 HHH L016MB LOCK

0000	0000	-	00FF	FFFF	I/O16MB
0000	0000	-	2000	1FFF	QBIOSSEL
0004	0000	-	2004	1FFF	HLTROMSEL
0004	0000	-	2007	1FFF	ROMSEL
0008	0000	-	2008	0003	QBRAMSEL
0008	0004	-	2008	0007	MSERSEL
0008	0008	-	2008	000B	LMSEARSEL
0008	000C	-	2008	000D	EMSEARSEL
0008	0000	-	2008	000F	MAPSEL
0008	0000	-	2008	001F	TOYSEL
0000	0000	-	303F	FFFF	QBRAMSEL

"THIS DRAWING AND SPECIFICATIONS, HEREIN, ARE THE PROPERTY OF DIGITAL EQUIPMENT CORPORATION AND SHALL NOT BE REPRODUCED OR COPIED OR USED IN WHOLE OR IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION."
 COPYRIGHT 1986 DIGITAL EQUIPMENT CORPORATION

REVISION HISTORY		
REV	ECO NUMBER	DATE


DRAWING
 TITLE=GA1
 ABBREV=GA1
 CIRCUIT+TYPE=GATE+ARRAY
 LAST+MODIFIED=



DRN:	DATE	ENG:	DATE	TITLE:
EW	8-19-86	ELW	8-19-86	ADDRESS DECODER
CHK'D:	DATE	SHEET	OF	
EW	8-19-86			

NEXT HIGHER ASSEMBLY:	SIZE	CODE	NUMBER	REV
	D	CS	M7478-0-33	A

1.7.2.2

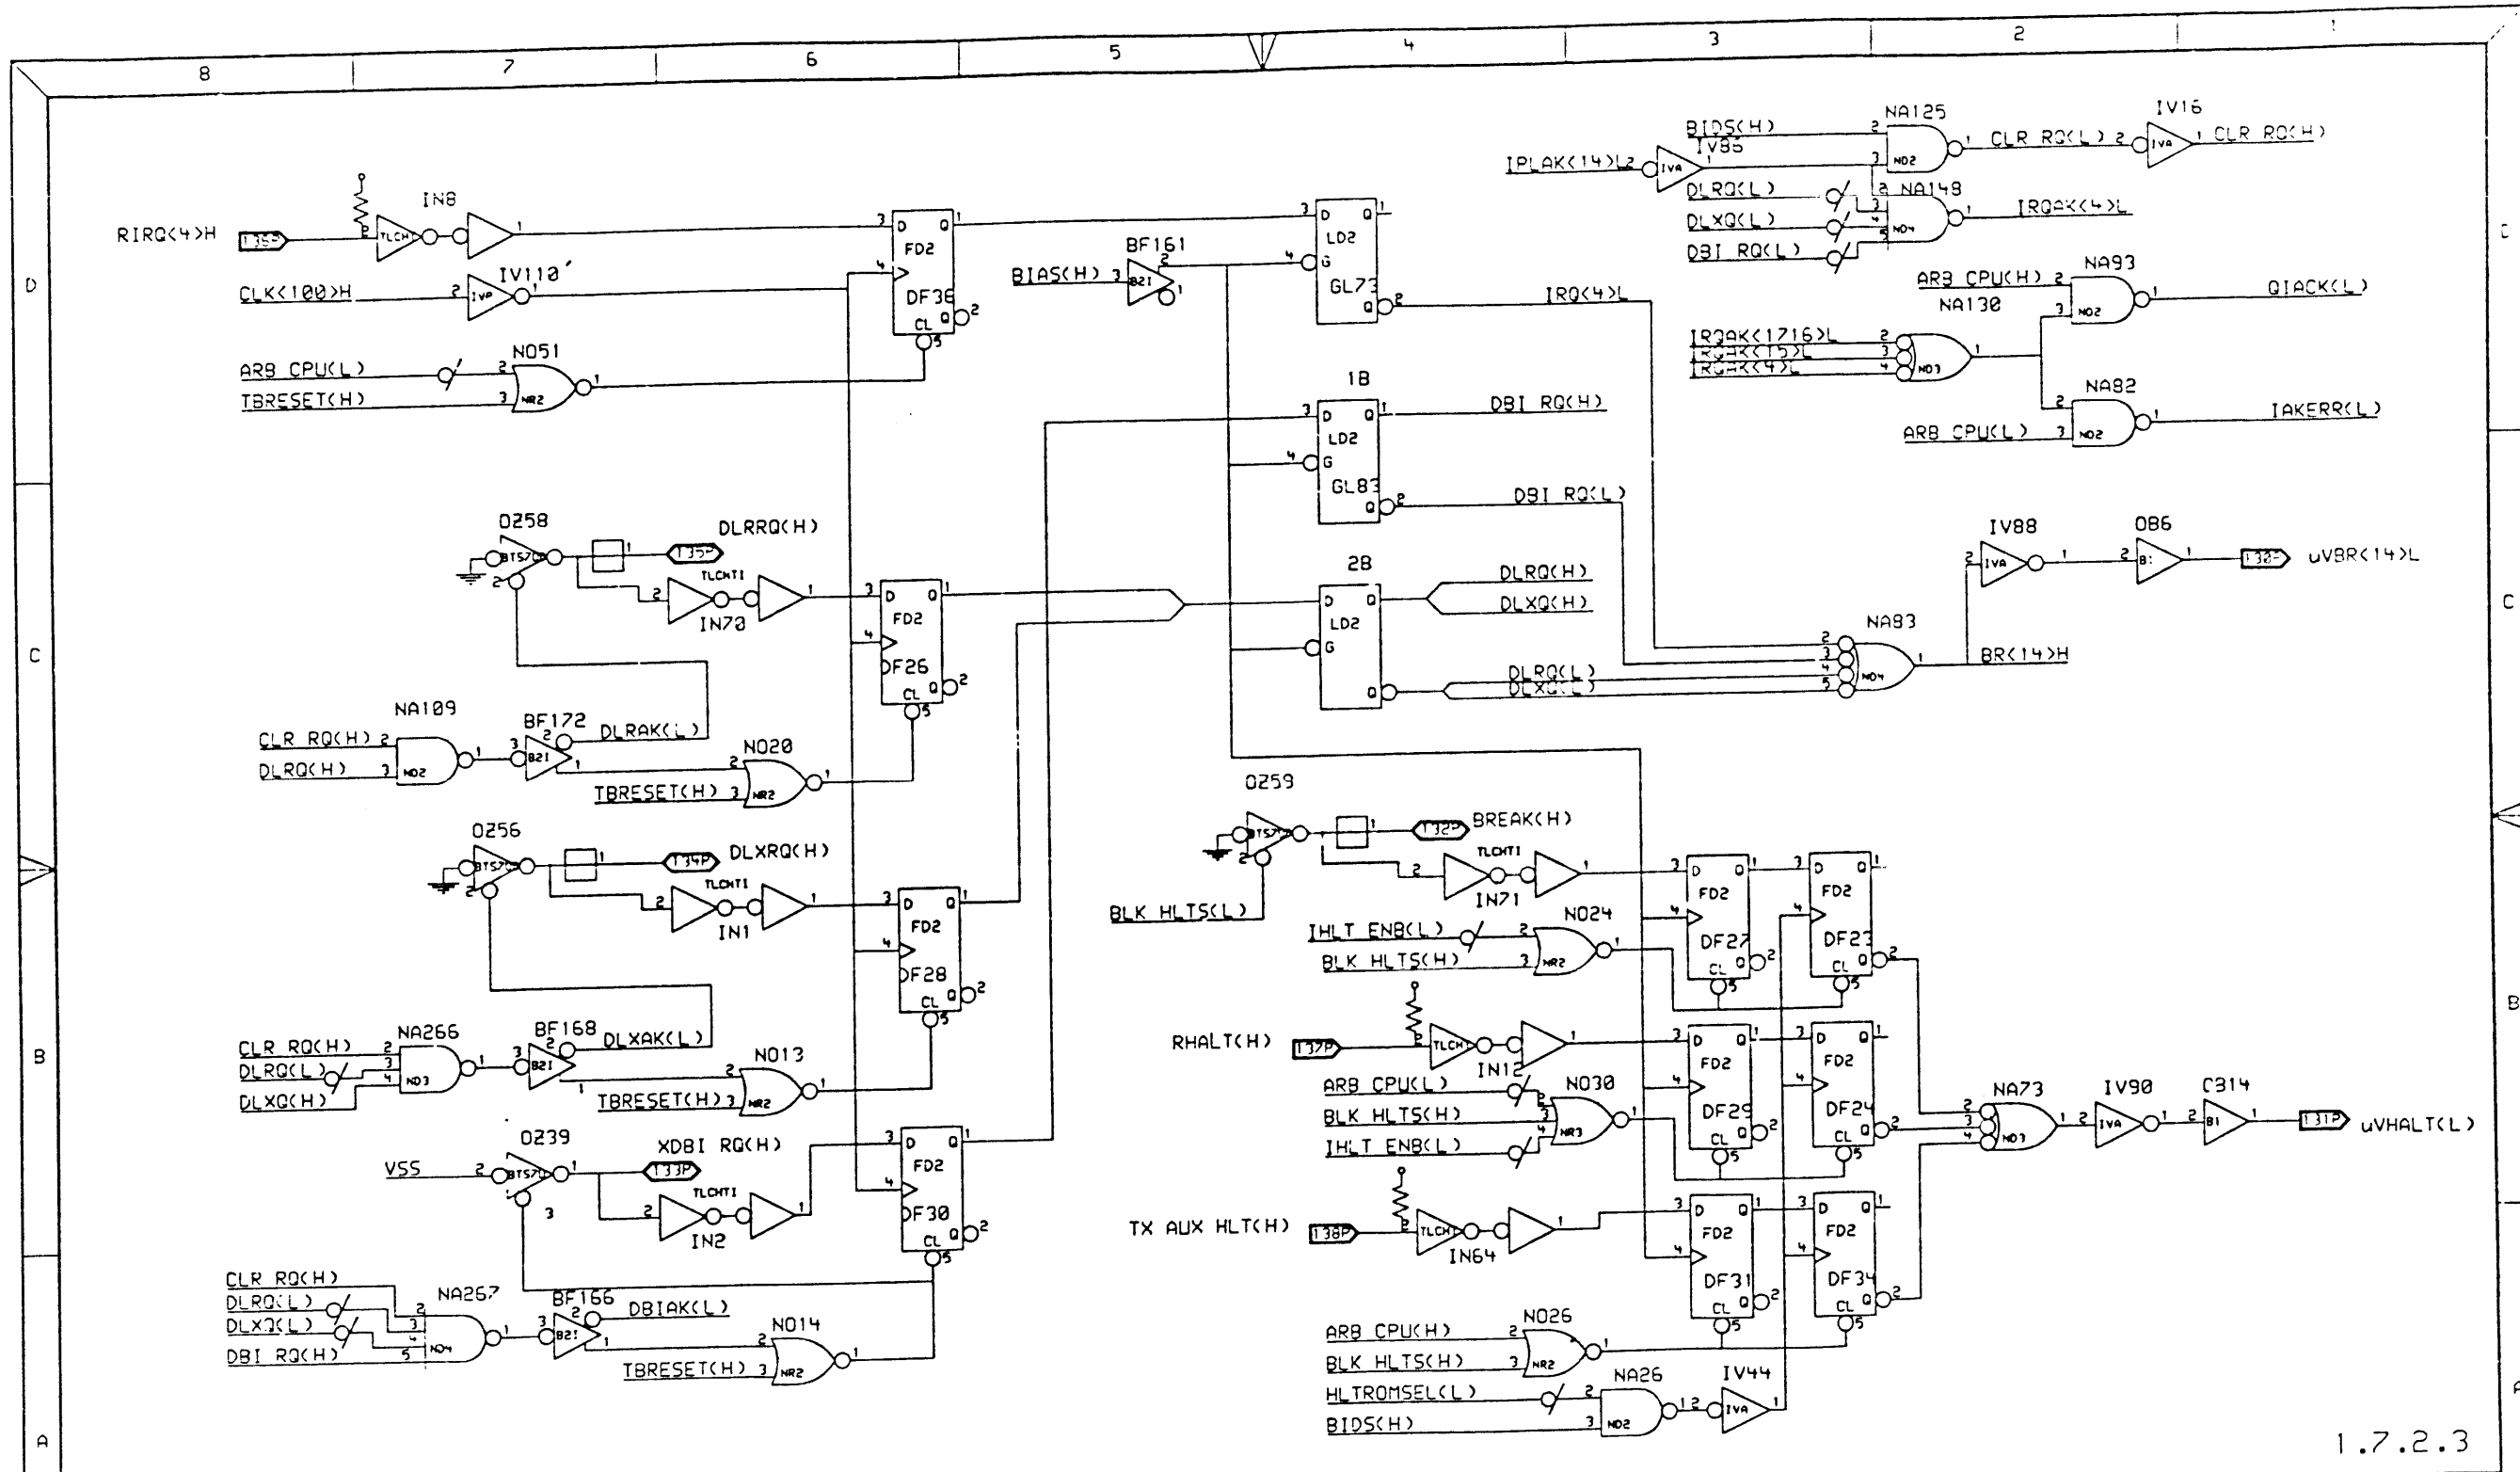

1.7.2.3


*THIS DRAWING AND SPECIFICATIONS, HEREIN, ARE THE PROPERTY OF DIGITAL EQUIPMENT CORPORATION AND SHALL NOT BE REPRODUCED OR COPIED OR USED IN WHOLE OR IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION.
 COPYRIGHT 1986 DIGITAL EQUIPMENT CORPORATION

REVISION HISTORY		
REV	ECO NUMBER	DATE

DRAWING
 TITLE=GAI
 ABBREV=GAI
 CIRCUIT+TYPE=GATE+ARRAY
 LAST+MODIFIED=



DRN: ERW	DATE 8-19-86	ENG: E. W. ...	DATE 8-19-86	TITLE: EXCEPTIONS AND INTERRUPTS
CHK'D: ERW	DATE 8-19-86	SHEET 1 OF 1	NEXT HIGHER ASSEMBLY:	SIZE CODE D CS
			NUMBER M7478-0 -34	REV A

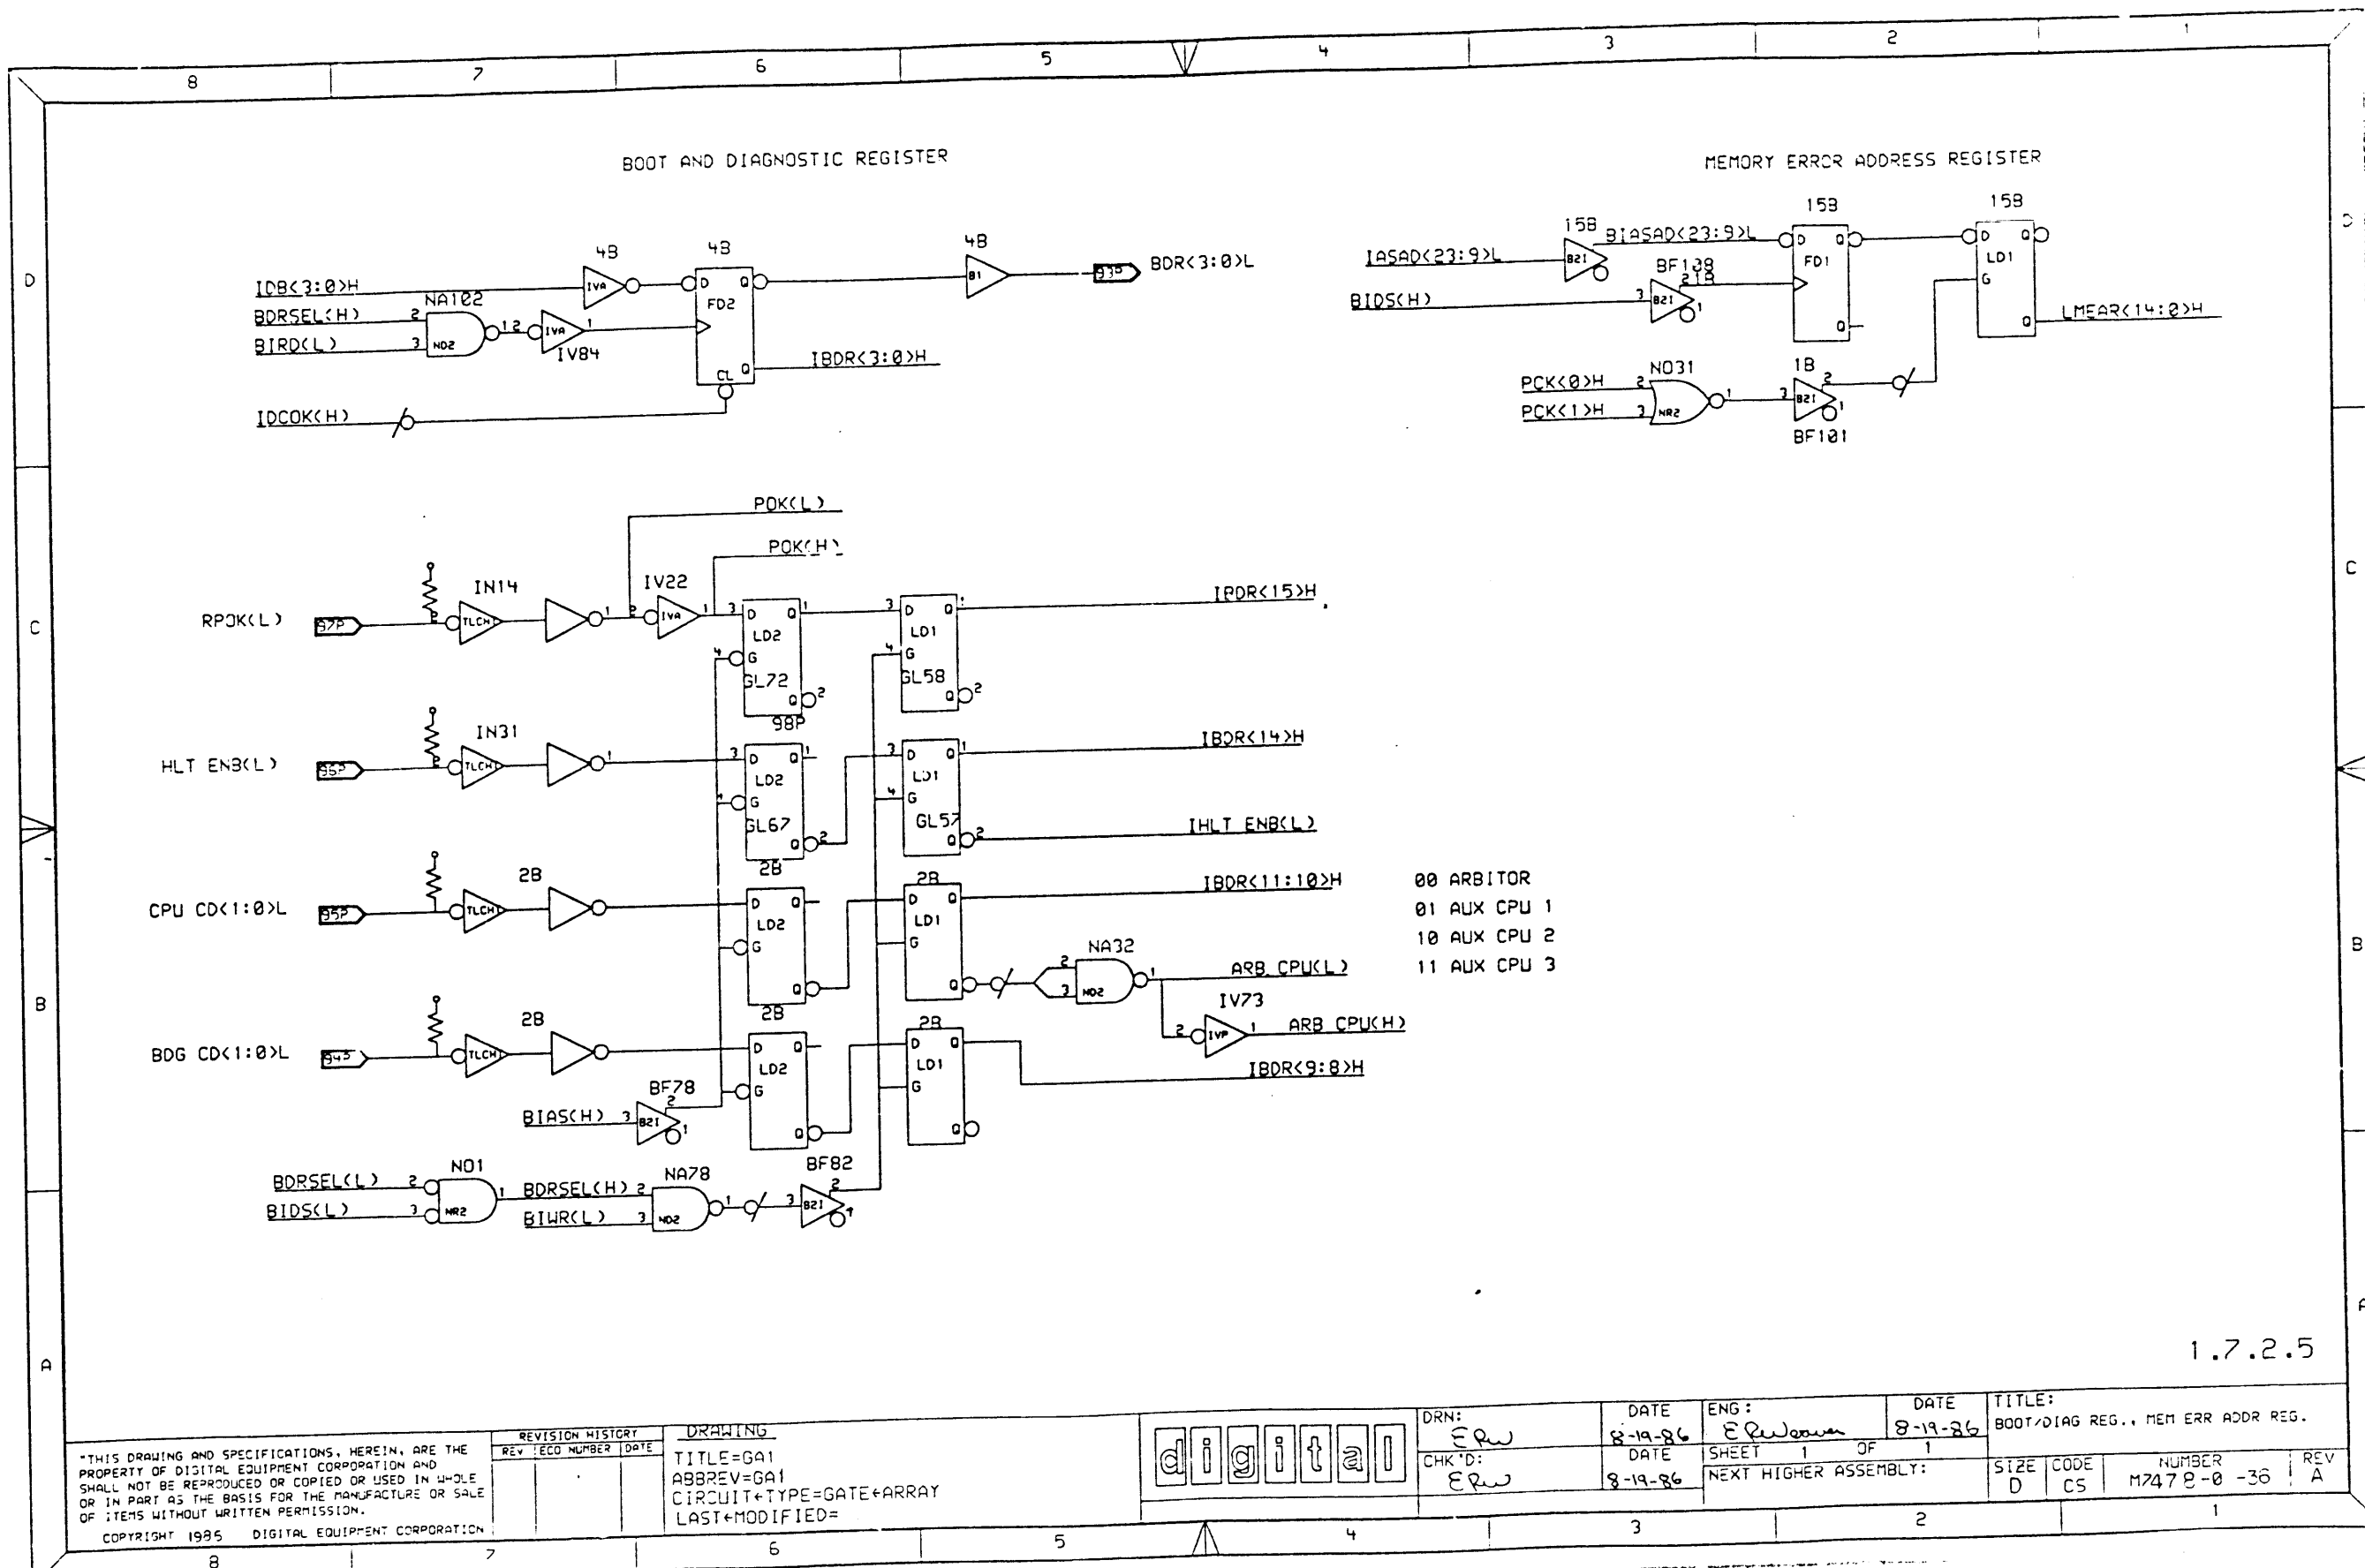


- 00 ARBITOR
- 01 AUX CPU 1
- 10 AUX CPU 2
- 11 AUX CPU 3

1.7.2.5


*THIS DRAWING AND SPECIFICATIONS, HEREIN, ARE THE PROPERTY OF DIGITAL EQUIPMENT CORPORATION AND SHALL NOT BE REPRODUCED OR COPIED OR USED IN WHOLE OR IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION.

REVISION HISTORY		
REV	ECO NUMBER	DATE

DRAWING
 TITLE=GA1
 ABBREV=GA1
 CIRCUIT+TYPE=GATE+ARRAY
 LAST+MODIFIED=



DRN: ERW	DATE 8-19-86	ENG: E. W. J. J.	DATE 8-19-86	TITLE: BOOT/DIAG REG., MEM ERR ADDR REG.
CHK'D: ERW	DATE 8-19-86	SHEET 1 OF 1		SIZE CODE NUMBER REV D C5 M7478-0 -36 A
NEXT HIGHER ASSEMBLY:				

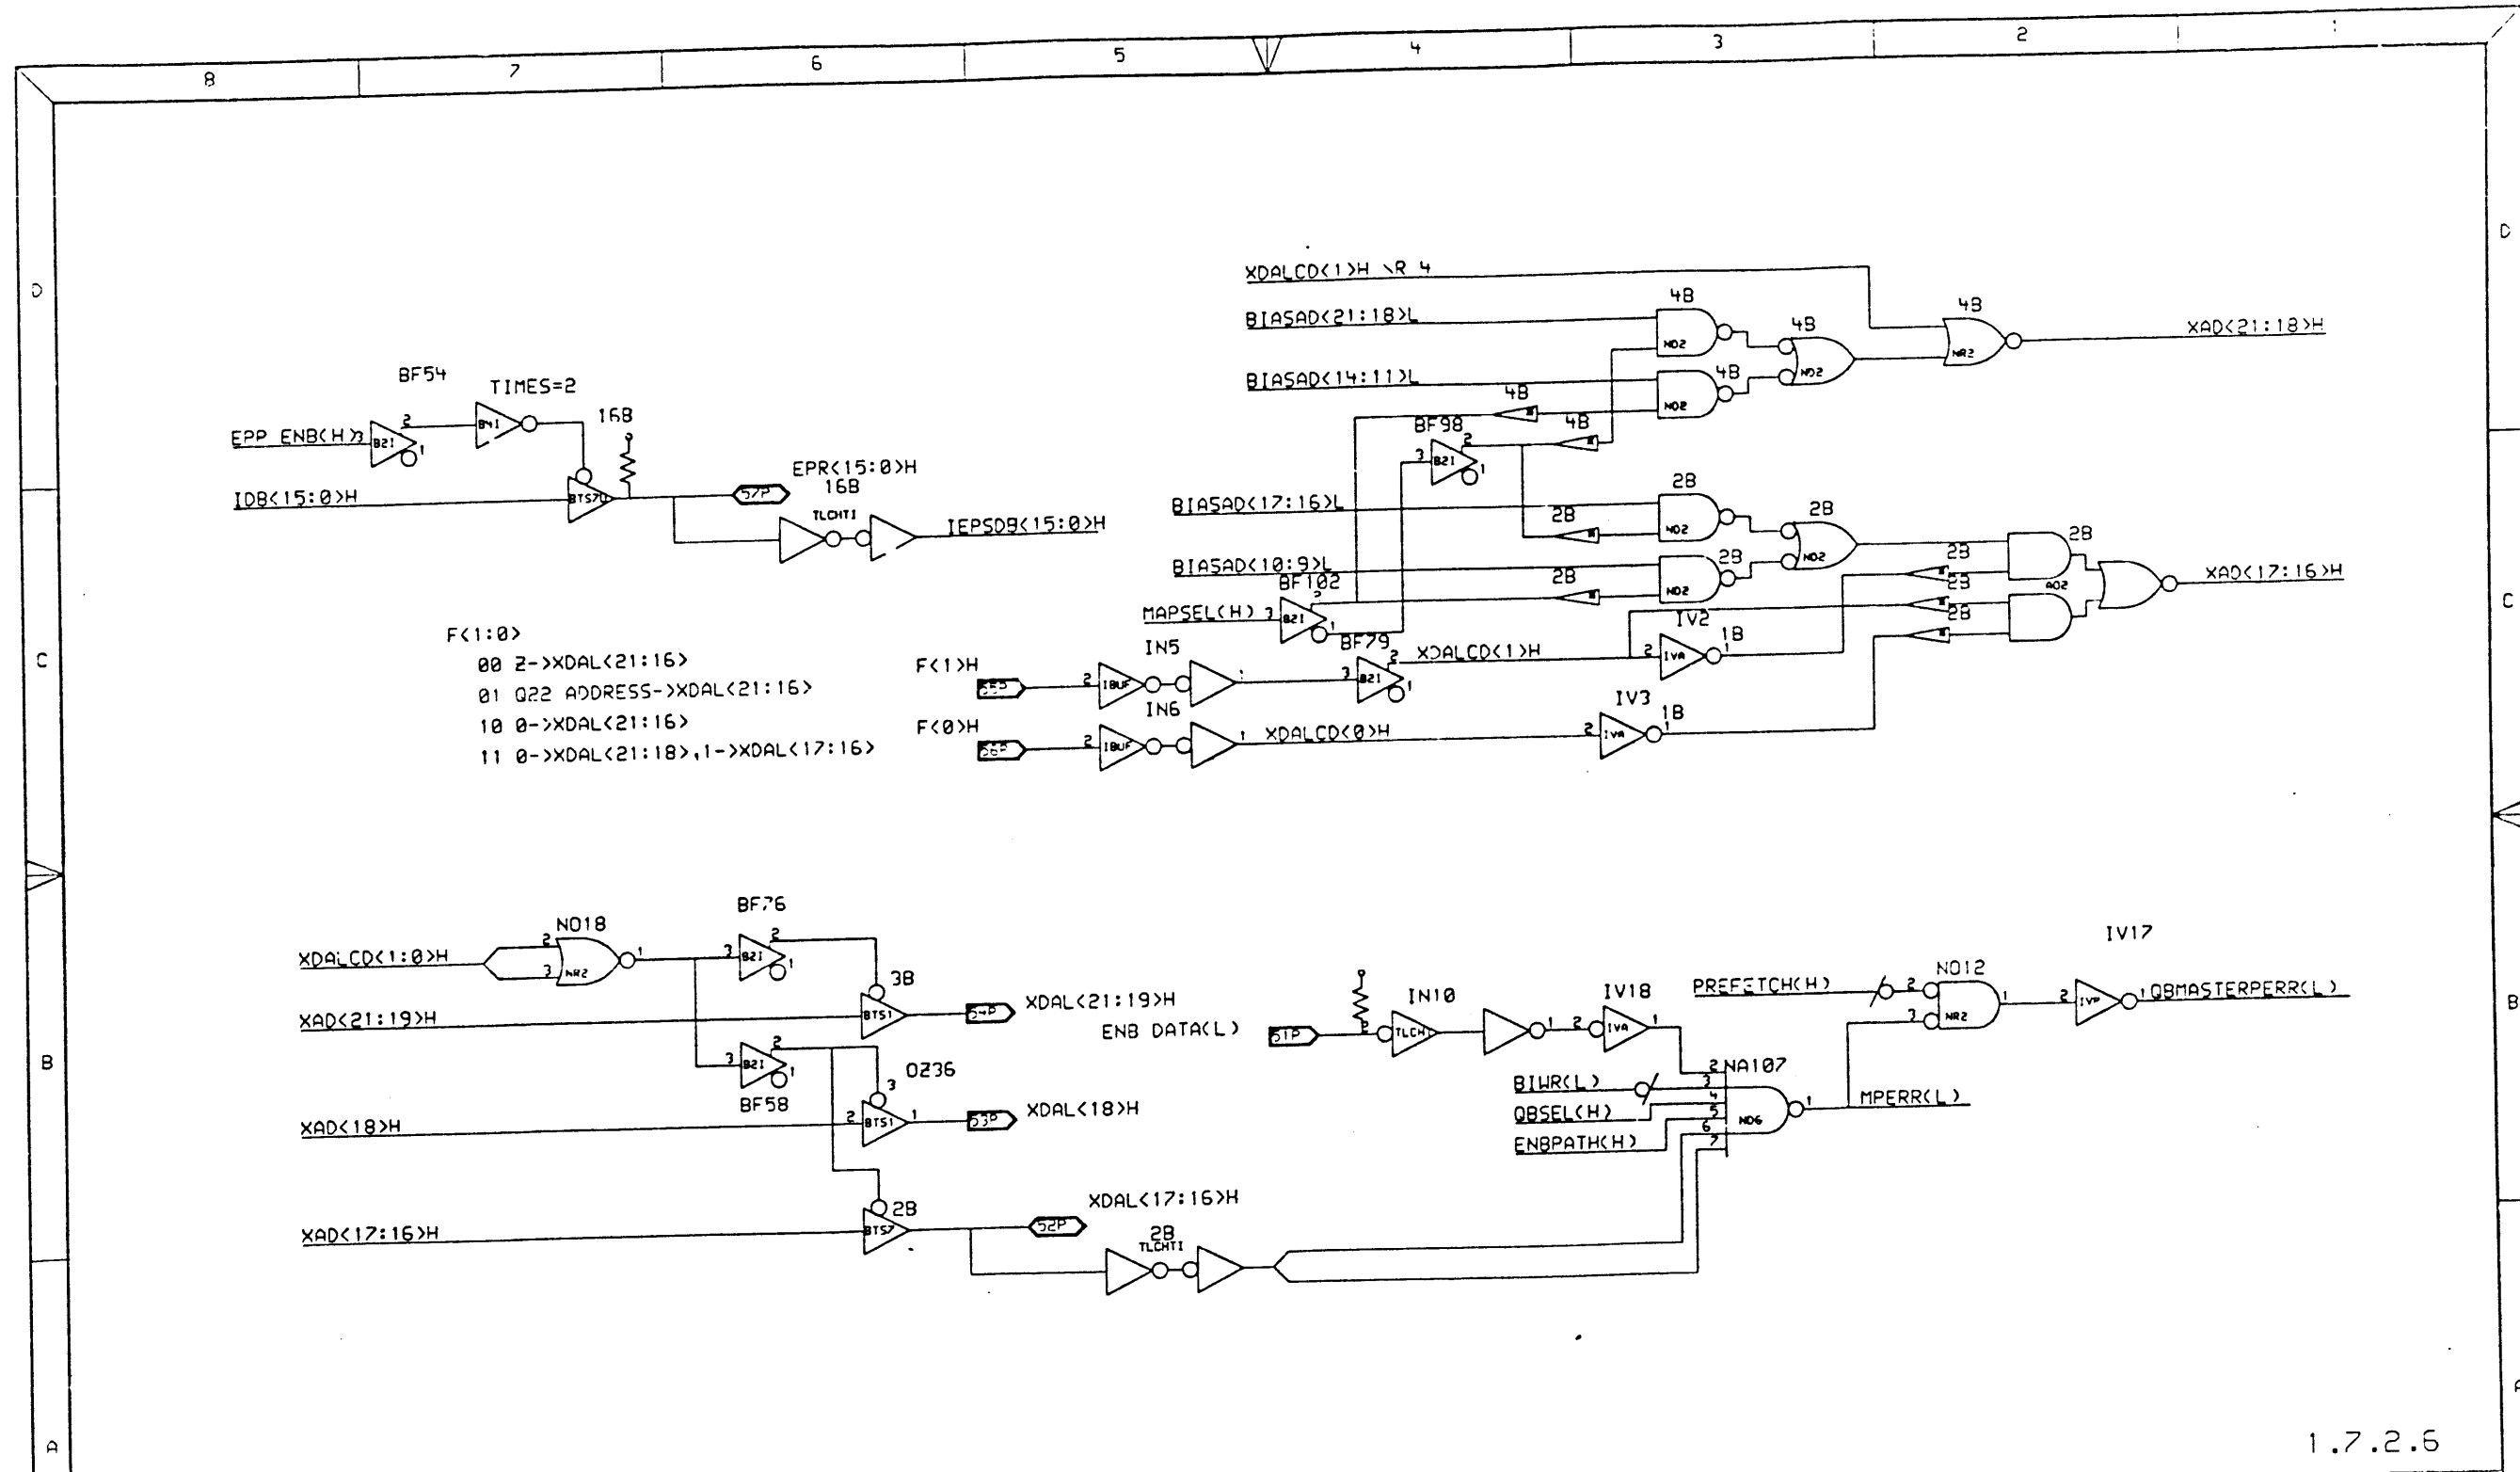

1.7.2.6


*THIS DRAWING AND SPECIFICATIONS, HEREIN, ARE THE PROPERTY OF DIGITAL EQUIPMENT CORPORATION AND SHALL NOT BE REPRODUCED OR COPIED OR USED IN WHOLE OR IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION.
 COPYRIGHT 1986 DIGITAL EQUIPMENT CORPORATION

REVISION HISTORY		
REV	ECO NUMBER	DATE

DRAWING
 TITLE=GA1
 ABBREV=GA1
 CIRCUIT+TYPE=GATE+ARRAY
 LAST+MODIFIED=NOT WRITTEN



DRN: ERW	DATE 8-19-86	ENG: ERW	DATE 8-11-86	TITLE: EPR BUS, XDAL BUS
CHK'D: ERW	DATE 8-19-86	SHEET 1	OF 1	SIZE D
NEXT HIGHER ASSEMBLY:			CODE CS	NUMBER M7473-0 -37
				REV A

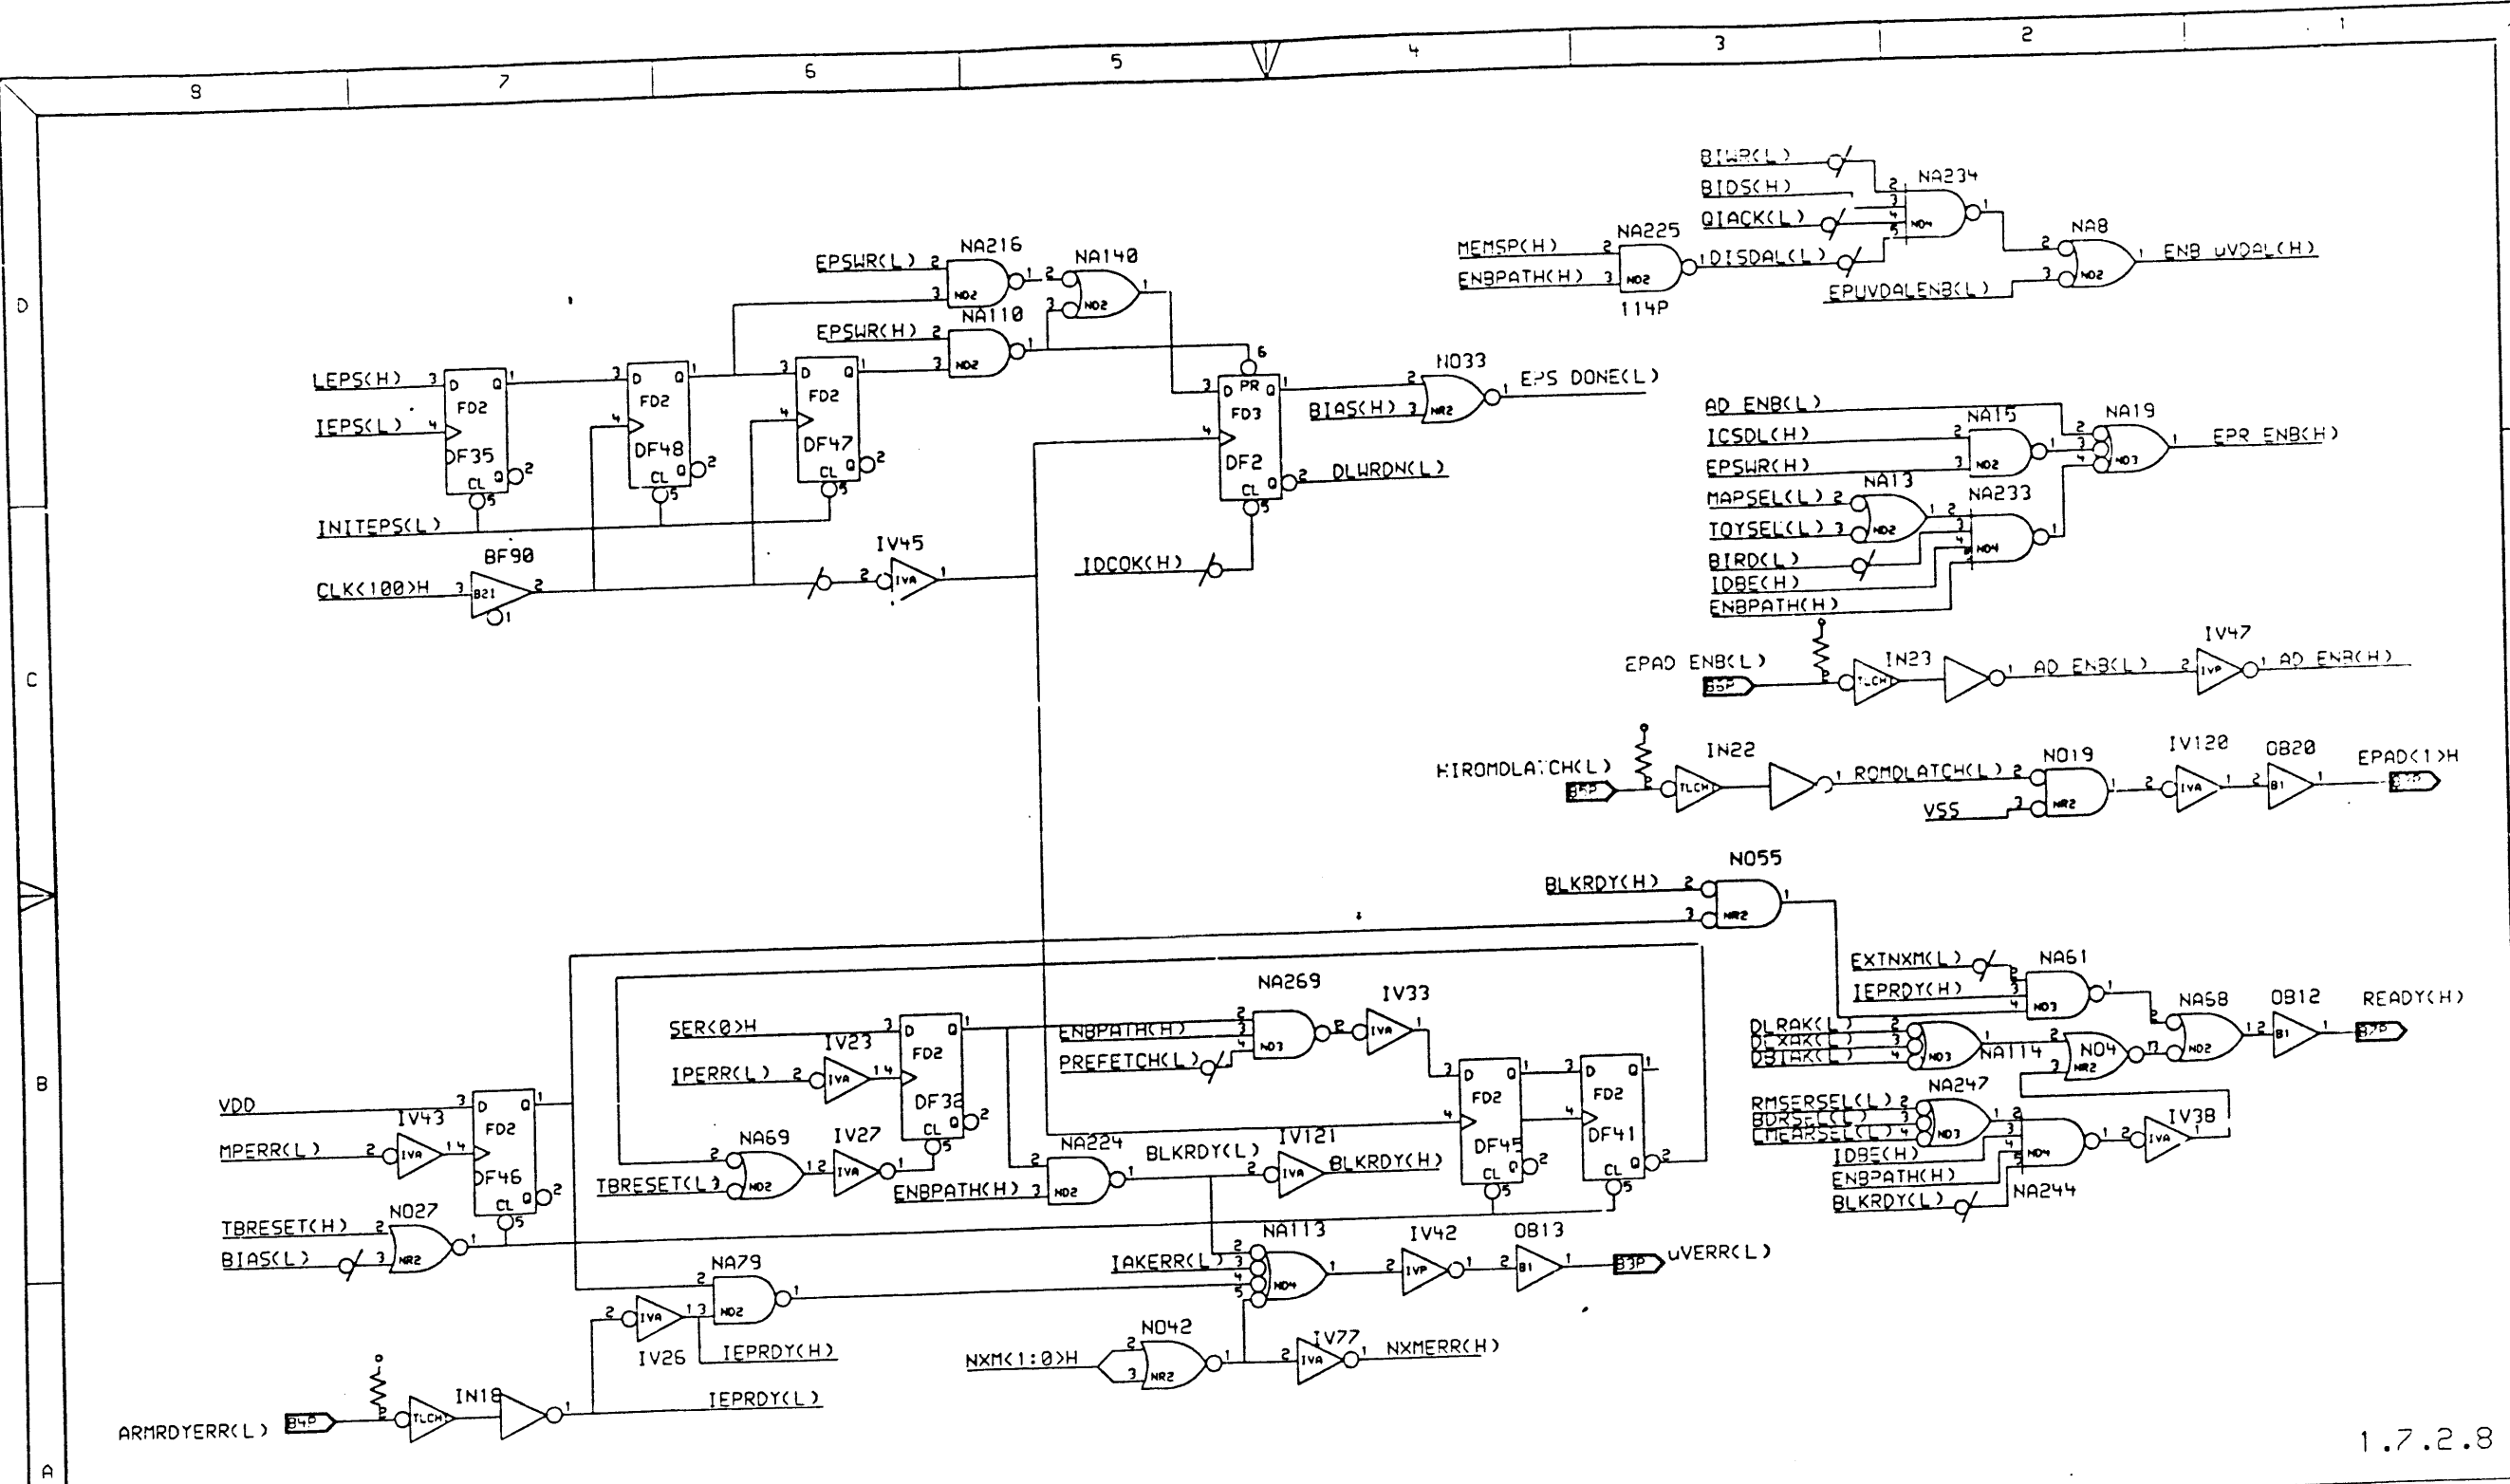

1.7.2.8


THIS DRAWING AND SPECIFICATIONS, HEREIN, ARE THE PROPERTY OF DIGITAL EQUIPMENT CORPORATION AND SHALL NOT BE REPRODUCED OR COPIED OR USED IN WHOLE OR IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION.
 COPYRIGHT 1985 DIGITAL EQUIPMENT CORPORATION

REVISION HISTORY		
REV	ECO NUMBER	DATE

DRAWING
 TITLE=GA1
 ABBREV=GA1
 CIRCUIT+TYPE=GATE+ARRAY
 LAST+MODIFIED



DRN: ERW	DATE 8-19-86	ENG: E. J. Egan	DATE 8-19-86	TITLE: MISC. CONTROL SIGNALS
CHK'D: ERW	DATE 8-19-86	SHEET 1	OF 1	STRE CODE D CS
NEXT HIGHER ASSEMBLY:			NUMBER M7478-0-09	REV A

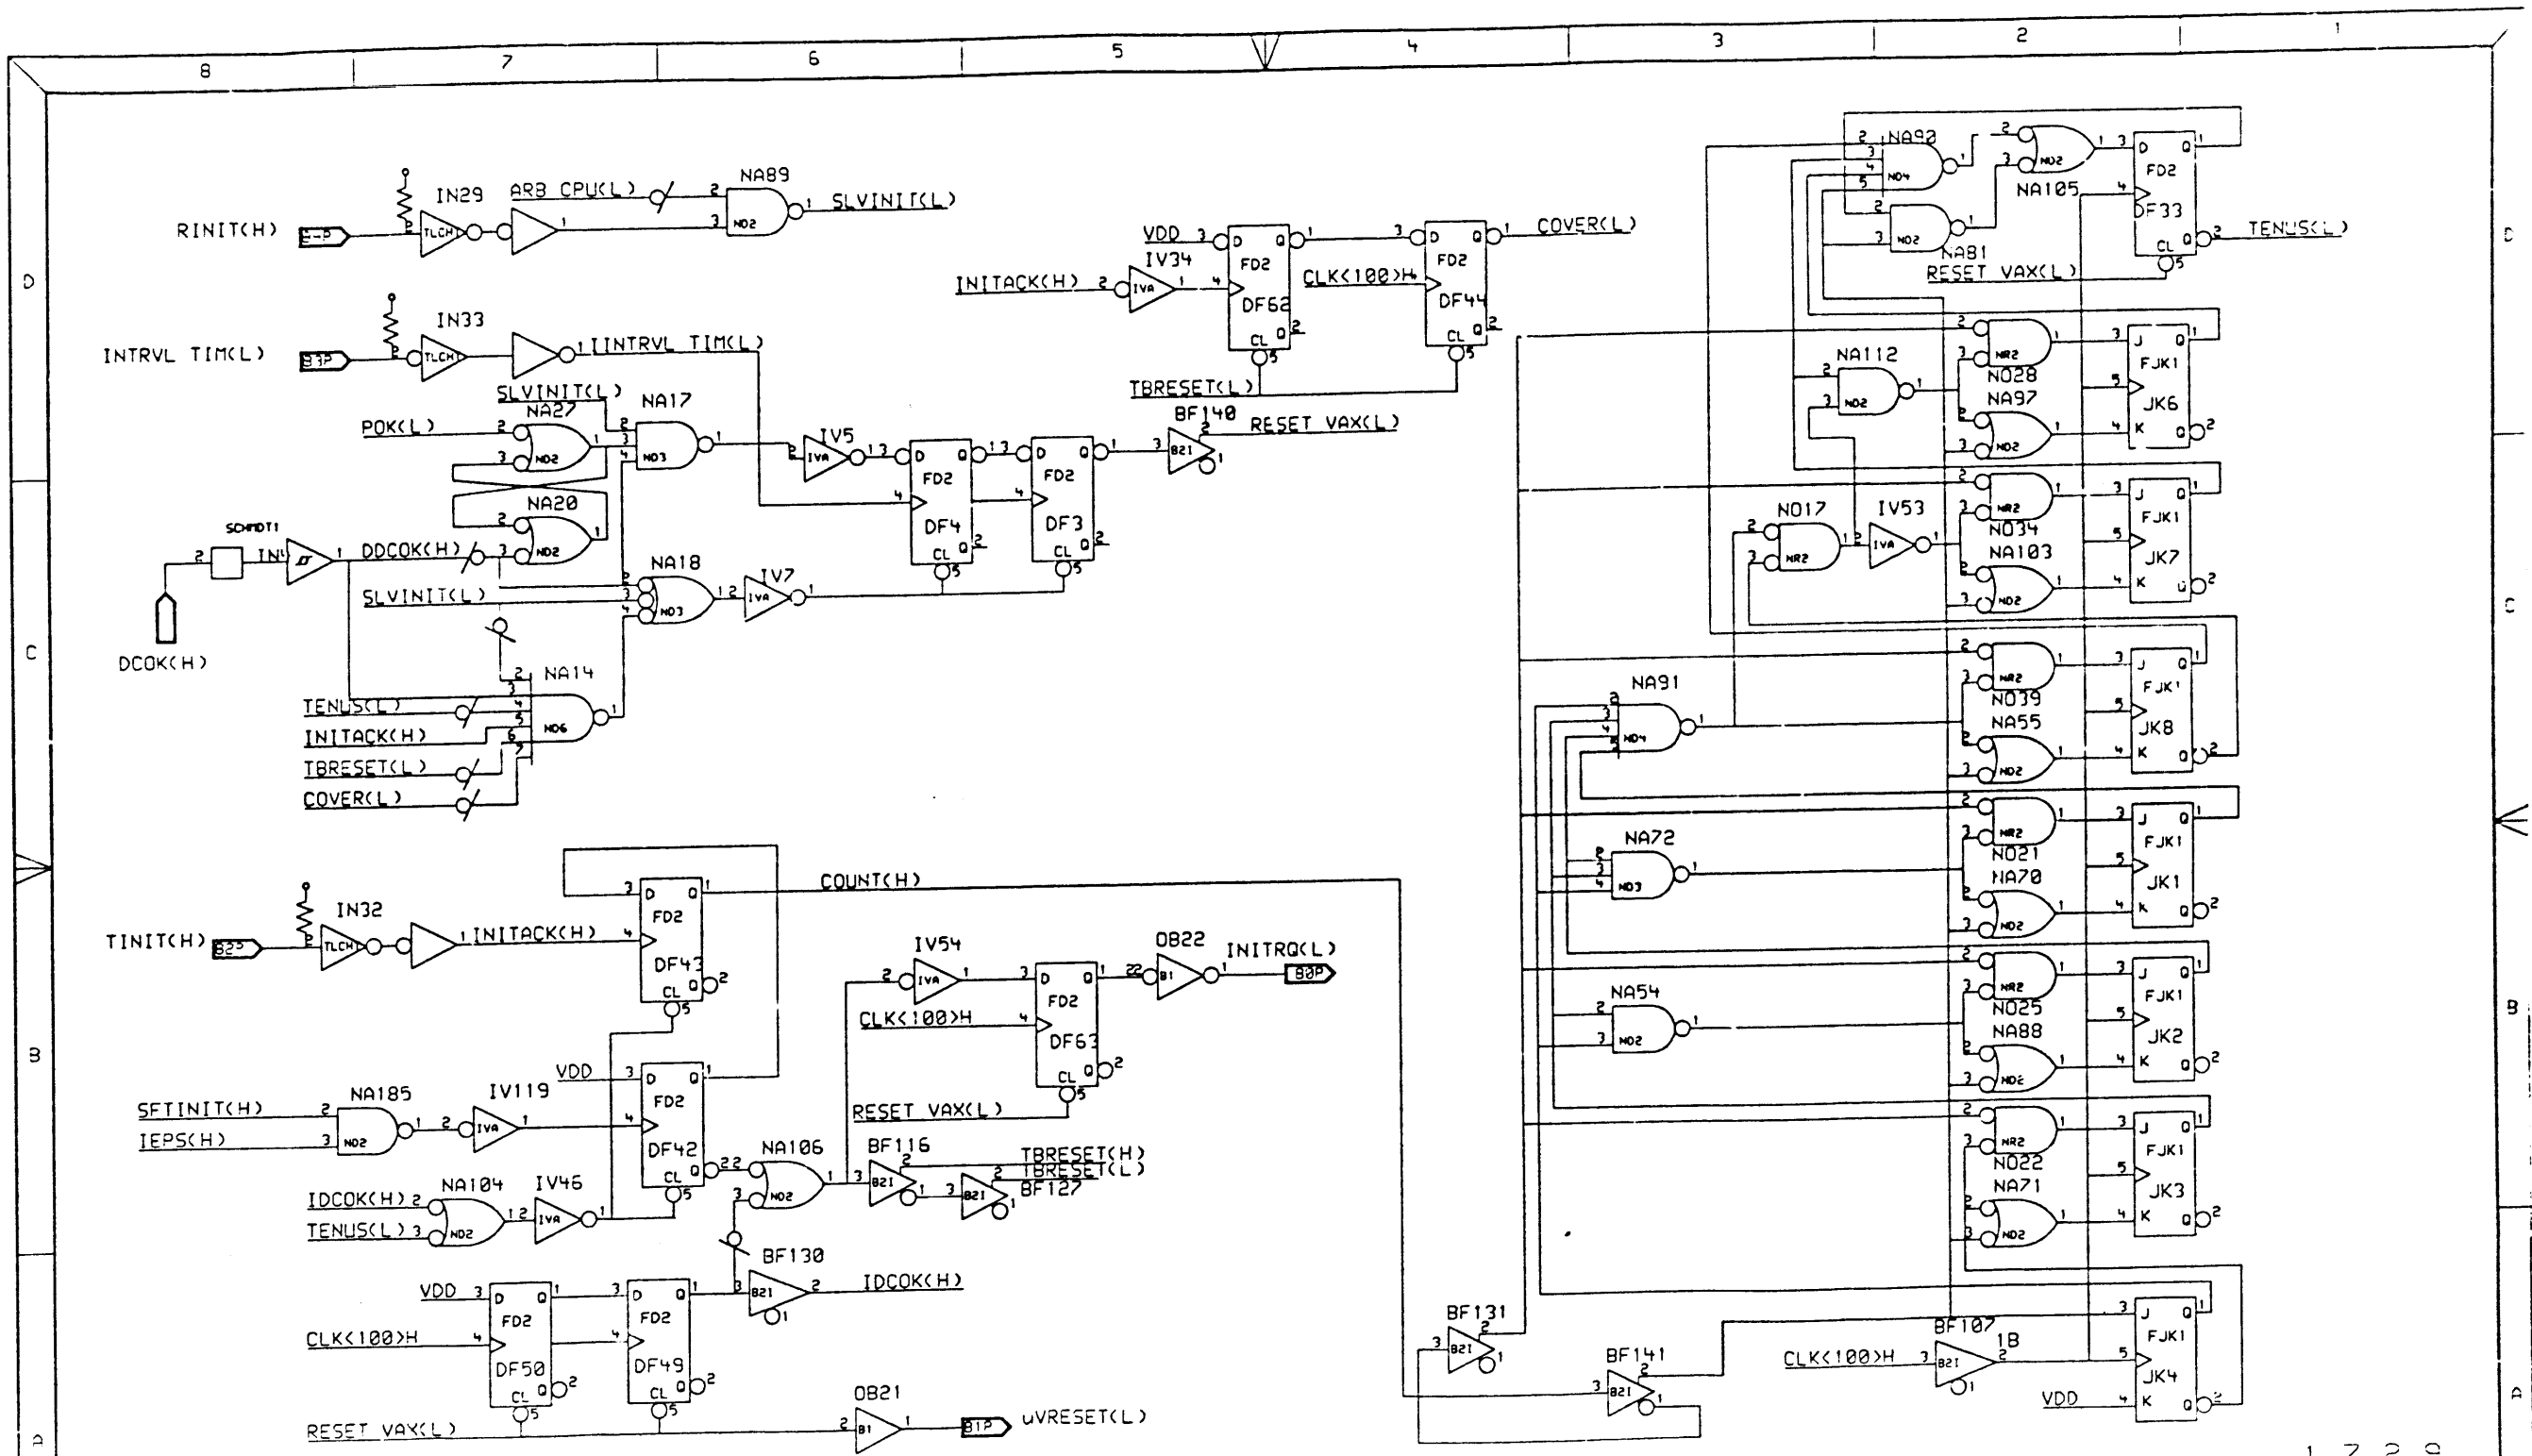

1.7.2.9

*THIS DRAWING AND SPECIFICATIONS, HEREIN, ARE THE PROPERTY OF DIGITAL EQUIPMENT CORPORATION AND SHALL NOT BE REPRODUCED OR COPIED OR USED IN WHOLE OR IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION.
 COPYRIGHT 1986 DIGITAL EQUIPMENT CORPORATION

REVISION HISTORY		
REV	ISSUED	DATE


DRAWING
 TITLE=GA1
 ABBREV=GA1
 CIRCUIT+TYPE=GATE+ARRAY
 LAST+MODIFIED=



DRN: EW
 CHK'D: EW
 DATE: 8-19-86

ENG: E. Warner
 DATE: 8-19-86
 SHEET 1 OF 1
 NEXT HIGHER ASSEMBLY:

TITLE:		NUMBER		REV
RESET COUNTER, POWER UP/DOWN CNTRL		M7478-0 -40		A

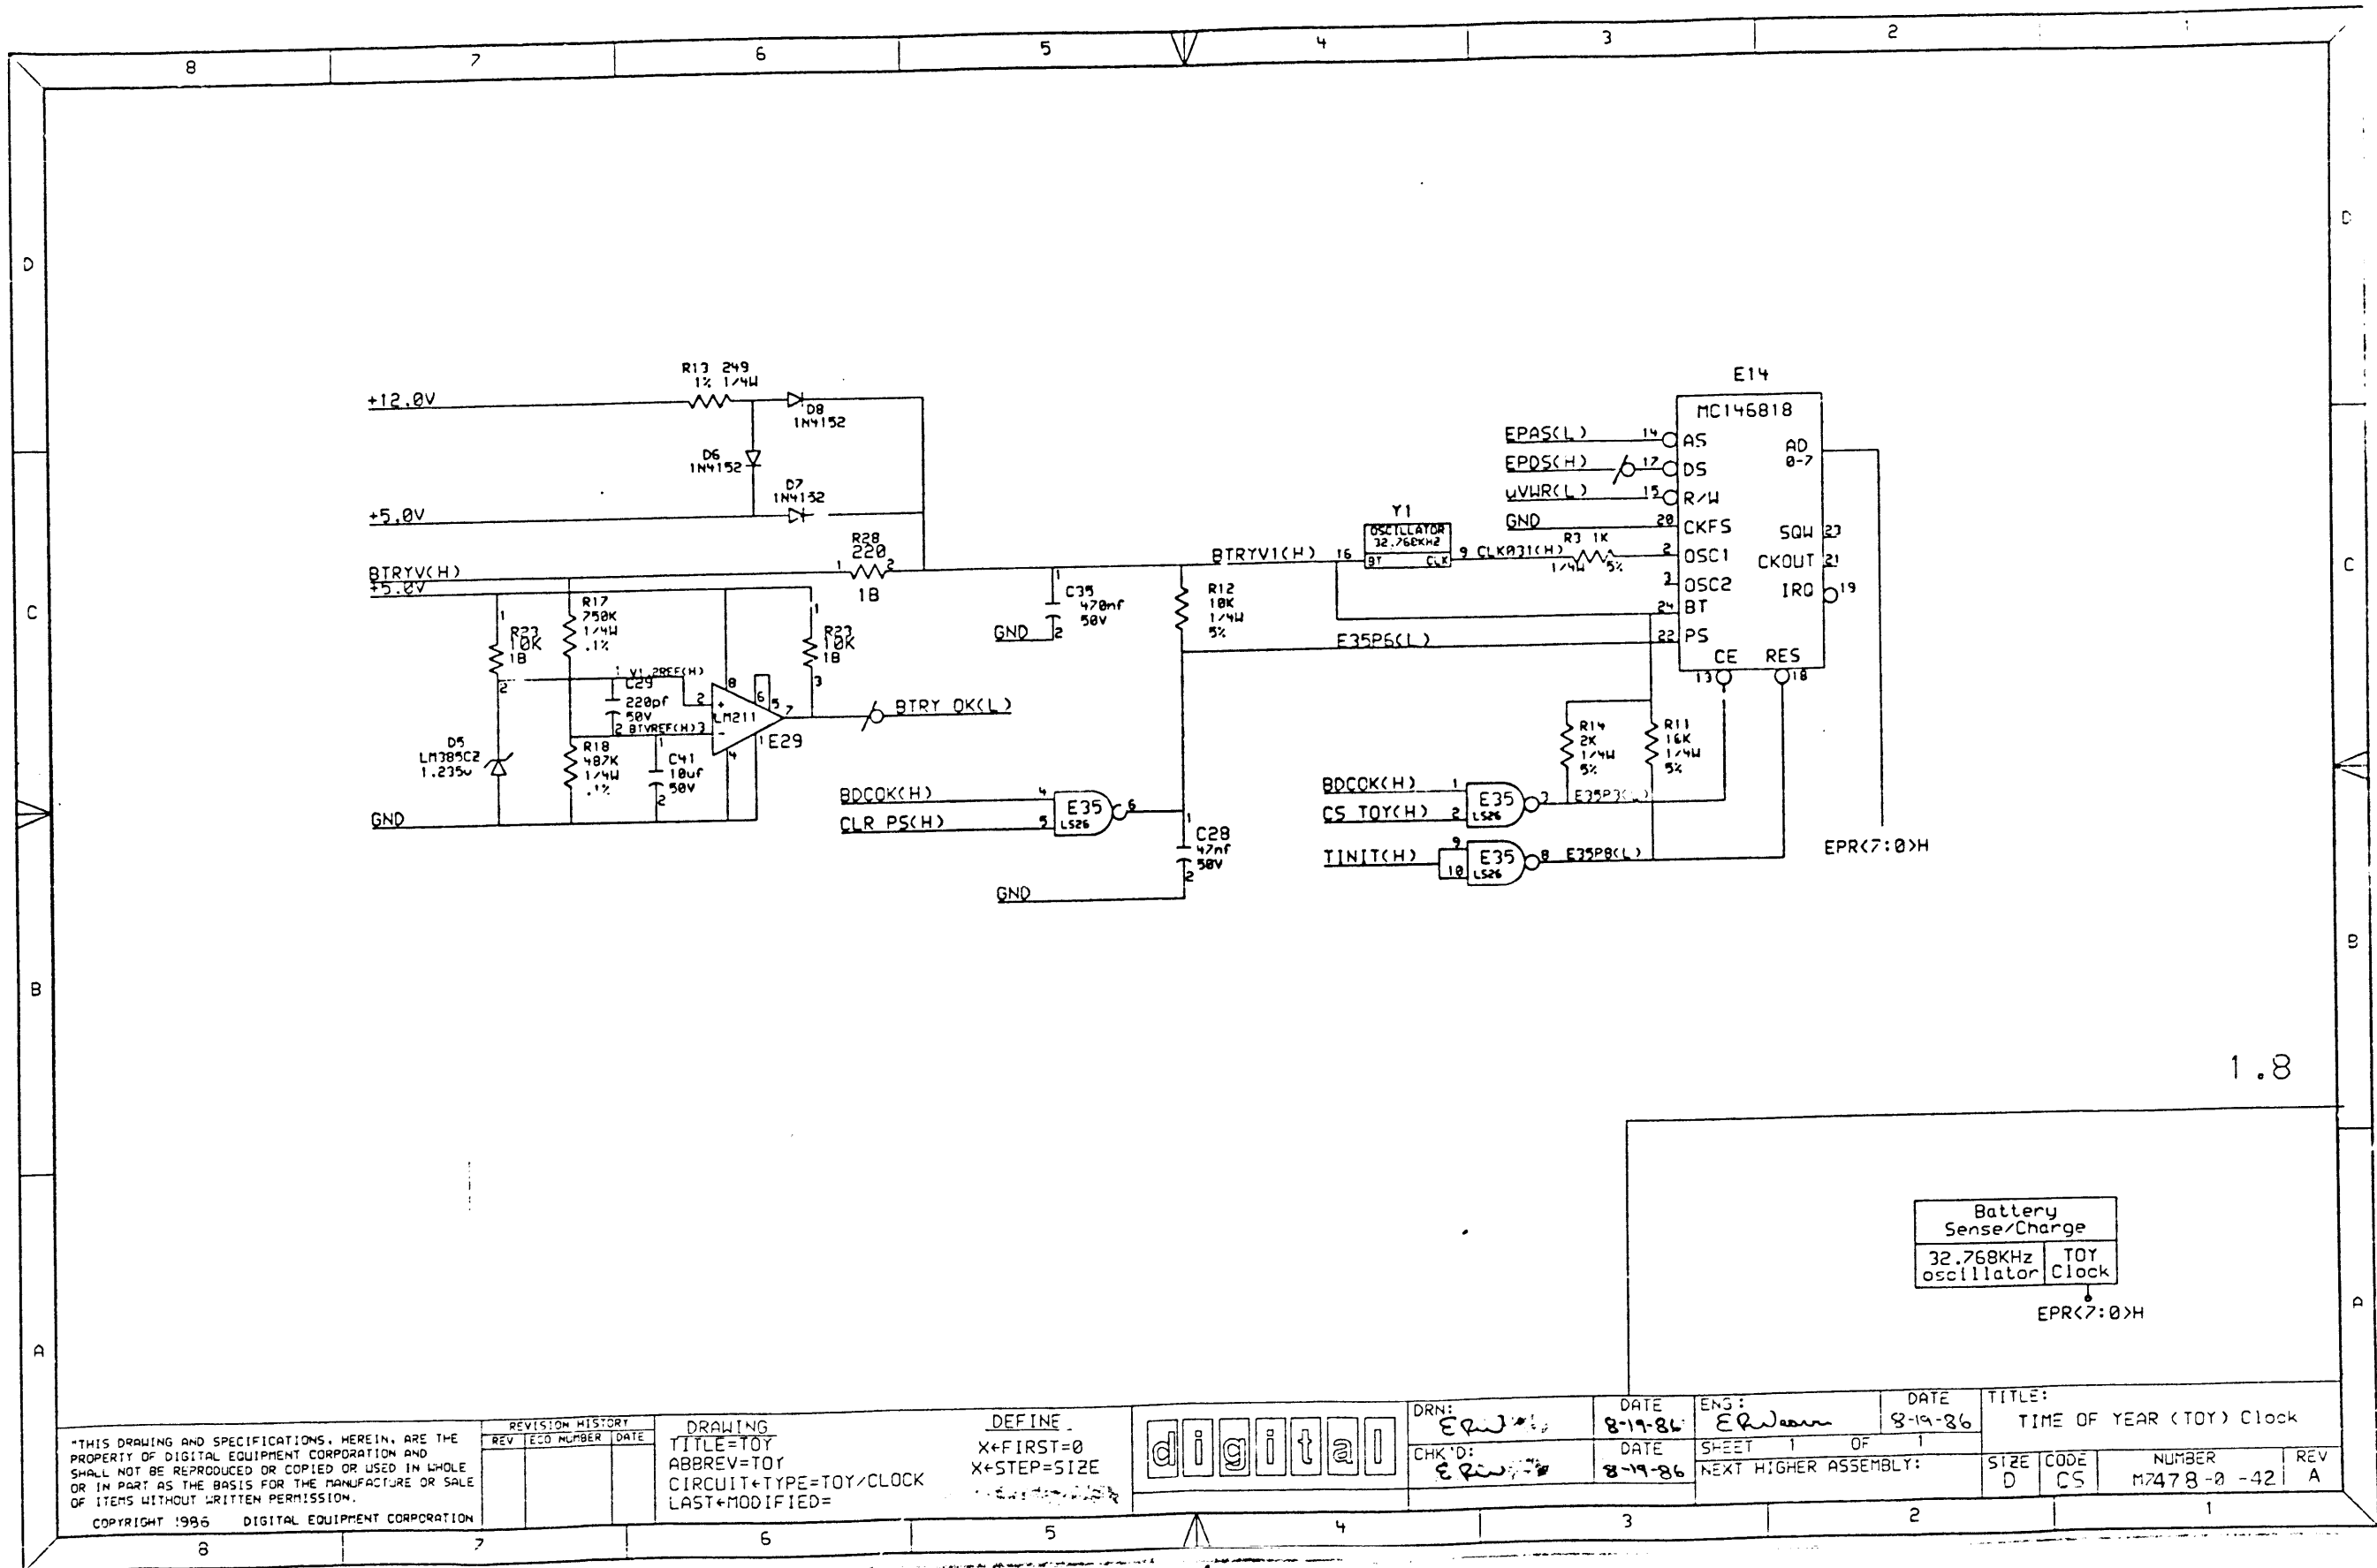

1.8


Battery Sense/Charge
 32.768KHz TOY oscillator
 TOY Clock
 EPR<7:0>H

"THIS DRAWING AND SPECIFICATIONS, HEREIN, ARE THE PROPERTY OF DIGITAL EQUIPMENT CORPORATION AND SHALL NOT BE REPRODUCED OR COPIED OR USED IN WHOLE OR IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION."
 COPYRIGHT 1986 DIGITAL EQUIPMENT CORPORATION


REVISION HISTORY		
REV	ECO NUMBER	DATE

DRAWING
 TITLE=TOY
 ABBREV=TOY
 CIRCUIT+TYPE=TOY/CLOCK
 LAST+MODIFIED=



DEFINE
 X+FIRST=0
 X+STEP=SIZE




DRN: ERW	DATE 8-19-86	ENG: ERW	DATE 8-19-86	TITLE: TIME OF YEAR (TOY) Clock
CHK'D: ERW	DATE 8-19-86	SHEET 1 OF 1		SIZE D
NEXT HIGHER ASSEMBLY:			CODE CS	NUMBER M7478-0-42
			REV A	

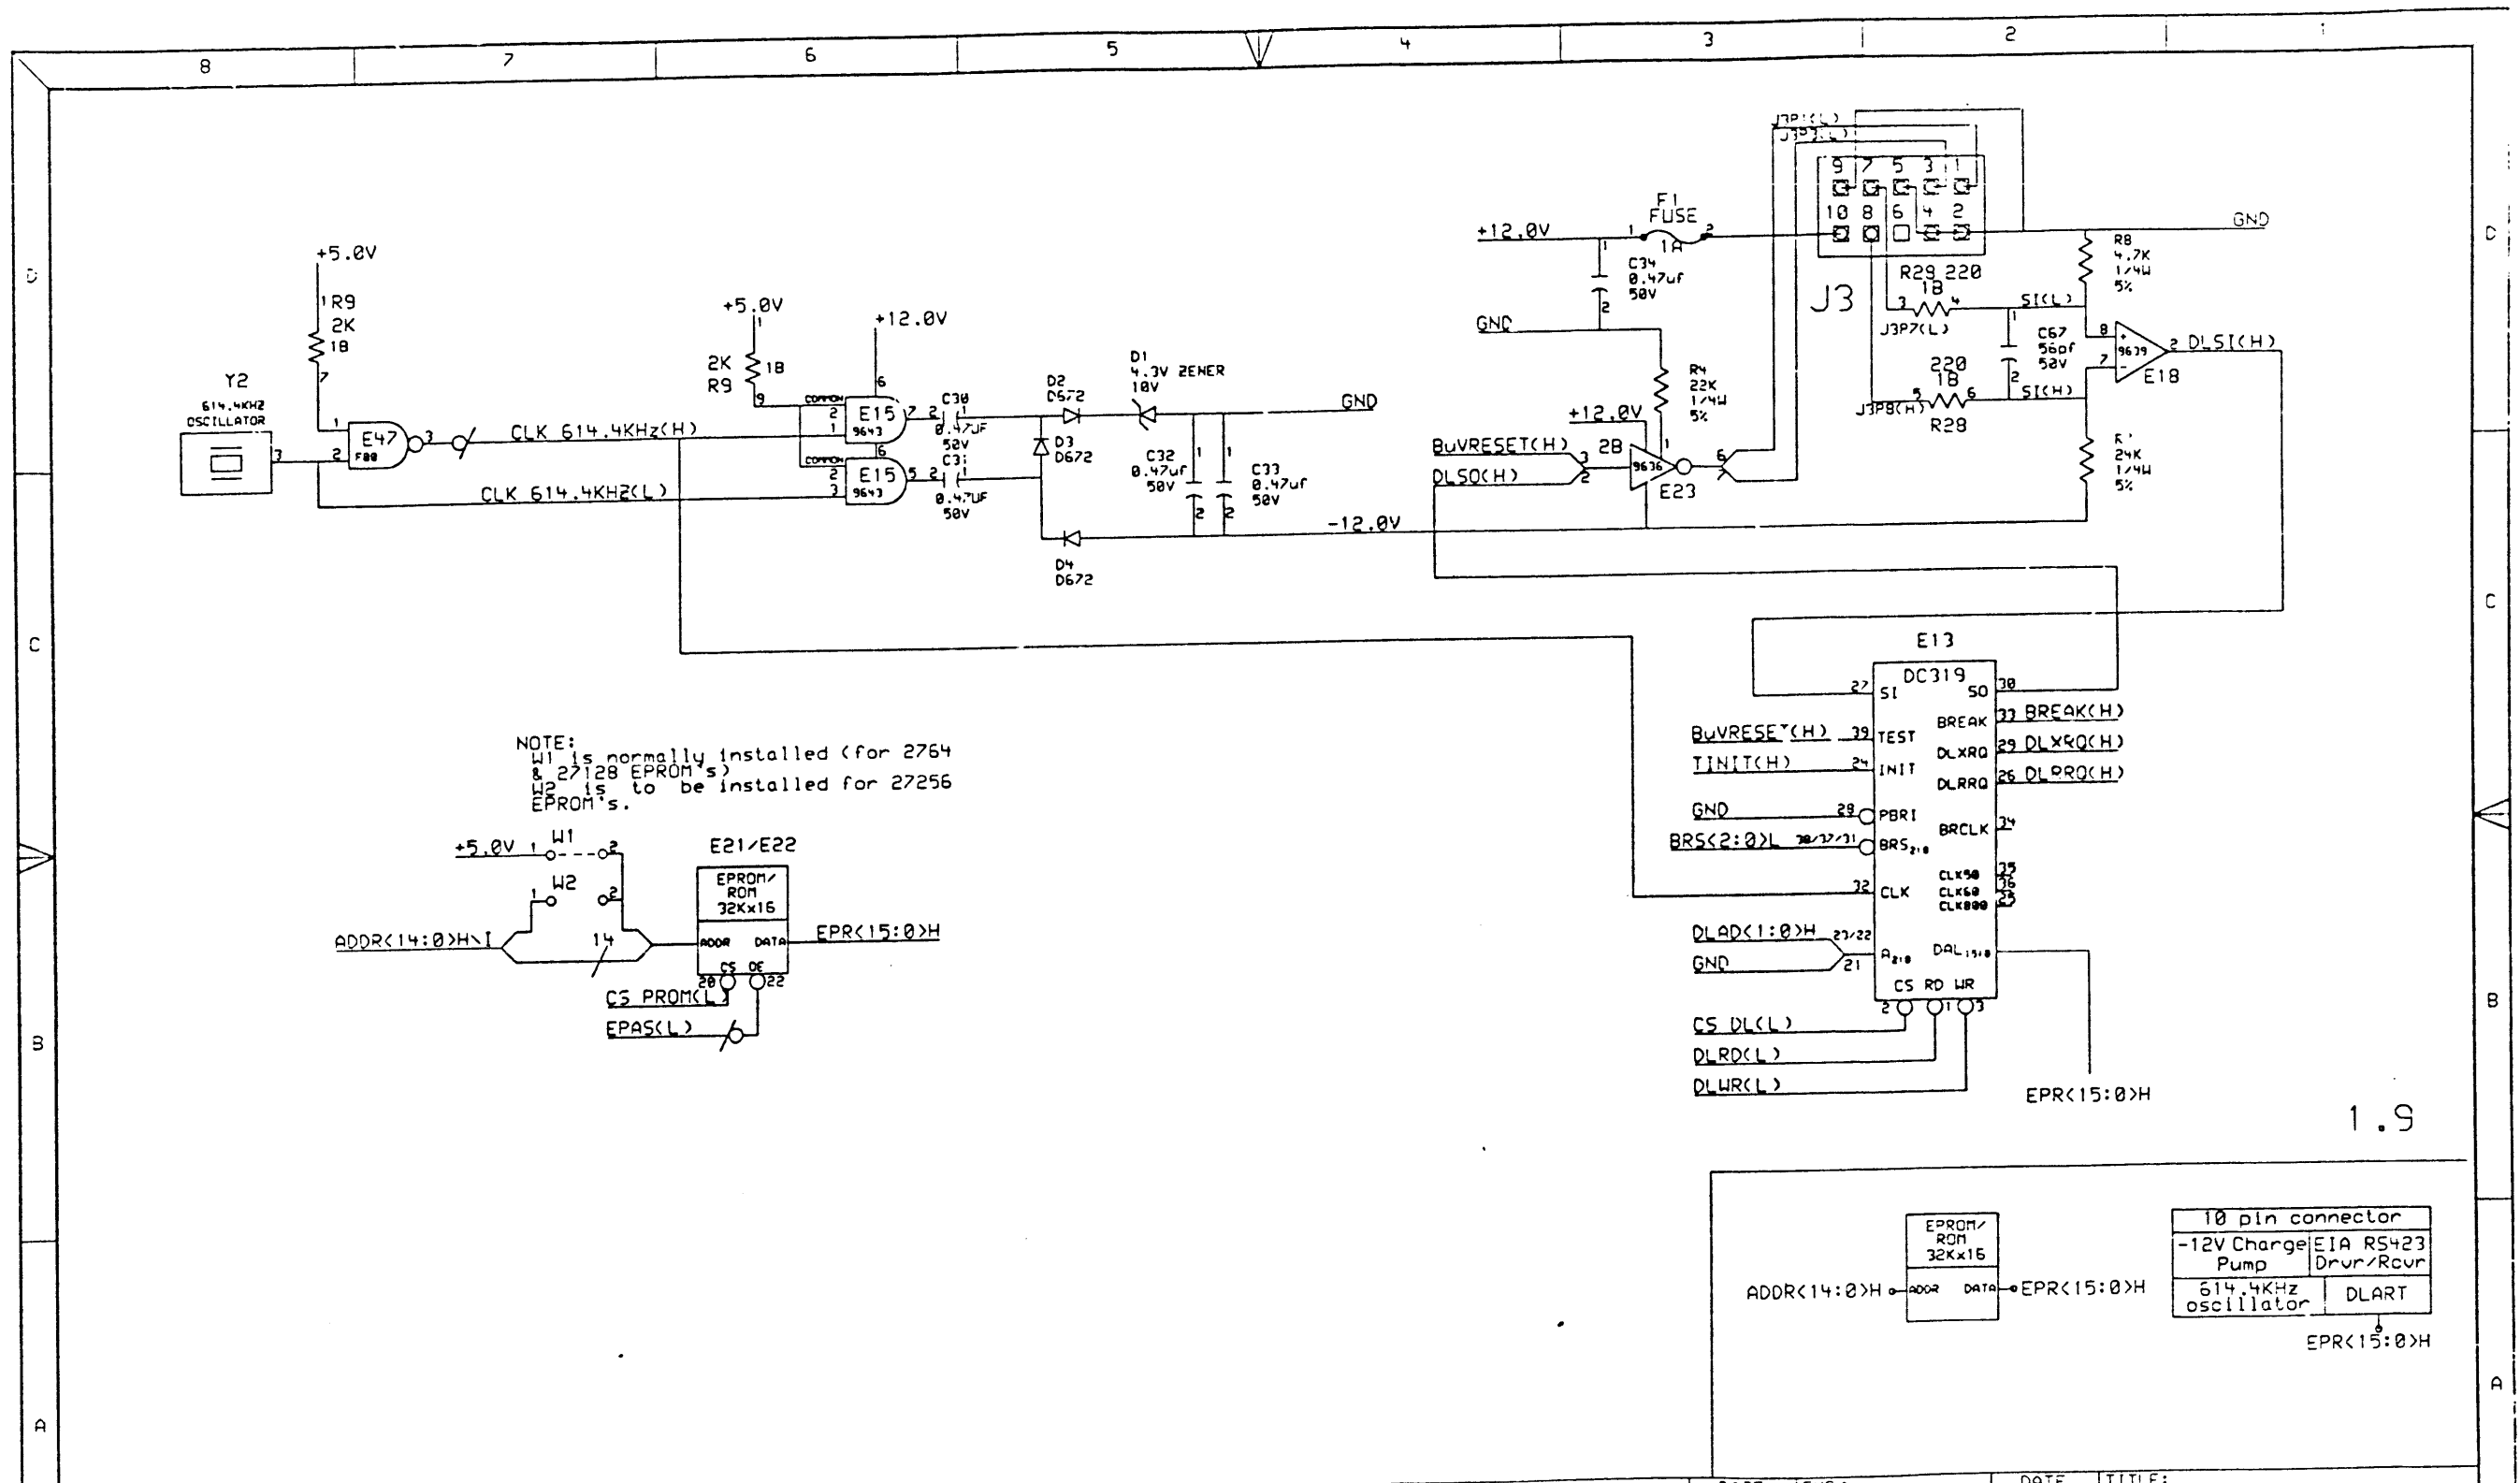

NOTE:
 W1 is normally installed (for 2764
 & 27128 EPROM's)
 W2 is to be installed for 27256
 EPROM's.

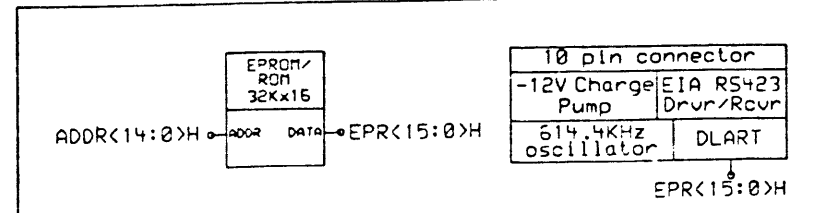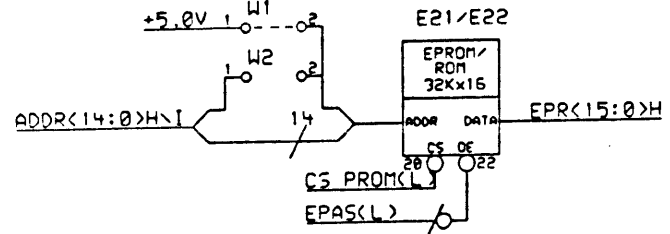

*THIS DRAWING AND SPECIFICATIONS, HEREIN, ARE THE PROPERTY OF DIGITAL EQUIPMENT CORPORATION AND SHALL NOT BE REPRODUCED OR COPIED IN WHOLE OR IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION. COPYRIGHT 1986 DIGITAL EQUIPMENT CORPORATION		REVISION HISTORY REV TECO NUMBER DATE	DRAWING TITLE=COMM ABBREV=COMM CIRCUIT+TYPE=SERIAL+I/O LAST+MODIFIED=	DEFINE X+FIRST=0 X+STEP=SIZE	digital	DRN: Ehw CHK'D: Ehw	DATE 8-19-86 DATE 8-19-86	ENS: Ehw SHEET 1 OF 1	DATE 8-19-86 NEXT HIGHER ASSEMBLY:	TITLE: Console Serial Line Interface	SIZE D CODE CS	NUMBER M7478-0-43	REV A
-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	--	------------------------------------------	-----------------------------------------------------------------------------------	------------------------------------	---------	------------------------	------------------------------	--------------------------	---------------------------------------	--------------------------------------	-------------------	-------------------	-------

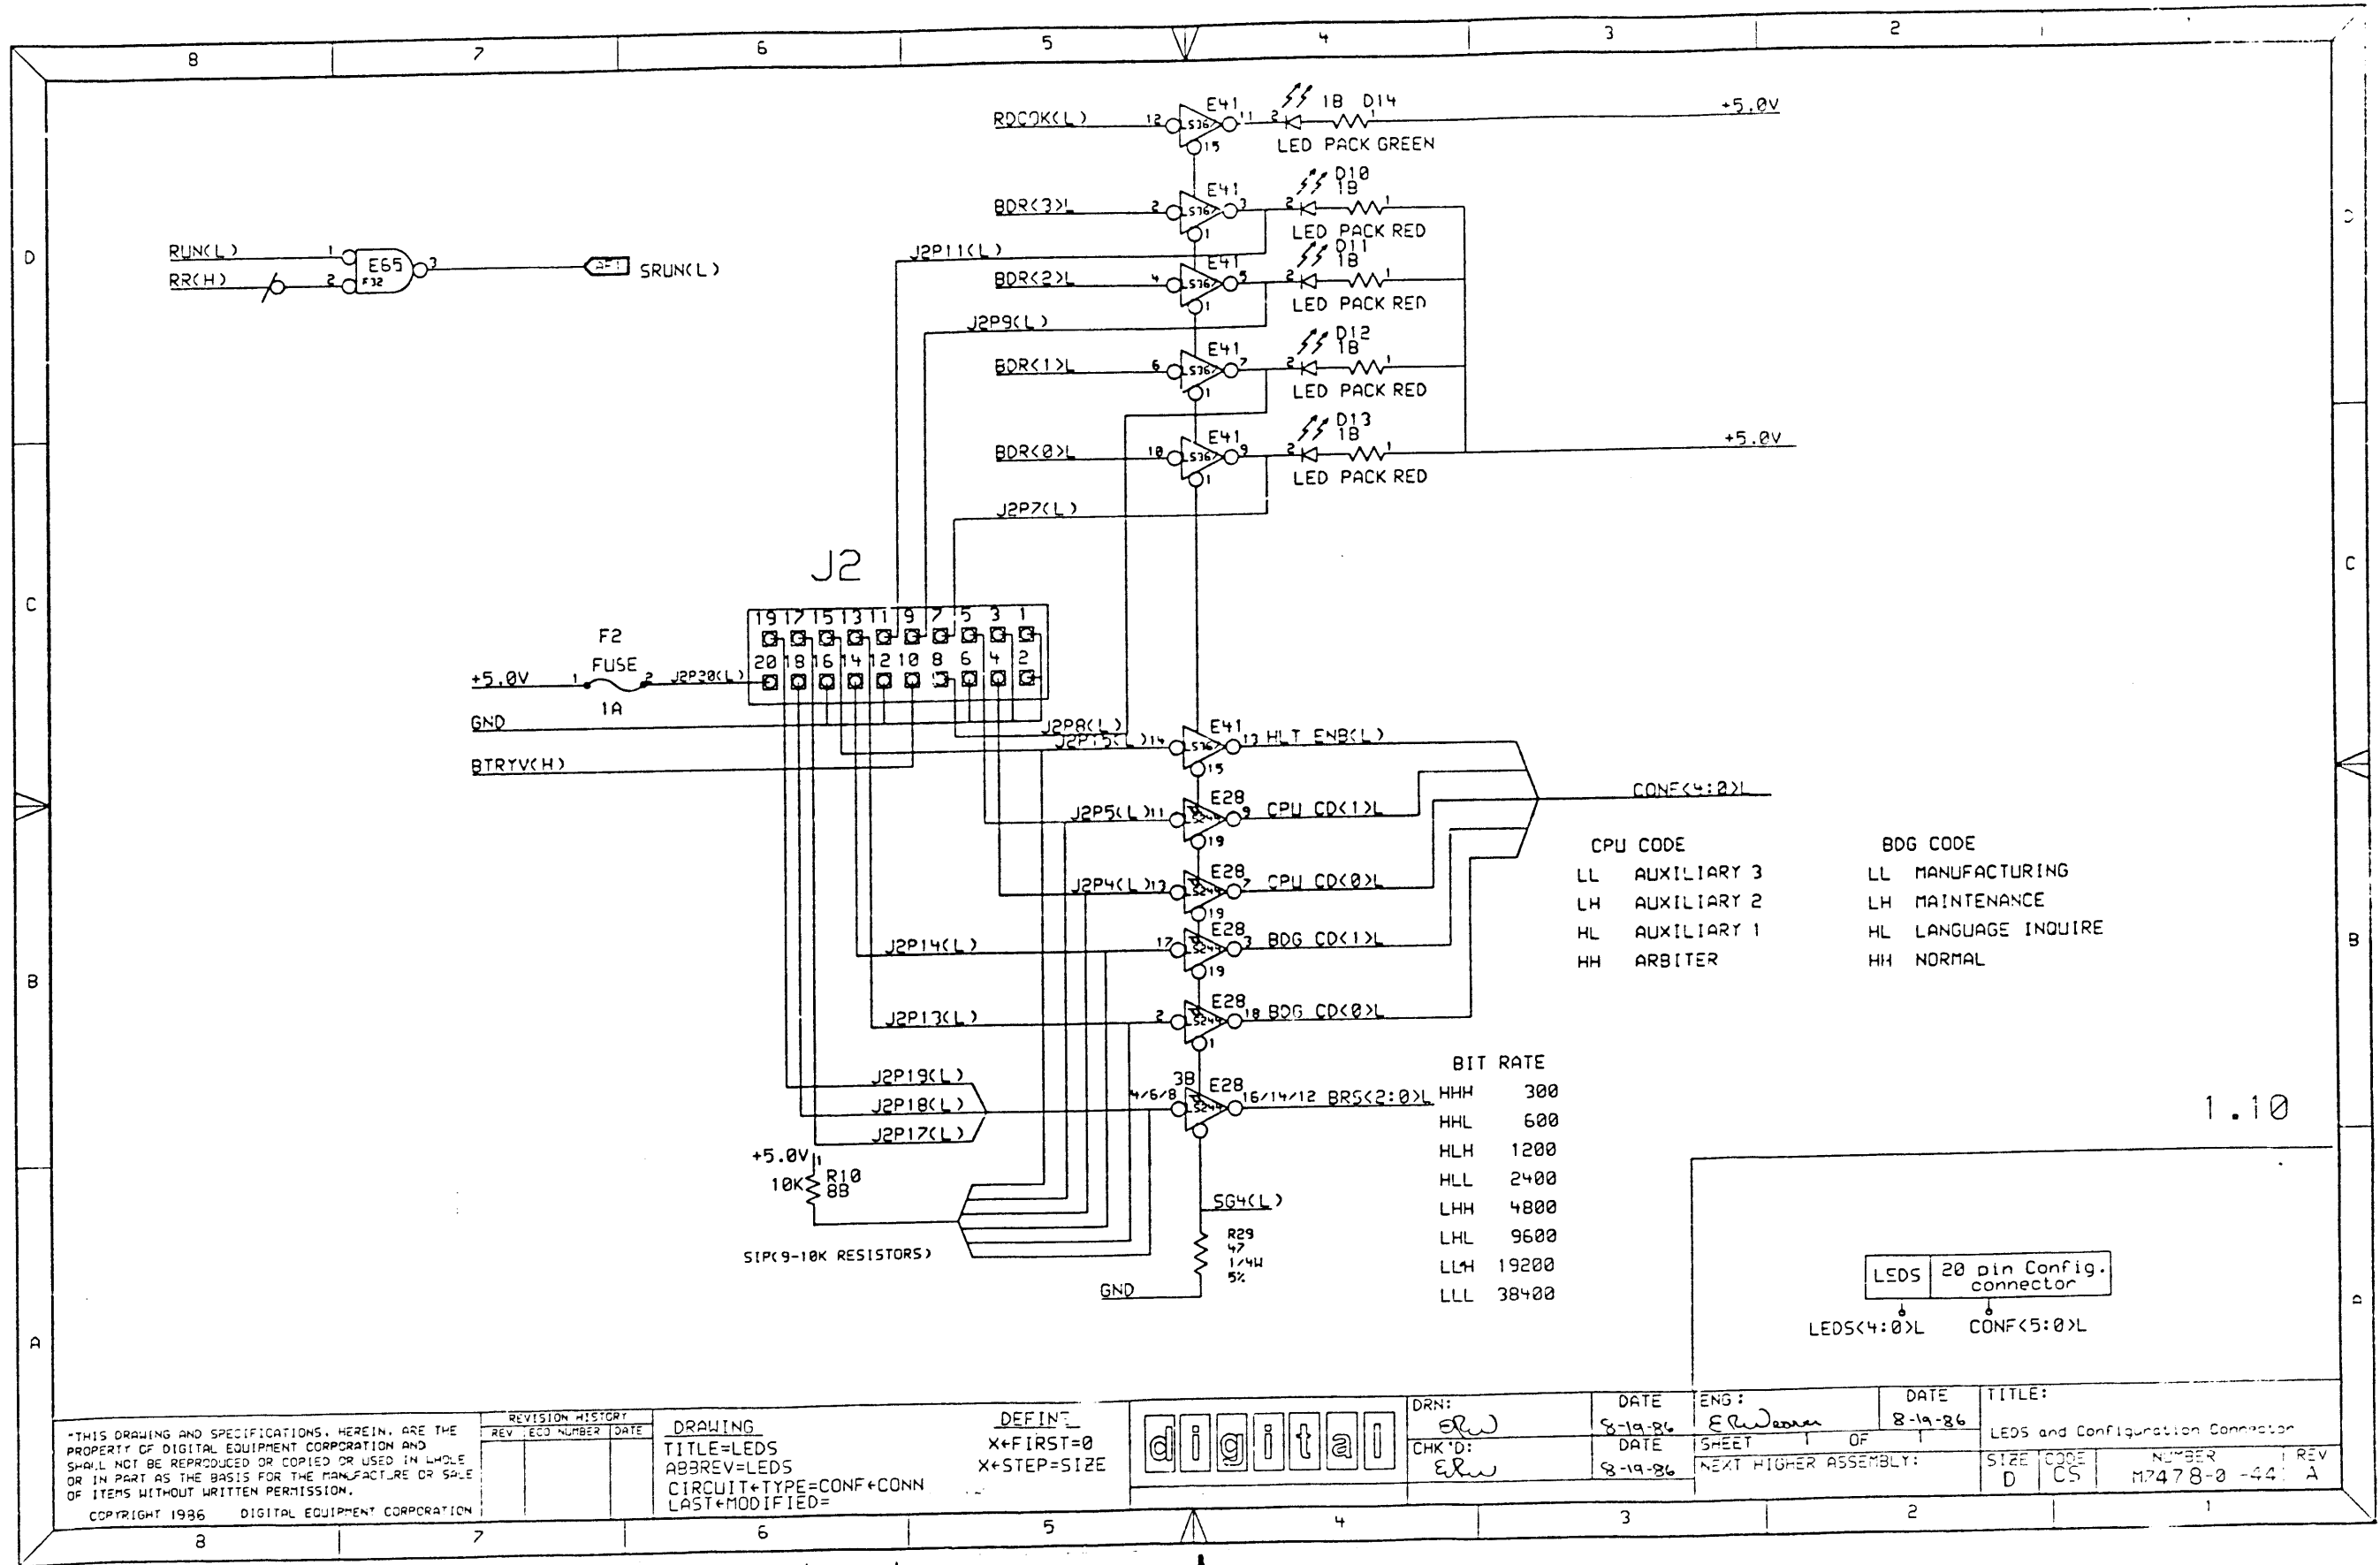

*THIS DRAWING AND SPECIFICATIONS, HEREIN, ARE THE PROPERTY OF DIGITAL EQUIPMENT CORPORATION AND SHALL NOT BE REPRODUCED OR COPIED OR USED IN WHOLE OR IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION.

COPYRIGHT 1986 DIGITAL EQUIPMENT CORPORATION

REVISION HISTORY		
REV	ECO NUMBER	DATE

DRAWING
 TITLE=LEDS
 ABBREV=LEDS
 CIRCUIT+TYPE=CONF+CONN
 LAST+MODIFIED=

DEFINITION
 X+FIRST=0
 X+STEP=SIZE




DRN: *ELW*
 CHK'D: *ELW*

DATE: 8-19-86
 DATE: 8-19-86

ENG: *ELW*
 SHEET 1 OF 1


DATE: 8-19-86

TITLE: LEDS and Configuration Connector
 SIZE: D CODE: CS NUMBER: M7478-0-44: A REV: 1

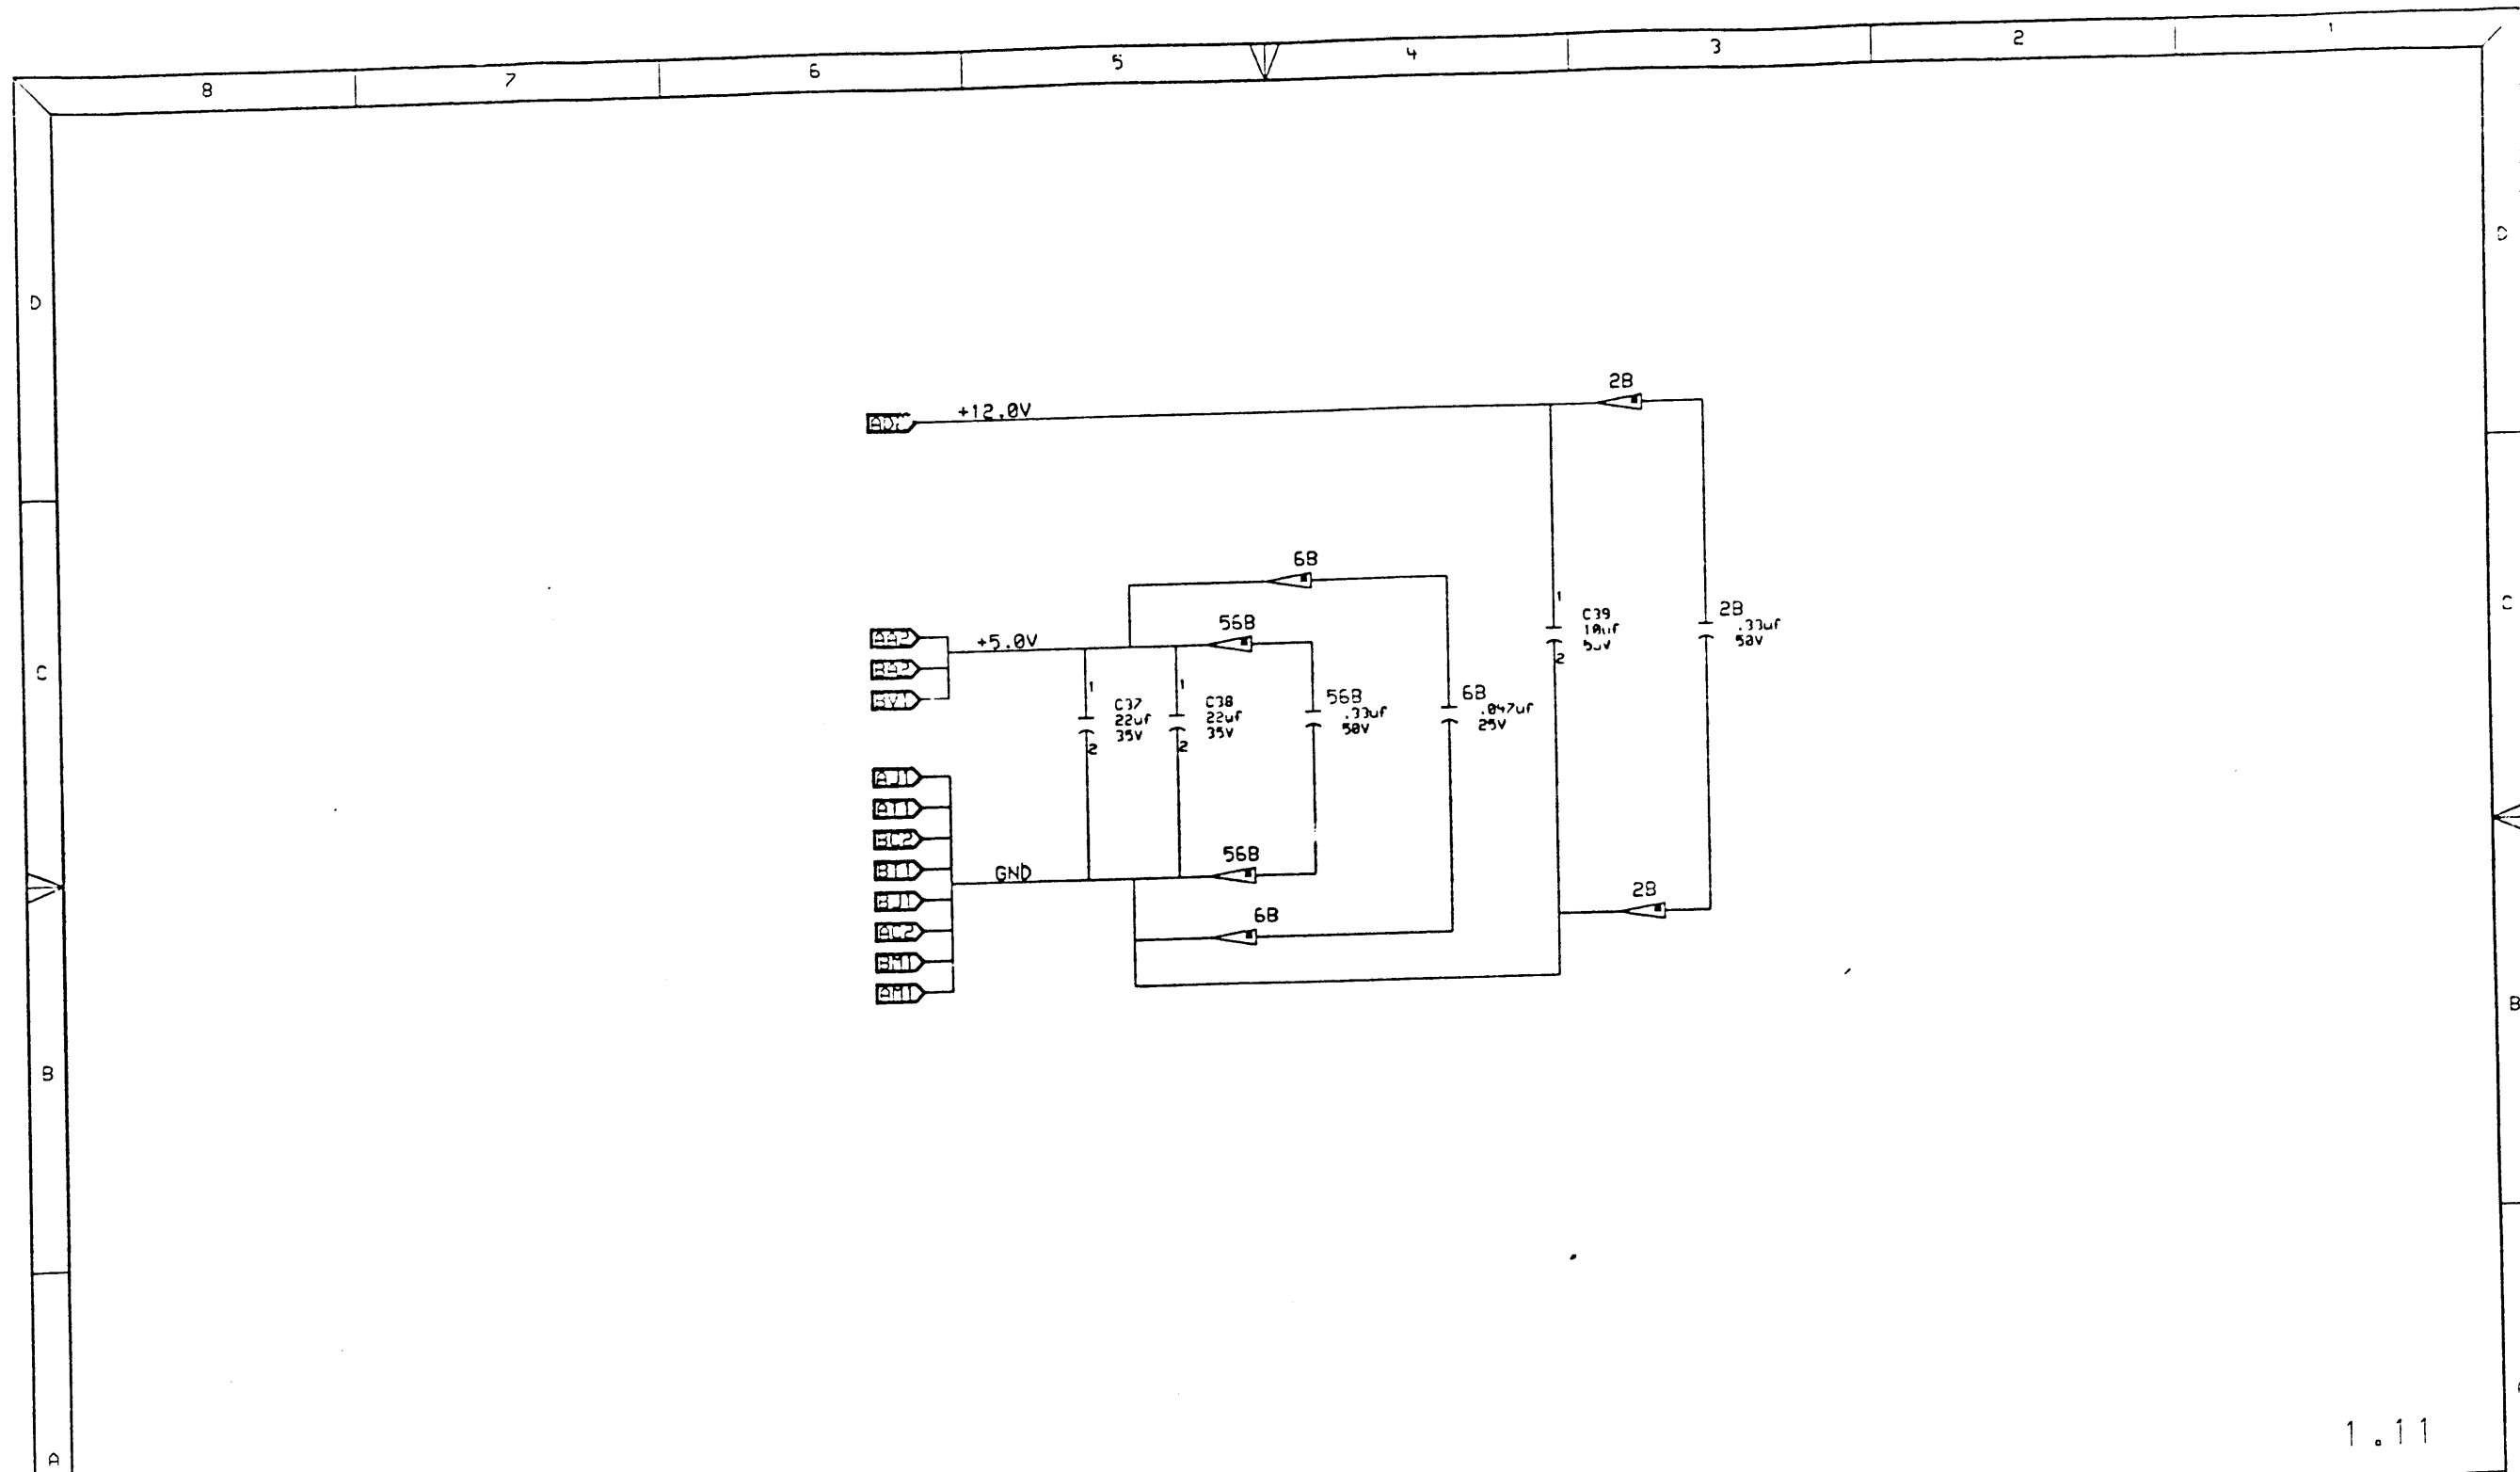

1.11

*THIS DRAWING AND SPECIFICATIONS, HEREIN, ARE THE PROPERTY OF DIGITAL EQUIPMENT CORPORATION AND SHALL NOT BE REPRODUCED OR COPIED OR USED IN WHOLE OR IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION. COPYRIGHT 1986 DIGITAL EQUIPMENT CORPORATION		REVISION HISTORY REV ECD NUMBER DATE	DRAWING TITLE= LAST+MODIFIED=	digital	DRN: EFW	DATE 8-19-86	ENG: EFW	DATE 8-19-86	TITLE: Decoupling Capacitors
					CHK'D: EFW	DATE 8-19-86	SHEET 1 OF 1	NEXT HIGHER ASSEMBLY:	SIZE CODE NUMBER REV D CS M7478-0 -45 A

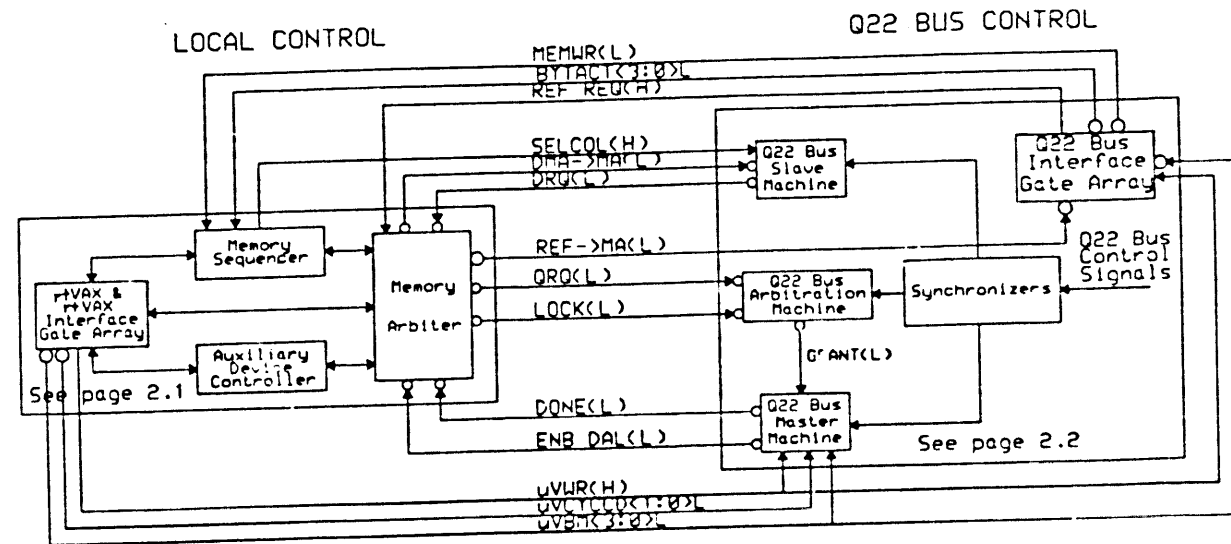

2

"THIS DRAWING AND SPECIFICATIONS, HEREIN, ARE THE PROPERTY OF DIGITAL EQUIPMENT CORPORATION AND SHALL NOT BE REPRODUCED OR COPIED OR USED IN WHOLE OR IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION.
 COPYRIGHT 1986 DIGITAL EQUIPMENT CORPORATION

REVISION HISTORY		
REV	TECO NUMBER	DATE


DRAWING
 TITLE=CTLBLOCK
 ABBREV=ctl1
 CIRCUIT+TYPE=CONTROL
 LAST+MODIFIED=



DRN: <i>Elw</i>	DATE 8-19-86	ENG: <i>E. Jensen</i>	DATE 8-19-86	TITLE: KAS20 State Machines
CHK'D: <i>Elw</i>	DATE 8-19-86	SHEET 1 OF		
NEXT HIGHER ASSEMBLY:				

SIZE D	CODE CS	NUMBER M7478-0-46	REV A
-----------	------------	----------------------	----------

8 7 6 5 4 3 2 1

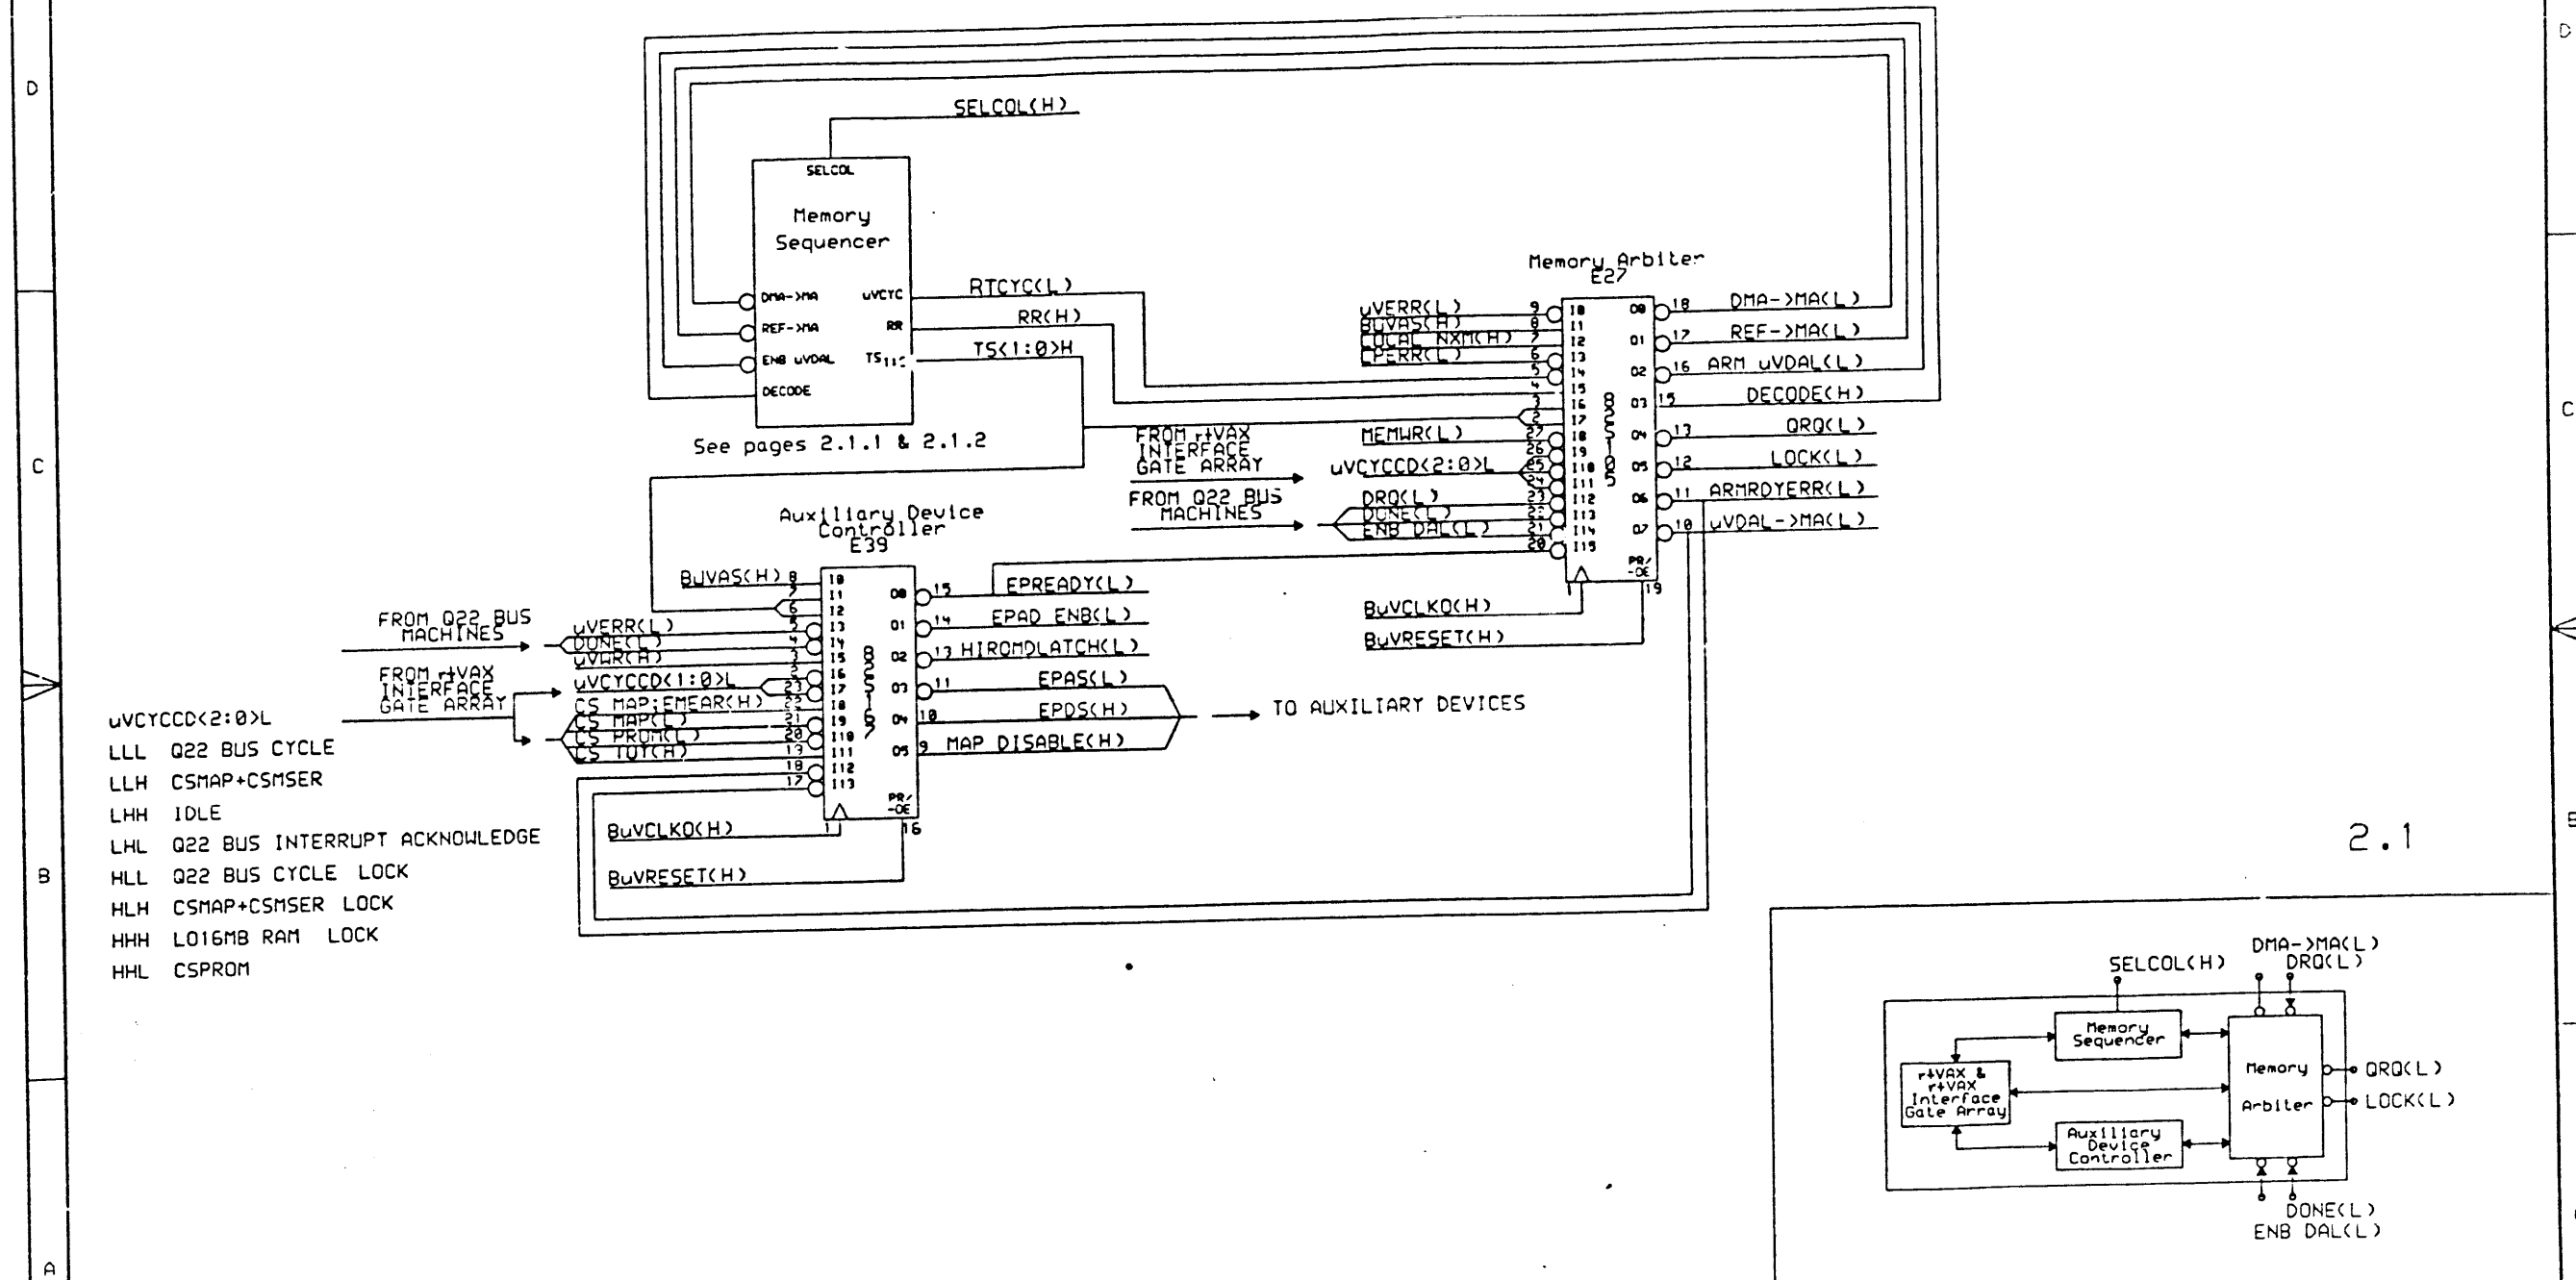


- uVVCYCCD<2:0>(L)
- LLL Q22 BUS CYCLE
- LLH CSMAP+CSMSER
- LHH IDLE
- LHL Q22 BUS INTERRUPT ACKNOWLEDGE
- HLL Q22 BUS CYCLE LOCK
- HLH CSMAP+CSMSER LOCK
- HHH LO16MB RAM LOCK
- HHL CSPROM

2.1

*THIS DRAWING AND SPECIFICATIONS, HEREIN, ARE THE PROPERTY OF DIGITAL EQUIPMENT CORPORATION AND SHALL NOT BE REPRODUCED OR COPIED OR USED IN WHOLE OR IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION. COPYRIGHT 1986 DIGITAL EQUIPMENT CORPORATION	REVISION HISTORY REV ECD NUMBER DATE	DRAWING TITLE=r+VAX MACHINE ABBREV=r+VAX CIRCUIT+TYPE=control LAST+MODIFIED=	DEFINE X+FIRST=0 X+STEP=SIZE	digital	DRN: ERW	DATE 8-19-86	ENG: ERW	DATE 8-19-86	TITLE: r+VAX Cycle Controller
					CHK'D: ERW	DATE 8-19-86	SHEET OF	NEXT HIGHER ASSEMBLY:	SIZE CODE NUMBER REV D CS M7478-2 -47 A

8 7 6 5 4 3 2 1

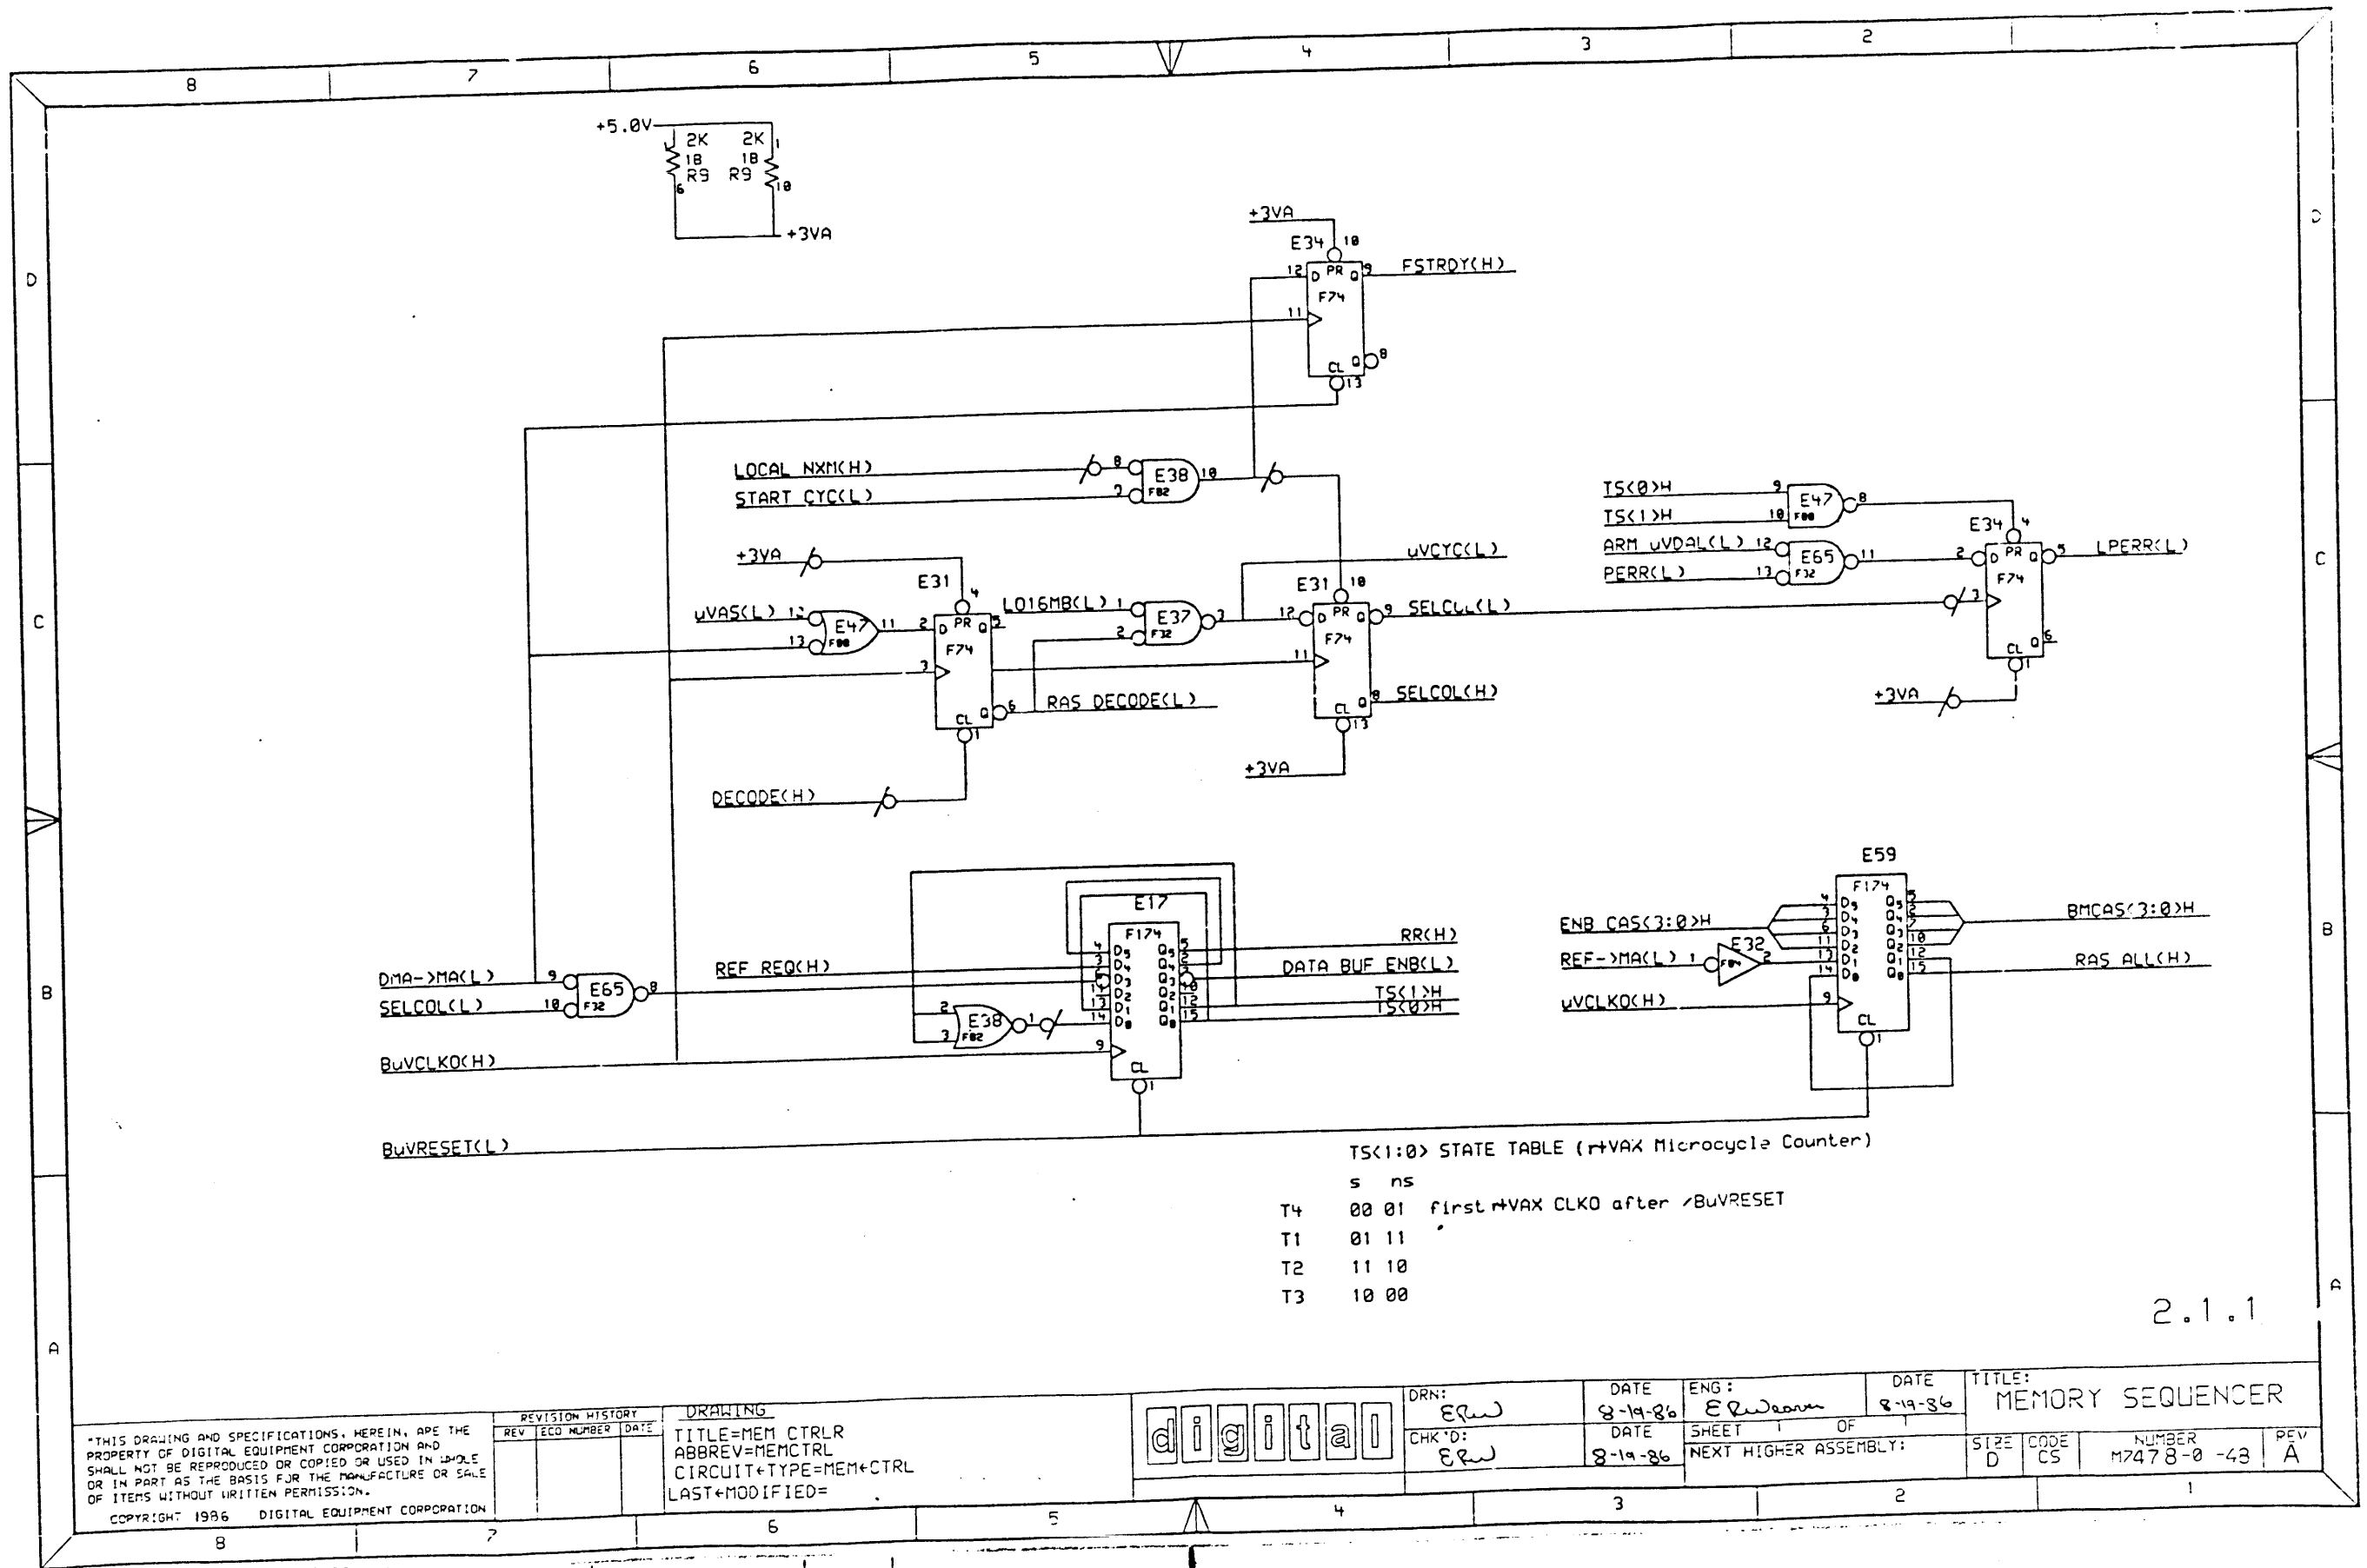

TS<1:0> STATE TABLE (MVA Microcycle Counter)

s	ns	
T4	00 01	first MVA CLKO after BuVRESET
T1	01 11	
T2	11 10	
T3	10 00	

2.1.1

*THIS DRAWING AND SPECIFICATIONS, HEREIN, ARE THE PROPERTY OF DIGITAL EQUIPMENT CORPORATION AND SHALL NOT BE REPRODUCED OR COPIED OR USED IN WHOLE OR IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION.
COPYRIGHT 1986 DIGITAL EQUIPMENT CORPORATION

REVISION HISTORY		
REV	ECO NUMBER	DATE

DRAWING
TITLE=MEM CTRLR
ABBREV=MEMCTRL
CIRCUIT+TYPE=MEM+CTRL
LAST+MODIFIED=



DRN: ERW
CHK'D: ERW

DATE 8-19-86

ENG: ERW
DATE 8-19-86

SHEET 1 OF

TITLE: MEMORY SEQUENCER

SIZE D CODE CS NUMBER M7478-0 -43 REV A

B

7

6

5

4

3

2

1

D

C

B


A

C

C


B

A

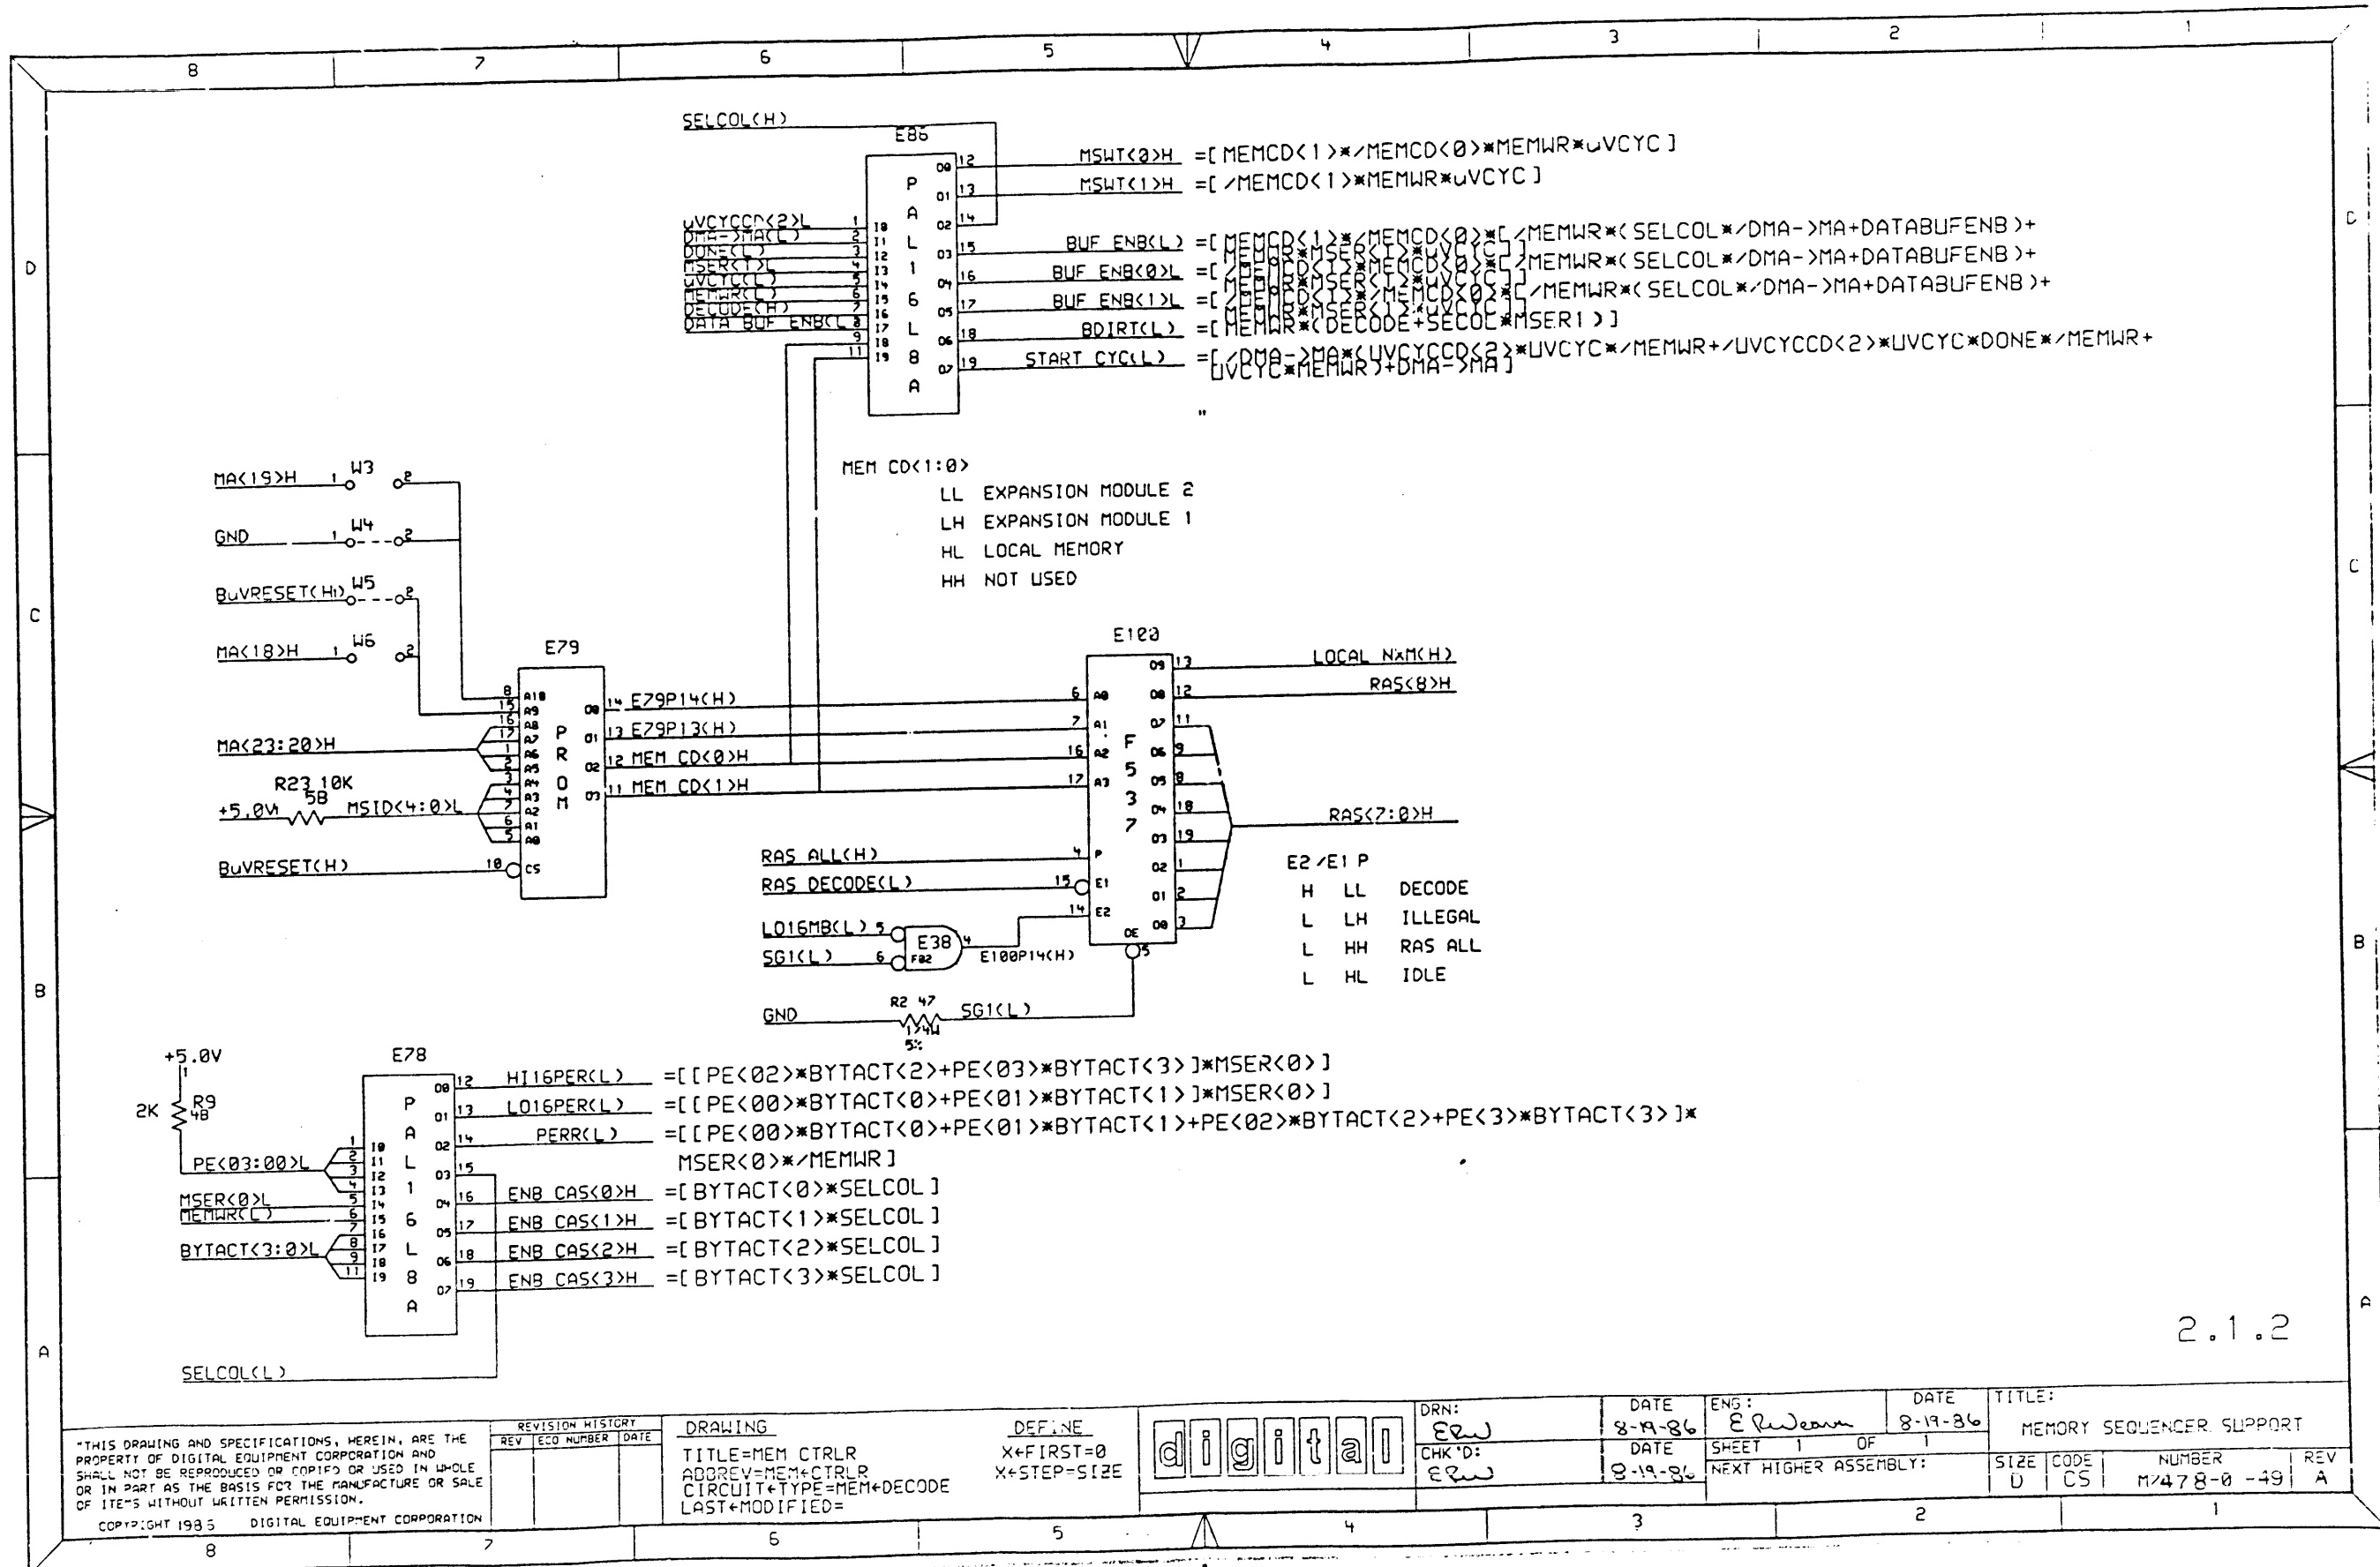

2.1.2

*THIS DRAWING AND SPECIFICATIONS, HEREIN, ARE THE PROPERTY OF DIGITAL EQUIPMENT CORPORATION AND SHALL NOT BE REPRODUCED OR COPIED OR USED IN WHOLE OR IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION. COPYRIGHT 1985 DIGITAL EQUIPMENT CORPORATION		REVISION HISTORY REV ECO NUMBER DATE	DRAWING TITLE=MEM CTRLR ADDR=MEM+CTRLR CIRCUIT+TYPE=MEM+DECODE LAST+MODIFIED=	DEFINE X+FIRST=0 X+STEP=SIZE	digital	DRN: ELW CHK'D: ELW	DATE 8-19-86 DATE 8-19-86	ENG: E. R. W.	DATE 8-19-86	TITLE: MEMORY SEQUENCER SUPPORT
						SHEET 1 OF 1 NEXT HIGHER ASSEMBLY:	SIZE CODE U CS	NUMBER M/478-0-49	REV A	

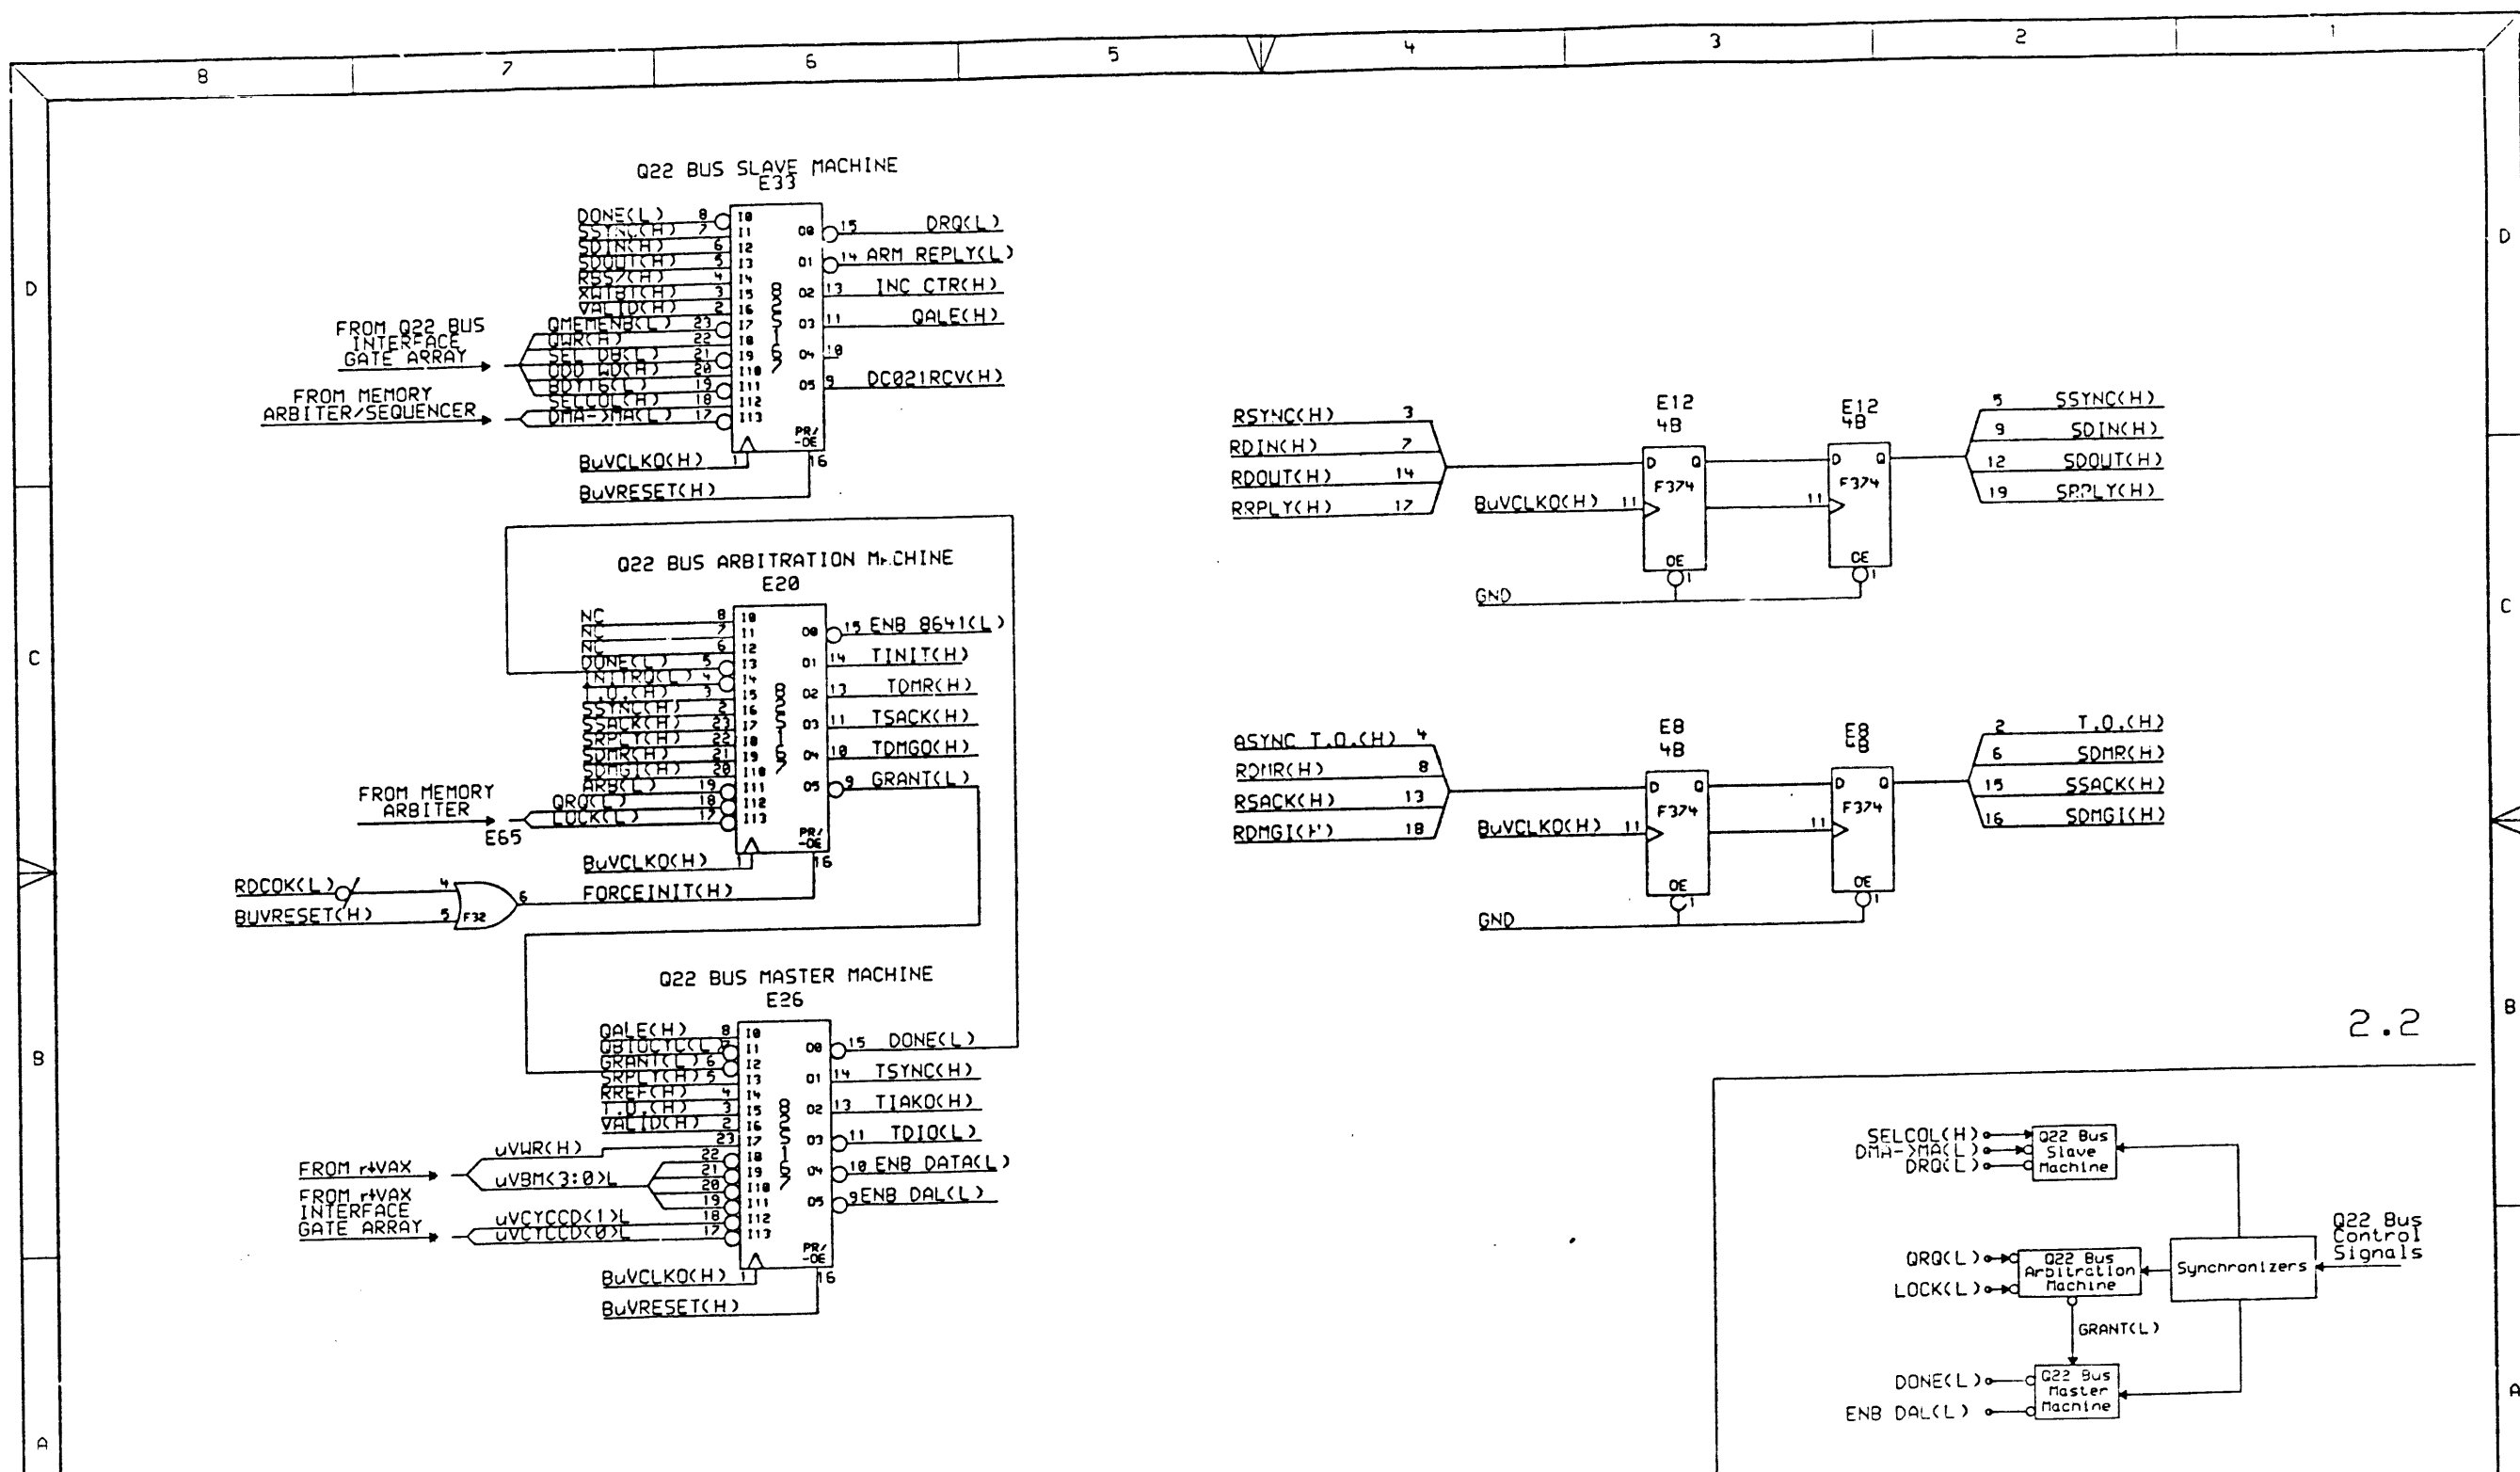

2.2

*THIS DRAWING AND SPECIFICATIONS, HEREIN, ARE THE PROPERTY OF DIGITAL EQUIPMENT CORPORATION AND SHALL NOT BE REPRODUCED OR COPIED OR USED IN WHOLE OR IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION.
COPYRIGHT 1986 DIGITAL EQUIPMENT CORPORATION

REVISION HISTORY		
REV	TECD	NUMBER

DRAWING
TITLE=QBUS MACHINE
ABBREV=QCTR
CIRCUIT+TYPE=QBUS+CNTRL
LAST+MODIFIED=

DEFINE
X=FIRST=0
Y=STEP=SIZE

digital

DRN:	DATE	ENG:	DATE
Ew	8-19-86	Ew	8-19-86
CHK'D:	DATE	SHEET	OF
Ew	8-19-86	1	1

NEXT HIGHER ASSEMBLY:		SIZE	CODE	NUMBER	REV
		D	CS	M/4/8-0-50	A

TITLE: Q22 BUS STATE MACHINES			

```

NAME 23_0531_00_E27 MEMORY ARBITER MACHINE
OPTION PRESET
INPUT -EPRDY, -ENBADR, -DONE, -DRQ, -CYCD0, -CYCD1, -CYCD2,
INPUT -MEMWR, S0, S1, RR, -VCYC, -LPERR, LOCALNXM, BVAS, -VERR
OUTPUT -DALMA, -RDYERR, -LOCK, -ORQ, DECODE, -ARMDAL, -REFMA, -DMAMA

LOCAL FLAG ; LOCK FLAG PREVENTS VAX FROM CHANGING MEMORY UNTIL Q22 BUS
; MASTERSHIP, Q22 BUS AND REFRESH CYCLES ARE ALLOWED.
MACHINE 23_0531_00_E27

STATE POWERUP ; LET REFRESH OP Q22 SLAVE THROUGH UNTIL Q22 BUS OWNED.
IF [ -DONE = S1 = -S0 = RR ] THEN FINISHUP [ -DMAMA, -DALMA, -DECODE, &
-ARMDAL, -FLAG ]
IF [ -DONE = DRQ ] THEN FINISHUP [ -DMAMA, -DALMA, -DECODE, &
-ARMDAL, -FLAG ]
IF [ DONE = -ENBADR = CYCD0 ] THEN VXT12 [ RDYERR, ARMDAL ] ; LOCAL MISS.
IF [ DONE = ENBADR = CYCD0 ] THEN Q22MT3 [ -DALMA ] ; LOCAL MISS AND GLOBAL HIT
IF [ DONE = CYCD1 = -CYCD0 ] THEN VXT12 [ RDYERR ] ; FINISH UP THE MAP CYCLE.

STATE SYNCUP, NUMBER -LLLLL
GOTO FINISHUP [ -DMAMA, -DALMA, -DECODE, -ARMDAL ]

STATE FINISHUP, NUMBER -HLLLH ; Q22 SLAVE CYCLES HAVE TOP PRIORITY, REFRESH
IF [ -LPERR = DRQ ] THEN Q22SLAVE [ DMAMA ]
IF [ -LPERR = RR = -DRQ ] THEN REFRESH [ REFMA ] ; LPERR IS FOR OPTIMIZATION.
IF [ FLAG = -RR = -DRQ ] THEN VXT10 ; IF FLAGWAIT FOR DONE.
IF [ -S1 = -S0 = -EPRDY = -FLAG = -RR = -DRQ ] THEN VXSLAVE [ DALMA ]

STATE REFRESH, NUMBER -HHHLH
GOTO RT2

STATE RT2, NUMBER -LLLLL
GOTO RT3

STATE RT3 ; WHEN REFRESH, RAS(0:0)H AND LOCALNXM(H) ASSERT.
GOTO RT4

STATE RT4 [ -RDYERR ]
GOTO RT5

STATE RT5 [ -REFMA ]
GOTO RT6

STATE RT6 [ -DECODE, -RDYERR ]
GOTO SYNCUP

STATE Q22SLAVE, NUMBER -HLLLH ; LOCAL MEMORY IS SLAVE TO Q22 BUS MASTER.
GOTO RT2 [ DECODE ]

STATE VXSLAVE, NUMBER -HLLLH ; LOCAL MEMORY IS SLAVE TO VAX.
GOTO VXT3 [ DECODE ]

STATE VXT3, NUMBER -LHLLL
IF [ S1 = -S0 = VCYC = BVAS = CYCD2 = -DONE ] THEN READY [ ARMDAL, RDYERR ]
IF [ S1 = -S0 = VCYC = BVAS = -CYCD2 = -CYCD1 = -CYCD0 = DONE ] THEN READY &
[ ARMDAL, RDYERR ]
IF [ S1 = -S0 = VCYC = CYCD1 = CYCD0 = DONE = EPRDY ] THEN READY [ ARMDAL, &
RDYERR ]
IF [ S1 = -S0 = -BVAS = -VCYC ] THEN FINISHUP [ -DMAMA, -DALMA, &
-DECODE, -ARMDAL ] ; IF NOTHING TO DO GO LOOK FOR REFRESH OR Q22 SLAVE.
IF [ S1 = -S0 = VCYC = BVAS = -CYCD2 = -DONE ] THEN RT4 [ ORQ, LOCK, FLAG ]
IF [ S1 = -S0 = -VCYC = BVAS ] THEN VXT4 [ -DECODE ] ; WHAT CYCLE TO DO?

```

```

STATE VXT4 ; FIND OUT WHAT KIND OF CYCLE TO RUN?
IF [ -VCYC = CYCD2 = -CYCD1 = CYCD0 ] THEN Q22CYC [ ORQ, -DALMA, ARMDAL ]
IF [ -VCYC = -CYCD2 = -CYCD1 = CYCD0 ] THEN PROMCYC [ RDYERR ]
IF [ -VCYC = -CYCD1 = -CYCD0 ] THEN RT4
IF [ -VCYC = CYCD2 = CYCD1 = -CYCD0 ] THEN Q22CYC
IF [ -VCYC = CYCD2 = CYCD1 = -CYCD0 ] THEN Q22CYC [ LOCK ]
IF [ -VCYC = -CYCD2 = CYCD1 = -CYCD0 ] THEN Q22CYC [ ARMDAL ]
IF [ -VCYC = CYCD2 = CYCD1 = CYCD0 ] THEN Q22CYC [ LOCK, ARMDAL ]
IF [ -VCYC = -CYCD2 = CYCD1 = CYCD0 ] THEN Q22CYC [ LOCK, ARMDAL ]

STATE READY ; CYCLE IS RUNNING AND EPR MACHINE ASSERTS EPRDY
IF [ -S1 = S0 ] THEN VXT6 ; TO STROBE MEMCD(1:0) OR MSER WRITE DATA.

STATE VXT6 ; IF VAX ERROR PIN IS ASSERTED, EXTRA CYCLE OCCURS.
IF [ VERR ] THEN VXT9 [ -LOCK, -ORQ ] ; FREE Q22 BUS ON ERRORS OR MEMORY WRITES.
IF [ -VERR = -MEMWR ] THEN VXT7 [ -ORQ, -DECODE, -RDYERR, -FLAG ]
IF [ -VERR = MEMWR ] THEN VXT7 [ -LOCK, -DECODE, -RDYERR, -FLAG, -ORQ ]

STATE VXT7, NUMBER -LLLHM
GOTO VXT8 [ -DMAMA, -DECODE, -DALMA, -ARMDAL ]

STATE VXT8, NUMBER -HLLHM ; IF LOCAL PARITY ERROR THEN PROTECT MEMORY AND WAIT
IF [ LPERR ] THEN VXT8 [ -LOCK ]
IF [ -LPERR = -RR = -DRQ ] THEN VXSLAVE [ DALMA ] ; ALLOW Q22 IAKS.
IF [ -LPERR = RR = -DRQ ] THEN REFRESH [ REFMA ] ; ALLOW REFRESH.
IF [ -LPERR = DRQ ] THEN Q22SLAVE [ DMAMA ] ; ALLOW Q22 SLAVE.

STATE VXT9 ; FORCE VAX MACHINE CHECK, THEN ALLOW MEMORY CYCLES
IF [ BVAS = S1 = -S0 = -VERR ] THEN VXT9

STATE VXT9 ; STALL ONE MICROCYCLE IF VAX SAW AN ERROR.
IF [ S1 = S0 = -LOCALNXM ] THEN VXT7 [ -DECODE, -RDYERR ]
IF [ S1 = S0 = LOCALNXM ] THEN RT3 [ -DECODE, -ORQ, -RDYERR, -ARMDAL ]

STATE VXT10 ; STALL UNTIL Q22 BUS MASTERSHIP THEN RUN READ LOCK CYCLE.
IF [ S1 = -S0 = DONE = BVAS = -CYCD2 = -CYCD1 = -CYCD0 ] THEN FINISHUP &
[-FLAG ]
IF [ S1 = -S0 = -DONE = BVAS = -CYCD2 = -CYCD1 = -CYCD0 ] THEN FINISHUP
IF [ S1 = -S0 = -DONE = -BVAS ] THEN VXT8 [ -FLAG, -DMAMA, -ORQ, -DALMA, &
-ARMDAL ]

STATE PROMCYC ; EPR MACHINE RUNS A PROM CYCLE WHEN RDYERR IS ASSERTED.
IF [ EPRDY ] THEN RT4 ; EPR MACHINE ASSERTS EPRDY WHEN PROM CYCLE IS DONE.

STATE VXT12 ; EPR MACHINE IS DOING THE SYNCING.
IF [ EPRDY ] THEN READY [ RDYERR ] ; EPR MACHINE IS DONE AND VAX
; IS FINISHING.

STATE Q22CYC ; Q22 BUS DATA CYCLE OR IAK.
IF [ S1 = S0 ] THEN POWERUP [ ORQ ]

STATE Q22MT3 ; GET IN STEP AND GO RUN THE MISS-HIT CYCLE, TELL EPR MACHINE.
IF [ S1 = -S0 ] THEN Q22MT4 [ DMAMA, RDYERR ]

STATE Q22MT4, NUMBER -HLLLH
GOTO VXSLAVE


END

```

THIS DRAWING AND SPECIFICATIONS ARE THE PROPERTY OF DIGITAL EQUIPMENT CORPORATION AND SHALL NOT BE REPRODUCED OR COPIED OR USED IN WHOLE OR IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION. COPYRIGHT © 1980. DIGITAL EQUIPMENT CORPORATION

REVISIONS	
CHK	CHANGE NO. REV.

digital	DRN. ERW	DATE 8-19-84	ENG. R. J. ...	DATE 8-19-84	TITLE: MEMORY ARBITER LISTING
	CHK'D ERW	DATE 8-19-84	BOARD LOCATION: 1 OF 1	SIZE CODE D CS	NUMBER M7476-0-51
FIRST USED ON OPTION/MODEL:		NEXT HIGHER ASSEMBLY:		REV. A	

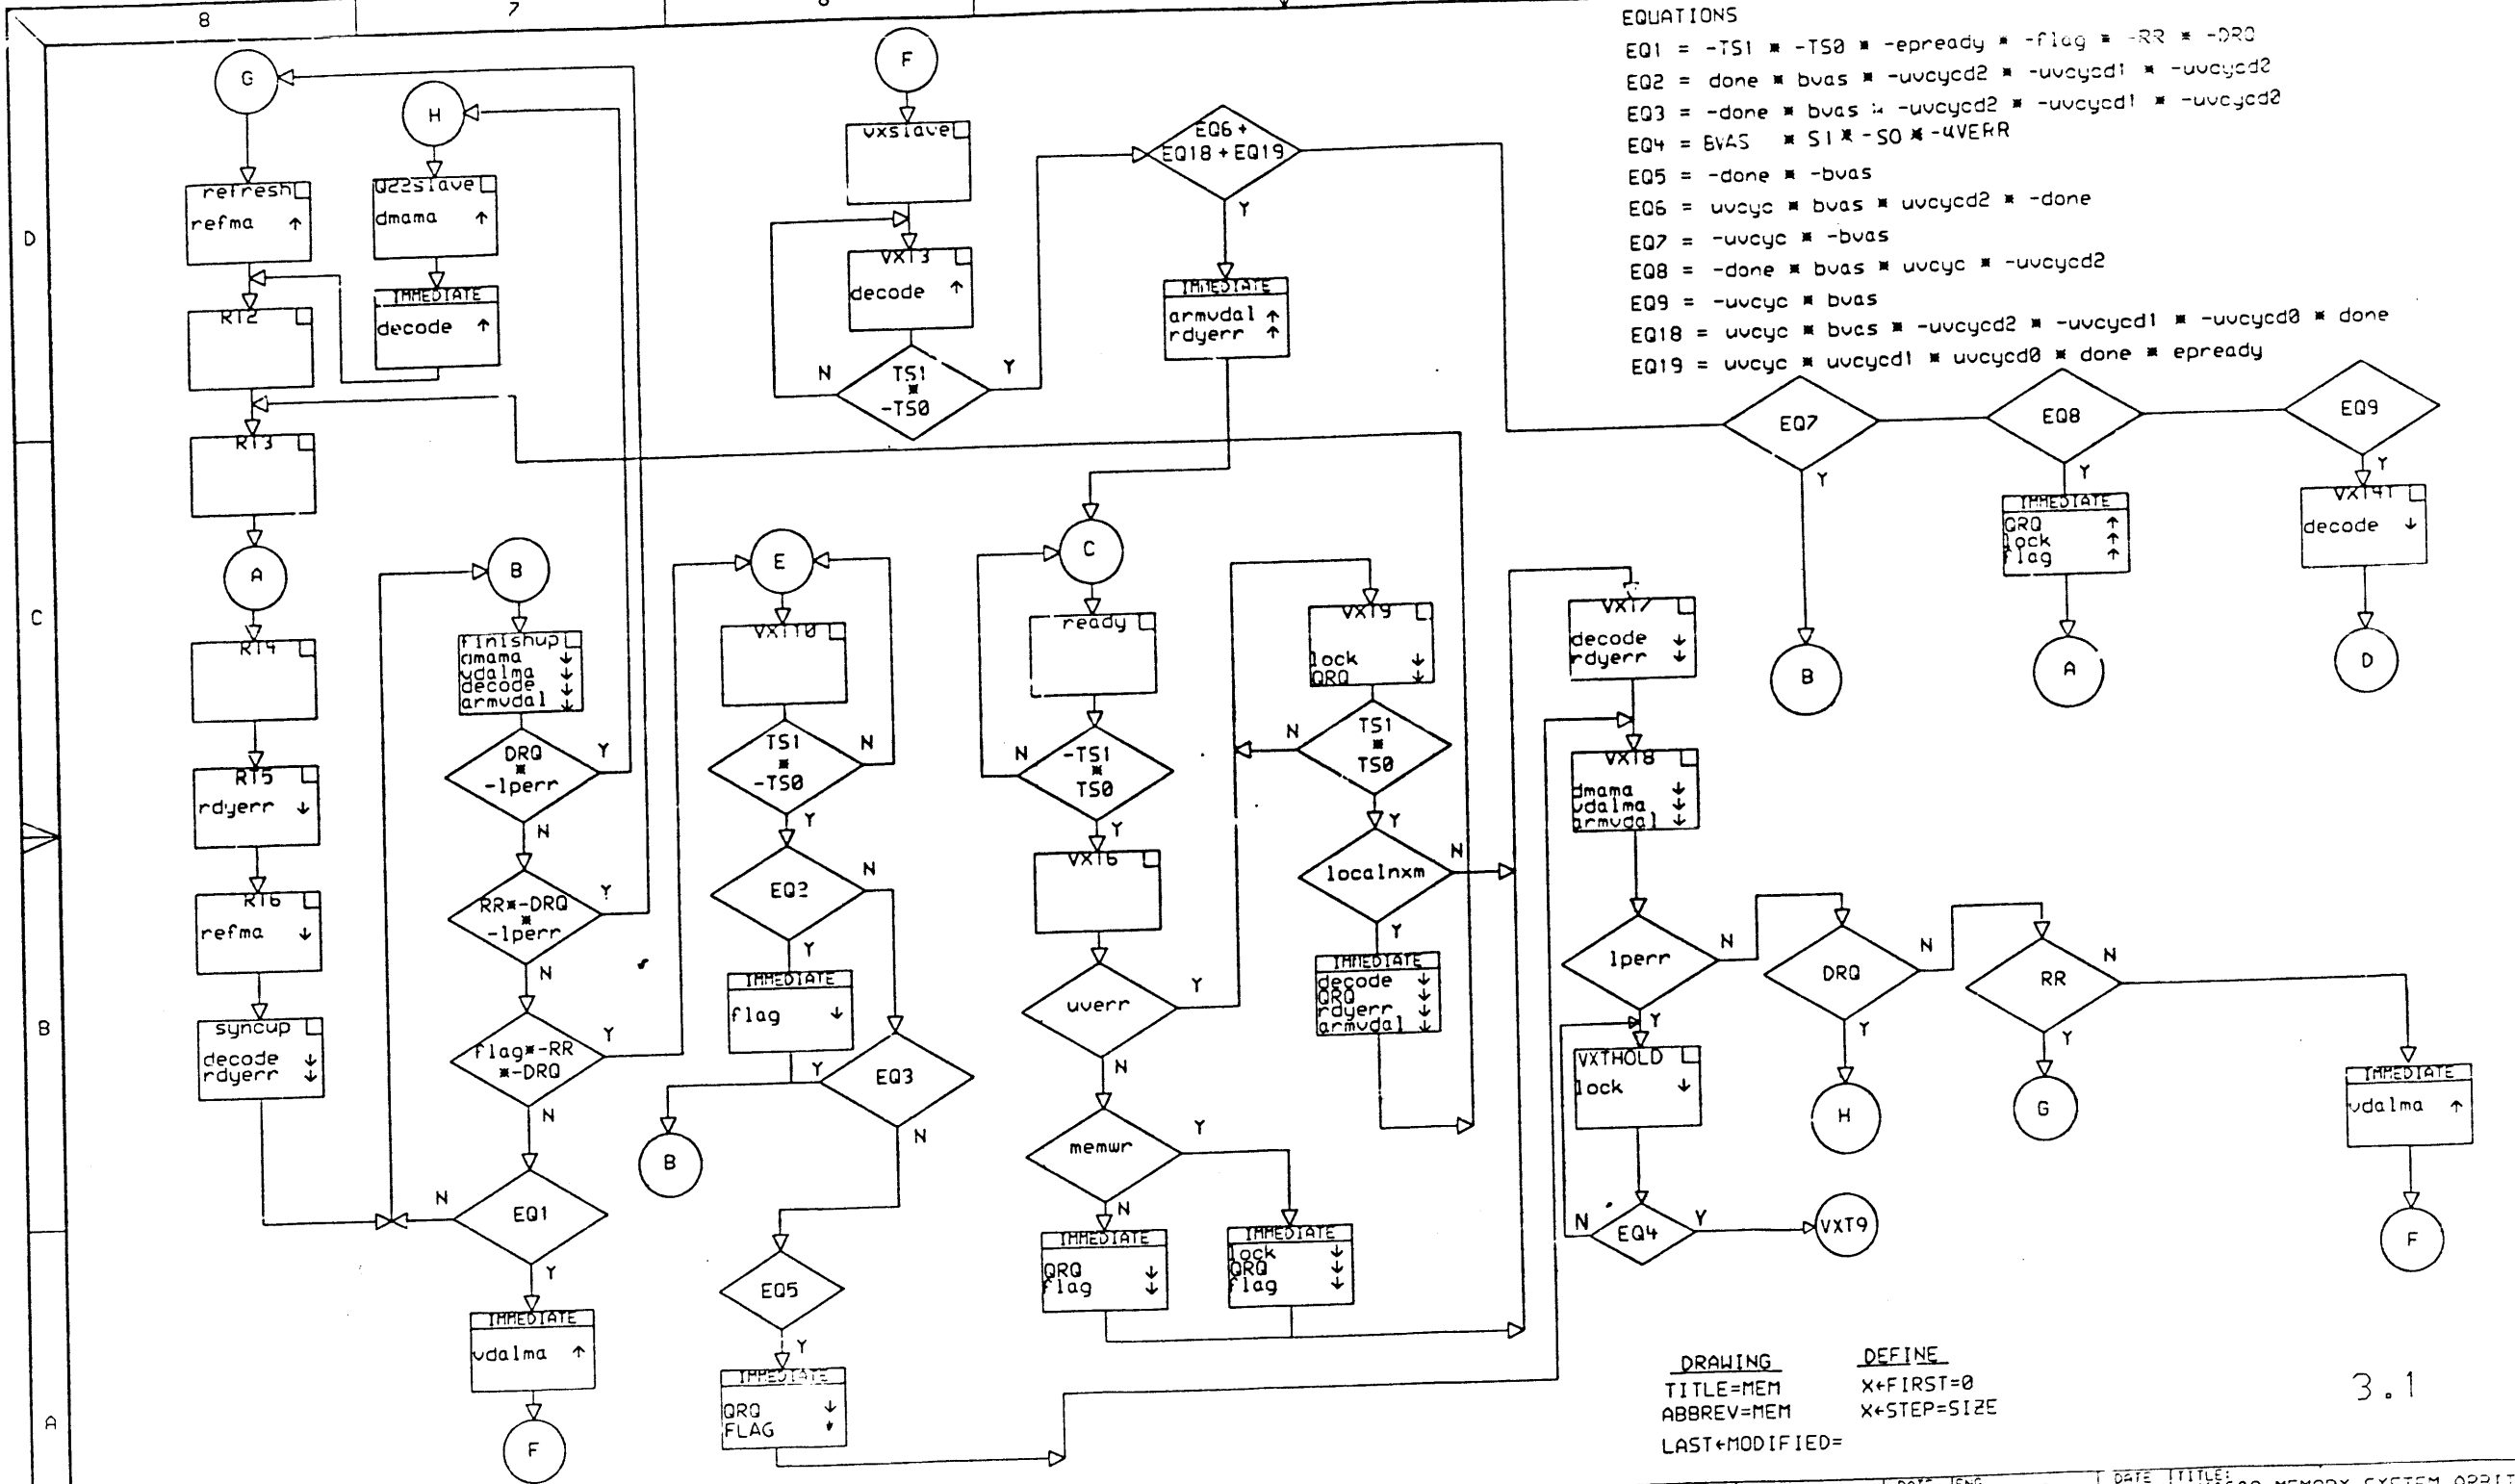

EQUATIONS
EQ1 = -TS1 * -TS0 * -epready * -flag * -RR * -DRQ
EQ2 = done * bvas * -uvcyd2 * -uvcyd1 * -uvcyd2
EQ3 = -done * bvas * -uvcyd2 * -uvcyd1 * -uvcyd2
EQ4 = bvas * S1 * -S0 * -4VERR
EQ5 = -done * -bvas
EQ6 = uvyc * bvas * uvcyd2 * -done
EQ7 = -uvyc * -bvas
EQ8 = -done * bvas * uvyc * -uvcyd2
EQ9 = -uvyc * bvas
EQ18 = uvyc * bvas * -uvcyd2 * -uvcyd1 * -uvcyd0 * done
EQ19 = uvyc * uvcyd1 * uvcyd0 * done * epready

DRAWING TITLE=MEM
ABBREV=MEM
LAST+MODIFIED=
DEFINE X+FIRST=0
X+STEP=SIZE

3.1

REVISION	CHK	CHANGE NO	REV

digital	DRN ERW	DATE 8-19-86	ENG ERW	DATE 8-19-86	TITLE KAS20 MEMORY SYSTEM CONTROLLER STATE FLOW DIAGRAMS
USRA:	CHK ERW	DATE 8-19-86	DATE 8-19-86	LOCATION:	SIZE CODE D CS
FIRST USED ON OPTION/MODEL:	TOP DOCUMENT NUMBER:	2			M7478-0-52
					REV. 3

D ICS M7478 0 52 A

NAME 23_014L3_00 ;KA630 LOCAL I/O CONTROL MACHINE revision 2
 OPTION PRESET
 INPUT NC1, -UVDALMA, -RDYERR, CSTOY, -CSPROM, -CSMAP, CSMAPEMEAR,
 INPUT -UVCYCD0, -UVCYCD1, NC0, UVWR, -DONE, -UVERR, TS0, TS1, BUVAS
 OUTPUT NC3, MAPDISABLE, EPDS, -EPAS, NC2, -HIROMDLATCH, -EPADENB, -EPREADY

MACHINE 23_014L3_00

STATE POWERUP
 GOTO ST1 [-MAPDISABLE, -EPDS, -EPREADY, -EPAS, -HIROMDLATCH]

STATE ST1, NUMBER LLHLL
 IF [TS1 = -TS0 = BUVAS = -UVERR] THEN ST2
 IF [TS1 = -TS0 = UVERR] THEN EXTEND

STATE ST2, NUMBER LLLHLL ;WHAT SHOULD RUN? IF Q22 BUS PUT ADDRESS ON EPR.
 IF [-UVERR = RDYERR = -UVCYCD1 = -UVCYCD0] THEN LOCALCYC [EPREADY]
 IF [-UVERR = -UVCYCD1 = -UVCYCD0 = CSTOY] THEN TOYCYC [EPADENB]
 IF [-UVERR = -UVCYCD1 = UVCYCD0 = CSPROM] THEN PROMCYC
 IF [-UVERR = UVCYCD1 = -UVCYCD0 = CSMAPEMEAR] THEN MAPCYC [EPADENB]
 IF [-UVERR = UVCYCD1 = -UVCYCD0 = CSMAPEMEAR] THEN MSERWCYC
 IF [-UVERR = -UVCYCD1 = -UVCYCD0 = -CSPROM = -CSMAPEMEAR] THEN EMEARCYC
 IF [-UVERR = -UVCYCD1 = -UVCYCD0 = -CSTOY = -CSMAPEMEAR = -RDYERR = -TS1 =
 -TS0] THEN AUTOCYC
 IF [-UVERR = ((UVCYCD1 = UVCYCD0) + (-UVCYCD1 = UVCYCD0 = -CSPROM))] THEN
 Q22CYC [EPADENB]
 IF [UVERR] THEN EXTEND

STATE EXTEND, NUMBER LLHLL
 IF [TS1 = -TS0] THEN MS1

STATE LOCALCYC ;FAST READY FLEW BY BUT EPREADY ASSERTS TO STROBE ERRORS.
 IF [-RDYERR = -UVDALMA] THEN ST1 [-EPREADY, -HIROMDLATCH, -EPAS]

STATE TOYCYC, NUMBER HLLHHM ;TOY CLOCK CYCLE
 GOTO TOYT0

STATE TOYT0, NUMBER HLLHLL ;ADDRESS SETUP TIME
 GOTO TOYT1 [EPAS] ;CHIP SELECT AND ADDRESS ARE STABLE SO GO TO IT.

STATE TOYT1, NUMBER HLLHLL
 GOTO TOYT2 ;ADDRESS HOLD TIME.

STATE TOYT2, NUMBER HLLHLL
 GOTO TOYT3 [-EPADENB]

STATE TOYT3, NUMBER HLLHLL
 GOTO TOYT4 ;PREVENT TRISTATE OVERLAP.

STATE TOYT4, NUMBER HLLHLL
 GOTO TOYT5 [EPDS] ;GET OR PUT THE DATA.

STATE TOYT5, NUMBER LLHLLM ;DELAY FOR DATA ACCESS TIME.
 IF [-TS1 = TS0] THEN TOYT6

STATE TOYT6, NUMBER LLLHLL ;TELL UVAX THAT CYCLE CAN FINISH.
 GOTO MS1 [EPREADY]

STATE PROMCYC ;PROM CYCLE
 IF [UVDALMA = CSPROM = RDYERR] THEN PROMT1 [EPAS] ;ADDRESS OK?

STATE PROMT1 ;DELAY FOR ACCESS TIME.
 IF [-TS1 = TS0] THEN PROMT2

STATE PROMT2 ;DELAY FOR ACCESS TIME, STROBE HI 16 BITS INTO LATCH.
 GOTO PROMT3 [HIROMDLATCH] ;CHANGE ADDRESS TO LO 16 BITS.

STATE PROMT3 ;DELAY FOR ACCESS TIME.
 IF [-TS1 = TS0] THEN PROMT4

STATE PROMT4, NUMBER HLLHLL ;TELL MEMORY MACHINE AND UVAX TO FINISH.
 GOTO MS1 [EPREADY]

STATE MAPCYC ;MAP CYCLE
 IF [RDYERR = DONE = TS1 = TS0] THEN MAPT1 [-EPADENB] ;HAVE THE Q22 BUS?

STATE MAPT1, NUMBER LLLHHM
 GOTO MAPT2 ;PREVENT TRISTATE OVERLAP.

STATE MAPT2, NUMBER LLLHLL ;READ OR WRITE CYCLE?
 IF [UVWR] THEN MAPT3 [MAPDISABLE] ;IF WRITE THEN 2 THE MAP OUTPUTS.
 IF [-UVWR] THEN MAPT3 [EPAS] ;IF READ THEN GET DATA ON EPR BUS.

STATE MAPT3, NUMBER HLLHLL
 GOTO MAPT4 ;DELAY ONE TICK TO SYNC UP.

STATE MAPT4, NUMBER HLLHLL ;TELL UVAX AND MEMORY MACHINE TO FINISH.
 GOTO MS1 [EPREADY]

STATE MAPT5
 GOTO MAPT6 ;PREVENT TRISTATE OVERLAP.

STATE MAPT6 ;ENABLE THE WRITE DATA.
 GOTO MAPT7 [EPAS]

STATE MAPT7 ;ASSERT THE WRITE STROBE.
 GOTO MAPT8 [EPDS]

STATE MAPT8 ;SYNC UP WITH UVAX AND MEMORY MACHINE.
 GOTO MSERWCYC [-EPADENB]

STATE MSERWCYC ;MSER WRITE CYCLE, GET THE Q22 BUS, STROBE THE DATA.
 IF [RDYERR = DONE = TS1 = TS0] THEN MS1 [EPREADY]

STATE MS1, NUMBER LLLHLL ;STROBE THE MSER DATA WITH EPREADY.
 IF [TS1 = TS0] THEN MS2 [-EPREADY]

STATE MS2
 GOTO POWERUP [-EPDS]

STATE EMEARCYC, NUMBER HLLHLL ;EXTERNAL MEAR CYCLE.
 GOTO EM1

STATE EM1, NUMBER HLLHLL ;ENABLE THE EPR DATA AND TELL UVAX TO FINISH.
 GOTO EM2 [EPAS, EPREADY]

STATE EM2, NUMBER HLLHLL
 GOTO MS1 [EPREADY]

STATE AUTOCYC ;NOTHING TO DO SO BACK FOR ANOTHER LOOK.
 GOTO ST1 [-EPREADY, -HIROMDLATCH, -EPAS, -EPADENB]

STATE Q22CYC ;Q22 BUS IAK OR Q22 BUS READ OR WRITE.
 IF [RDYERR] THEN Q22T1 [-EPADENB]

STATE Q22T1
 IF [RDYERR = DONE = TS1 = TS0] THEN Q22T2 [EPREADY]

STATE Q22T2 ;WAIT UNTIL MEMORY MACHINE IS DONE.
 IF [-RDYERR] THEN ST1 [-EPREADY, -HIROMDLATCH, -EPAS]


END

NOTE: THIS LOCAL I/O CONTROL MACHINE WAS FIRST USED
 ON THE KA630 (M7605).

THIS DRAWING AND SPECIFICATIONS
 HEREIN, ARE THE PROPERTY OF
 DIGITAL EQUIPMENT CORPORATION AND
 SHALL NOT BE REPRODUCED OR COPIED
 OR USED IN WHOLE OR IN PART AS
 THE BASIS FOR THE MANUFACTURE OR
 SALE OF ITEMS WITHOUT WRITTEN
 PERMISSION. COPYRIGHT © 1980,
 DIGITAL EQUIPMENT CORPORATION

REVISIONS		
CHK	CHANGE NO.	REV

digital	DRAWN: ERW	DATE: 8-14-80	ENG: ERW	DATE: 8-14-80	TITLE: LOCAL I/O CONTROL MACHINE LISTING
	CHK'D: ERW	DATE: 9-19-80	BOARD LOCATION: DE	REV: A	NUMBER: M7472-0-54
FIRST USED ON OPTION/MODEL:		NEXT HIGHER ASSEMBLY:		SI/PCODE: D CS	REV: A

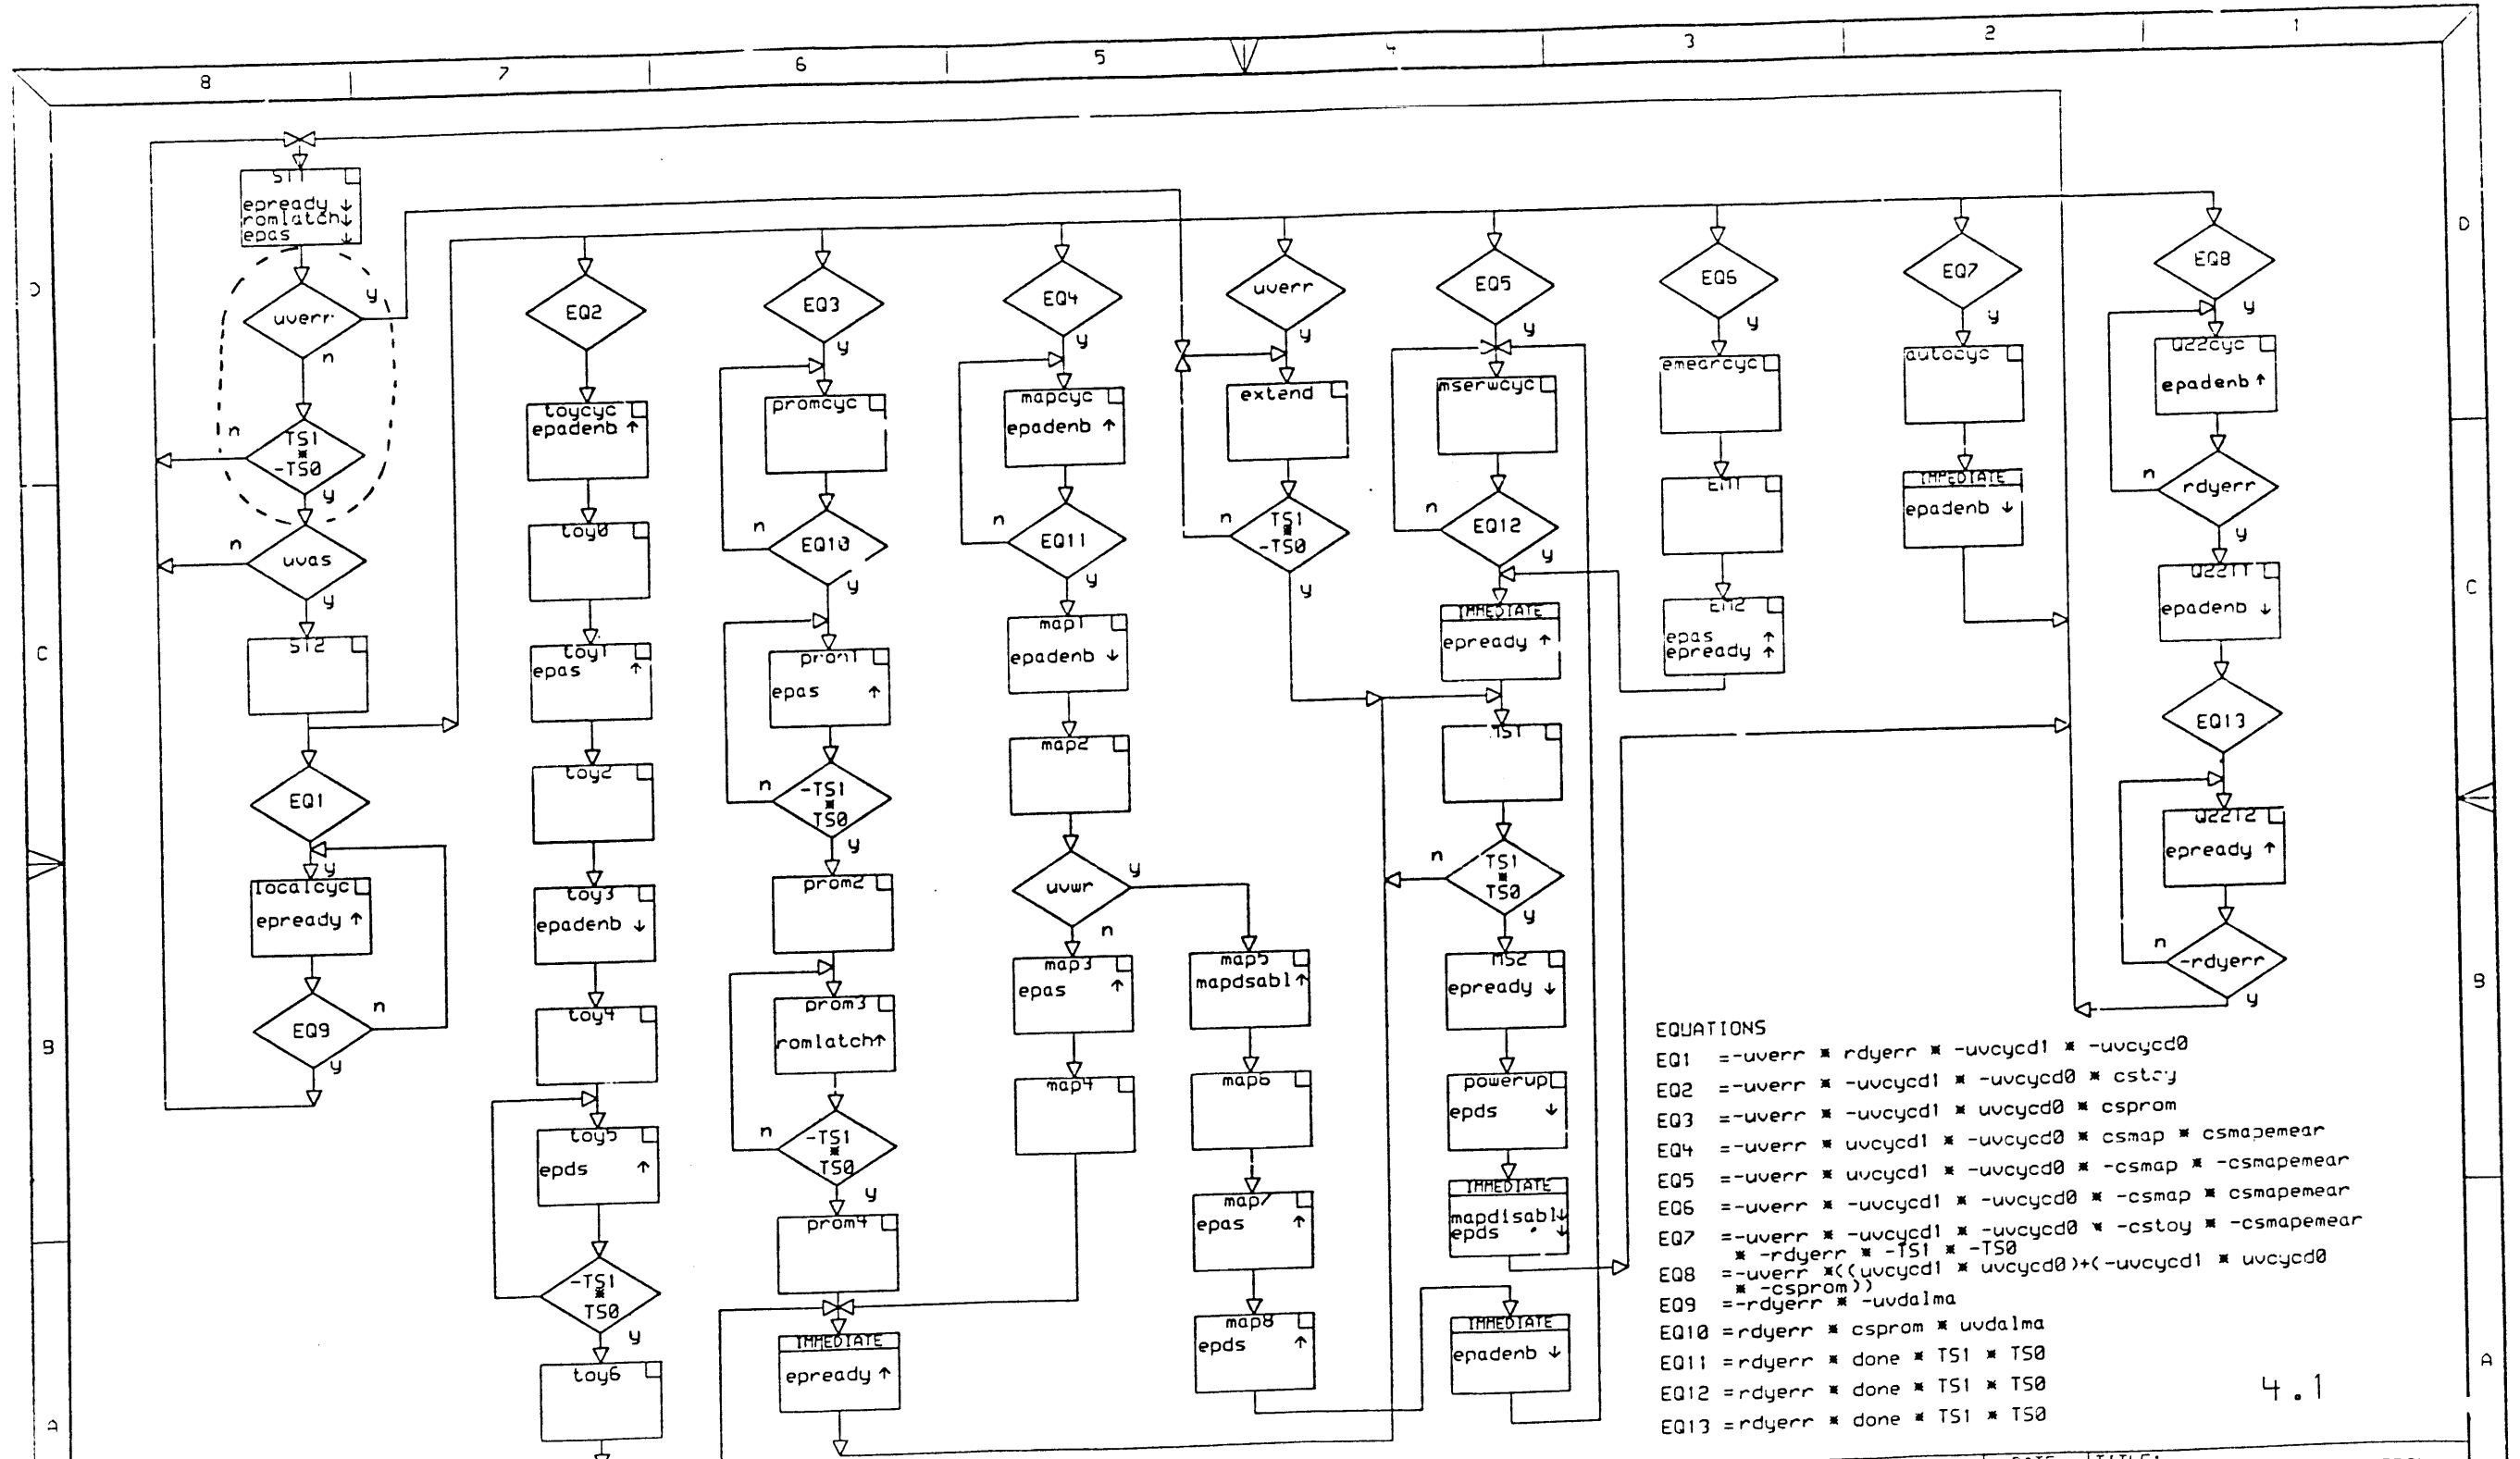

EQUATIONS

EQ1 = -u verr * rdyerr * -uvcycd1 * -uvcycd0

EQ2 = -u verr * -uvcycd1 * -uvcycd0 * cstrcy

EQ3 = -u verr * -uvcycd1 * uvcycd0 * csprpm

EQ4 = -u verr * uvcycd1 * -uvcycd0 * csmap * csmapemear

EQ5 = -u verr * uvcycd1 * -uvcycd0 * -csmap * -csmapemear

EQ6 = -u verr * -uvcycd1 * -uvcycd0 * -csmap * csmapemear

EQ7 = -u verr * -uvcycd1 * -uvcycd0 * -cstoy * -csmapemear

EQ8 = -u verr * (-rdyerr * -TS1 * -TS0 * -csprpm) * ((uvcycd1 * uvcycd0) + (-uvcycd1 * uvcycd0))

EQ9 = -rdyerr * -uvalma

EQ10 = rdyerr * csprpm * uvalma

EQ11 = rdyerr * done * TS1 * TS0

EQ12 = rdyerr * done * TS1 * TS0

EQ13 = rdyerr * done * TS1 * TS0

4.1

THIS DRAWING AND SPECIFICATIONS, HEREIN, ARE THE PROPERTY OF DIGITAL EQUIPMENT CORPORATION AND SHALL NOT BE REPRODUCED OR COPIED OR USED IN WHOLE OR IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION.

COPYRIGHT 1986 DIGITAL EQUIPMENT CORPORATION

REVISION HISTORY	
REV	TECO NUMBER DATE

DRAWING

TITLE=EPR


ADDRV=EPR

LAST*MODIFIED

DEFINE

X*FIRST=0

X*STEP=SIZE



DRN: ERW	DATE: 8-19-86	ENG: ERW	DATE: 8-19-86	TITLE: LOCAL I/O BUS CONTROL
CHK'D: ERW	DATE: 8-19-86	SHEET 1 OF 1	NEXT HIGHER ASSEMBLY:	TITLE: STATE MACHINE
				SIZE: D
				CODE: CS
				NUMBER: M7478-0 -55
				REV: A

8

7

6

5

4

3

2

96-0-0124 53 0
REV. 1000 1115

1

```

name 23-000L3-00_E20    Q22 bus arbitration control machine
input  nci15, -lock, -qrq, -arb, sdmgl, sdmr, srply, ssack,
input  ssync, nci6, t_o, -initrq, -done, nci2, nci1, nci0
output nco7, -grant, tdmgo, tsack, nci3, tdmr, tinit, -enb8641
machine q_bus_arb

```

```

state A
goto Q [-grant, -tdmgo, -tsack, -tdmr, tinit, -enb8641]

state B
if [-ssack & (arb + (-arb & sdmgl)) & (qrq + initrq) & (ssync + srply)] then D
if [-ssack & arb & qrq & -initrq & -ssync & -srply] then E [grant, -tdmr]
if [-ssack & arb & initrq & -ssync & -srply] then Q [tinit, -tdmr]
if [-ssack & (arb & sdmr) + (-arb & sdmgl) & -qrq & -initrq] then C [tdmgo]
if [-ssack & -arb & sdmgl & qrq & -initrq & -ssync & -srply] then E &
    [grant, -tdmr, tsack]
if [-ssack & -arb & sdmgl & initrq & -ssync & -srply] then Q &
    [tinit, -tdmr, tsack]
if [ssack & (qrq + initrq) + -arb & -sdmgl & (qrq + initrq)] then [tdmr]
if [ssack & -qrq & -initrq + -arb & -sdmgl & -qrq & -initrq + &
    arb & -qrq & -initrq & -sdmr] then [-tdmr]

```

```

state C
if [arb & ssack] then B [-tdmgo, -tsack, -tinit, -grant, enb8641]
if [arb & -ssack & t_o] then F [-tdmgo]
if [-arb & -sdmgl] then B [-tdmgo, -tsack, -tinit, -grant, enb8641]

```

```

state D
if [-ssync & -srply & arb & qrq & -initrq] then E [grant, -tdmr]
if [-ssync & -srply & arb & -qrq & -initrq] then E [-grant, -tdmr]
if [-ssync & -srply & arb & initrq] then Q [tinit, -tdmr]
if [-ssync & -srply & -arb & qrq & -initrq] then E [grant, tsack, -tdmr]
if [-ssync & -srply & -arb & -qrq & -initrq] then E [-grant, tsack, -tdmr]
if [-ssync & -srply & -arb & initrq] then Q [tinit, tsack, -tdmr]

```

```

state E
if [-qrq & -lock] then B [-tdmgo, -tsack, -tinit, -grant, enb8641]
if [-qrq] then [-grant]
if [qrq] then [grant]

```

```

state F
goto H

```

```

state H
goto J

```

```

state J
goto K

```

```

state K
goto L

```

```

state L
goto M

```

```

state M
goto N

```

```

state N
goto P

```

```

state P
goto B [-tdmgo, -tsack, -tinit, -grant, enb8641]

```

```

state Q
if [-initrq] then B [-tdmgo, -tsack, -tinit, -grant, enb8641]

```

END

THIS DRAWING AND SPECIFICATIONS
HEREIN ARE THE PROPERTY OF
DIGITAL EQUIPMENT CORPORATION AND
SHALL NOT BE REPRODUCED OR COPIED
OR USED IN WHOLE OR IN PART AS
THE BASIS FOR THE MANUFACTURE OR
SALE OF ITEMS WITHOUT WRITTEN
PERMISSION. COPYRIGHT © 1960,
DIGITAL EQUIPMENT CORPORATION.

REVISIONS		
CHK	CHANGE NO.	REV.

digital	DRN. ERW	DATE 8-19-66	ENG ERW	DATE 8-19-66	TITLE: Q22 BUS ARB. CTL MACHINE LISTING
	CHK'D ERW	DATE 8-19-66	BOARD LOCATION:	SHEET 1 OF 1	SIZE CODE NUMBER REV. D CS M7478-0-56 A
FIRST USED ON OPTION/MODEL:					NEXT HIGHER ASSEMBLY:

8

7

6


5

4

3

2

1

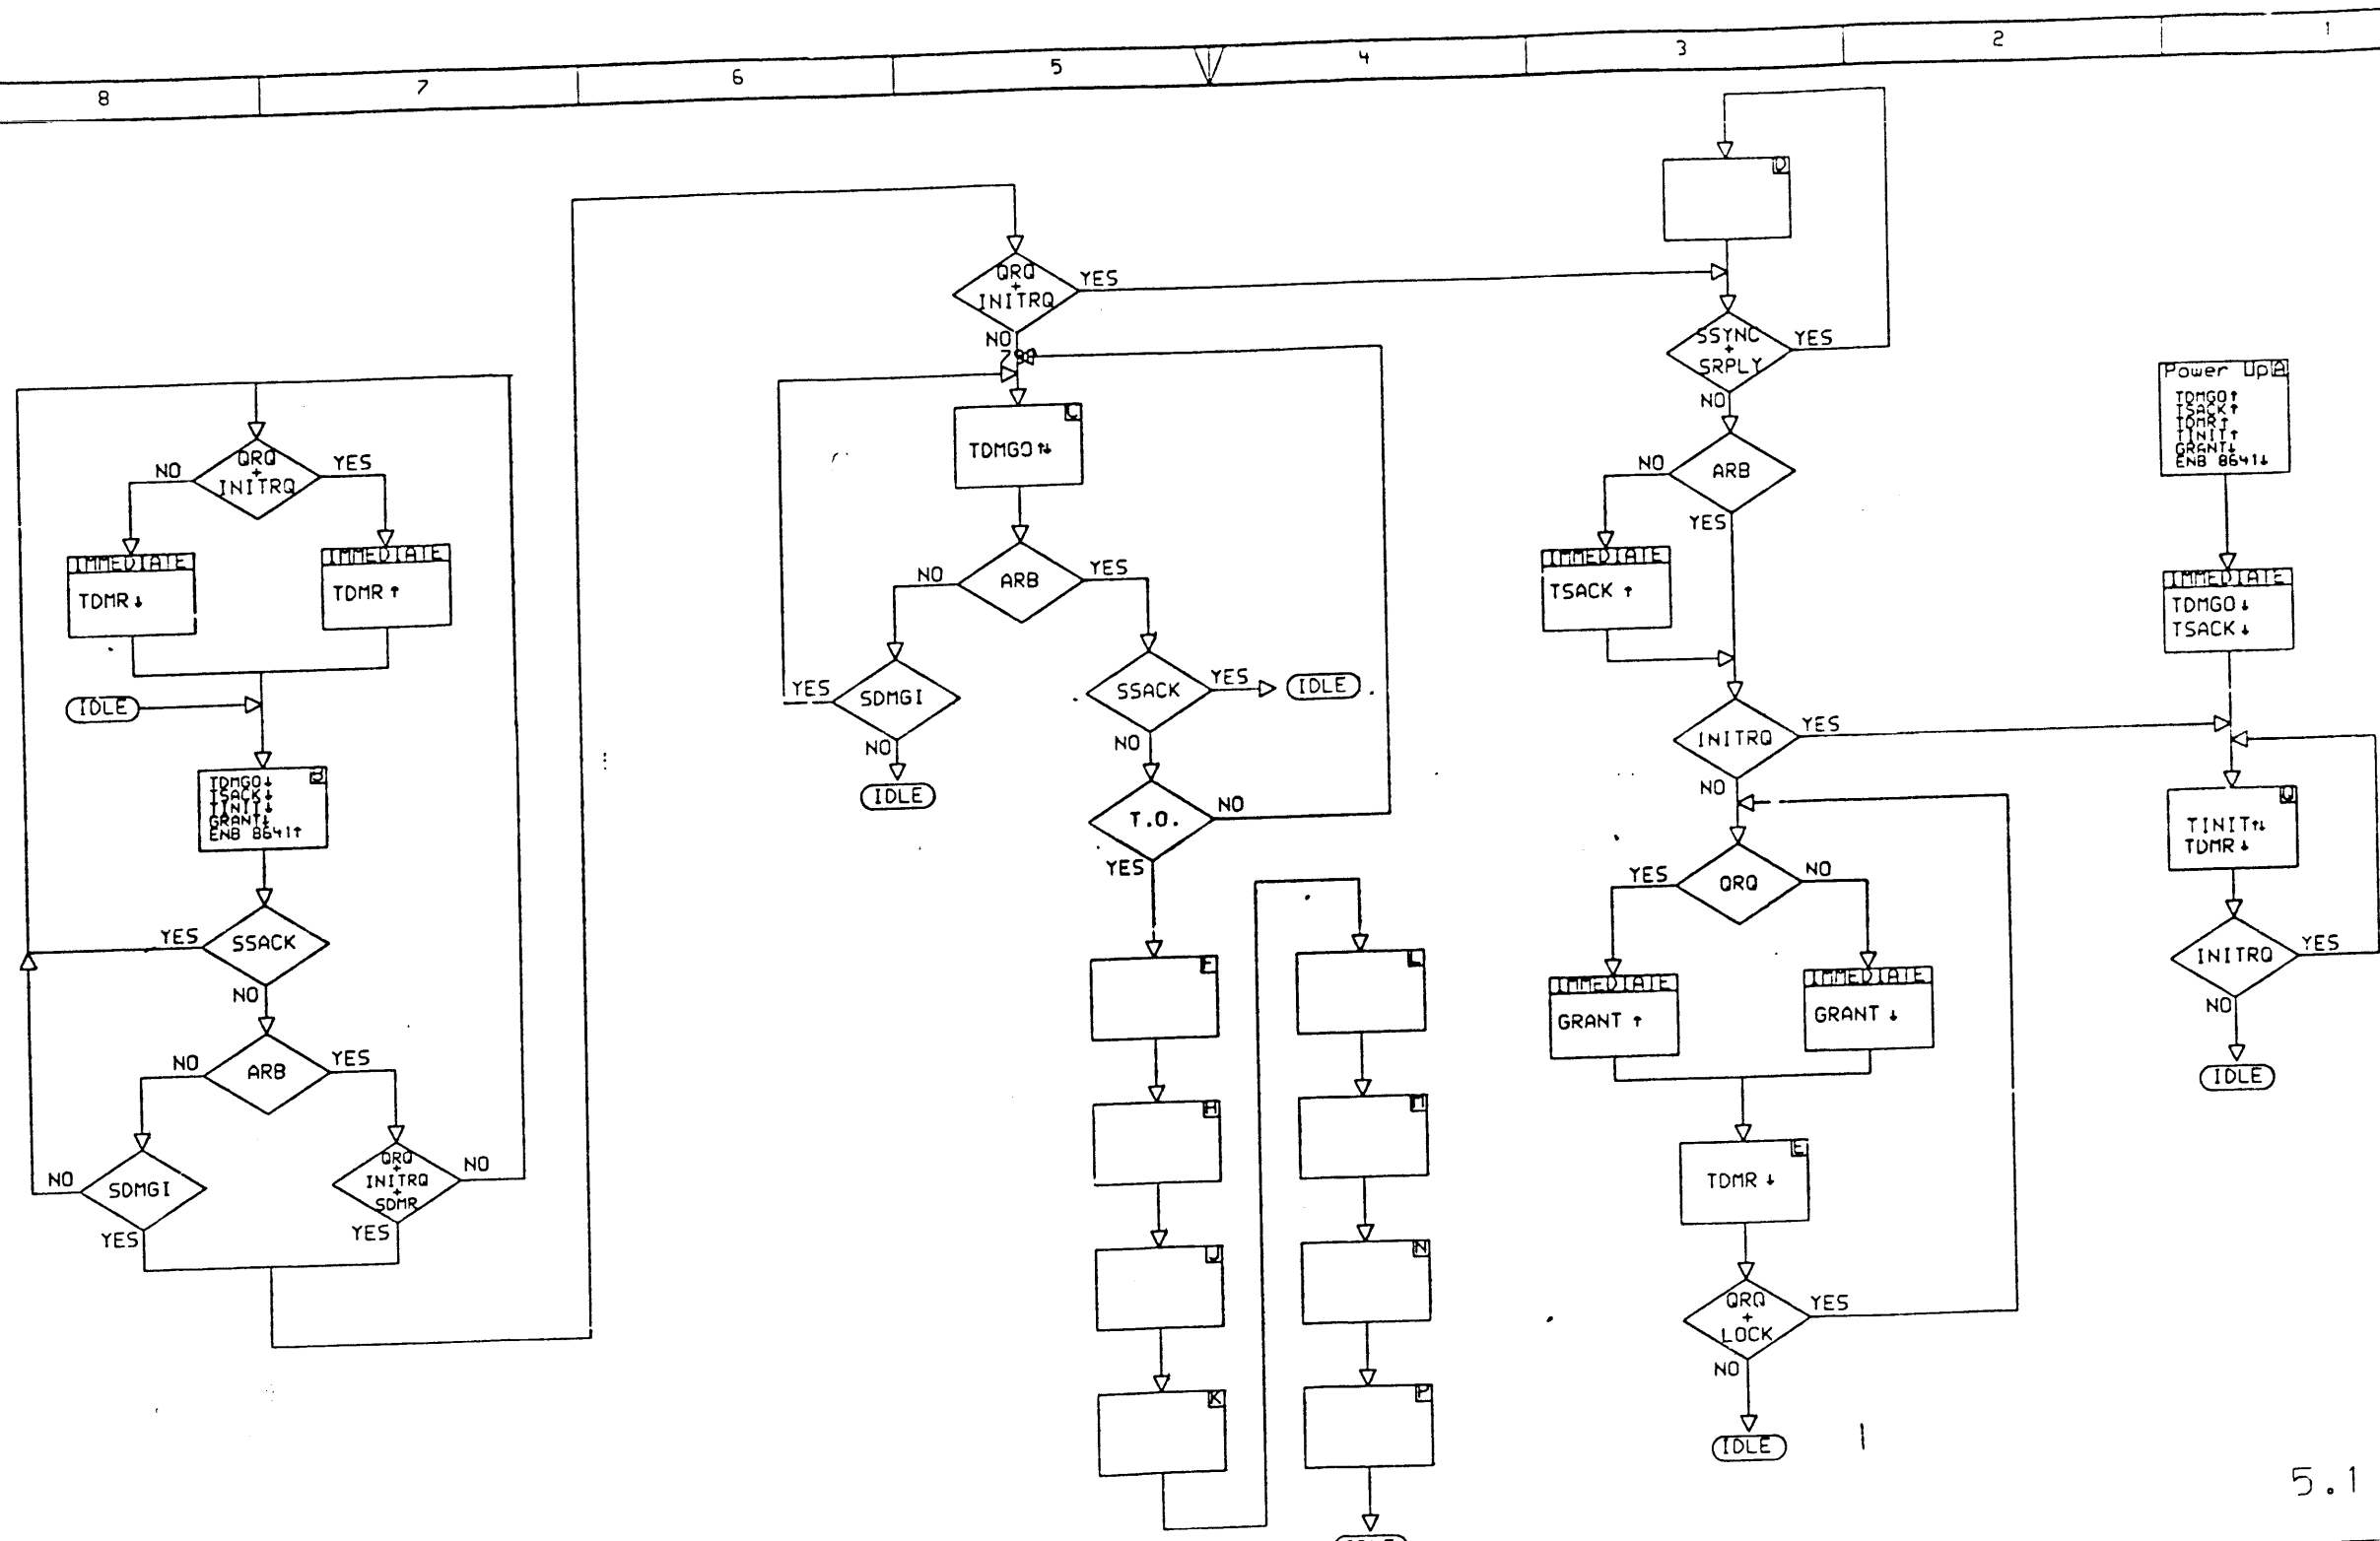


5.1

-THIS DRAWING AND SPECIFICATIONS, HEREIN, ARE THE PROPERTY OF DIGITAL EQUIPMENT CORPORATION AND SHALL NOT BE REPRODUCED OR COPIED OR USED IN WHOLE OR IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION.
 COPYRIGHT 1986 DIGITAL EQUIPMENT CORPORATION

REVISION HISTORY		
REV	TECO NUMBER	DATE

DRAWING
 TITLE=ARB
 ABBREV=arb
 LAST+MODIFIED=

DEFINE
 X+FIRST=0
 X+STEP=SIZE



DRN: ERW
 DATE: 8-19-86
 CHK'D: ERW
 DATE: 9-19-86

ENG: ERW
 DATE: 8-19-86
 SHEET: 1 OF 1
 NEXT HIGHER ASSEMBLY:

TITLE: OBUS ARBITRATION CONTROLLER
 DETAILED CONTROL FLOW DIAGRAM
 SIZE: D
 CODE: CS
 NUMBER: M7478-2-57
 REV: A

```

name 23_009L3_00_E26 1Q22 bus master cycle control machine
input nci15, -cd0, -cd1, -bm0, -bm1, -bm2, -bm3, uVWR
input valid, nci16, t_o, rref, srply, -grant, -qblocyc, qale
output nco7, -EnbDal, -EnbData, -tdio, nco3, tiako, tsync, -done
local first

machine q_bus_master
state A, number -hhhh
if [-grant] then B [first, -EnbDal, -EnbData, -done, -tdio, -tiako, -tsync]

state B, number -hhhl
if [grant == qale == (-cd1)] then P [EnbDal]
if [grant == qale == (-cd1 == -cd0)] then T
if [grant == qale == (-cd1 == cd0)] then C [tdio, -first]

state C, number -hhhl
goto D

state D, number -hhhl
goto E

state E, number -hhhh
goto F

state F, number -hhhh
goto H

state H, number -hhhh
goto J [tiako]

state J, number -hhhl
goto V

state K, number -hhhl
goto L

state L, number -hhhl
goto M

state M, number -hhhl
goto N [-EnbData, -tdio, -first]

state N, number -hhhl
if [-srply] then P [EnbDal, -tsync]

state P, number -hhhl
goto R

state R, number -hhhl
goto S

state S, number -hhhh
goto T

```

```

state T, number -hhhh
if [qale == (-cd0 + (valid == -qblocyc))] &
then AP [done]
if [qale == cd0 == (-valid + qblocyc)] &
then U [tsync]
if [qale == cd0 == valid == -qblocyc == -first] then [-tsync]
if [qale == cd0 == valid == -qblocyc == first] then [tsync, -first]

state U, number -hhhl
goto V

state V, number -hhhl
if [uVWR] then AB [EnbData]
if [-uVWR] then AJ [tdio, -EnbDal]

state AJ, number -hhhl
if [t_o + srply] then AK

state AK, number -hhhl
goto AL

state AL, number -hhhl
goto AM
if [-t_o] then [EnbData]

state AM, number -hhhl
if [-t_o == -uVWR == (bm2==bm1) == first == -rref] then N &
[-EnbData, -tdio, -tiako, -first]
if [t_o + uVWR + -(bm2==bm1) + -first + rref] then AN &
[-EnbData, -tdio, -tiako]

state AN, number -hhhl
if [-srply == -t_o == first == (bm2==bm1) == -uVWR] &
then V [-first]
if [-srply == -t_o == first == (bm2==bm1) == uVWR] &
then AB [-first, EnbData]
if [-srply == (t_o + -(bm2==bm1) + -first)] &
then AP [-tsync, done, -EnbDal]

state AP, number -hhhl
if [grant == -qblocyc == -qale] then S
if [-grant + qblocyc + qale] then A

state AB, number -hhhl
goto AC

state AC, number -hhhl
goto AD

state AD, number -hhhl
goto AE [tdio]

state AE, number -hhhl
if [t_o + srply] then AF

state AF, number -hhhl
if &
[-t_o == first == (bm2==bm1) == -((-uVWR + bm0 == bm3) == rref)] &
then K [-tdio]
if &
[t_o + -first + -(bm2==bm1) + rref == (-uVWR + bm0 == bm3)] &
then AH [-tdio]

state AH, number -hhhl
goto AL

END


```

THIS DRAWING AND SPECIFICATIONS
HEREIN ARE THE PROPERTY OF
DIGITAL EQUIPMENT CORPORATION AND
SHALL NOT BE REPRODUCED OR COPIED
OR USED IN WHOLE OR IN PART AS
THE BASIS FOR THE MANUFACTURE OR
SALE OF ITEMS WITHOUT WRITTEN
PERMISSION. COPYRIGHT © 1980
DIGITAL EQUIPMENT CORPORATION

REVISIONS		
CHK	CHANGE NO.	REV

digital	DRN. ERW	DATE 8-19-84	ENG. E. R. ...	DATE 8-19-84	TITLE: Q22 BUS MASTER CTL MACHINE LISTING
	CHK'D ERW	DATE 8-19-84	BOARD LOCATION: 1	SHEET 1	OF 1
FIRST USED ON OPTION/MODEL: DSK16, T2P(4,550)		NEXT HIGHER ASSEMBLY:		SIZE CODE D CS	NUMBER M7478-0-58
					REV. A

THIS DRAWING AND SPECIFICATIONS HEREIN ARE THE PROPERTY OF DIGITAL EQUIPMENT CORPORATION AND SHALL NOT BE REPRODUCED OR COPIED OR USED IN WHOLE OR IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION. COPYRIGHT © 1966 DIGITAL EQUIPMENT CORPORATION.

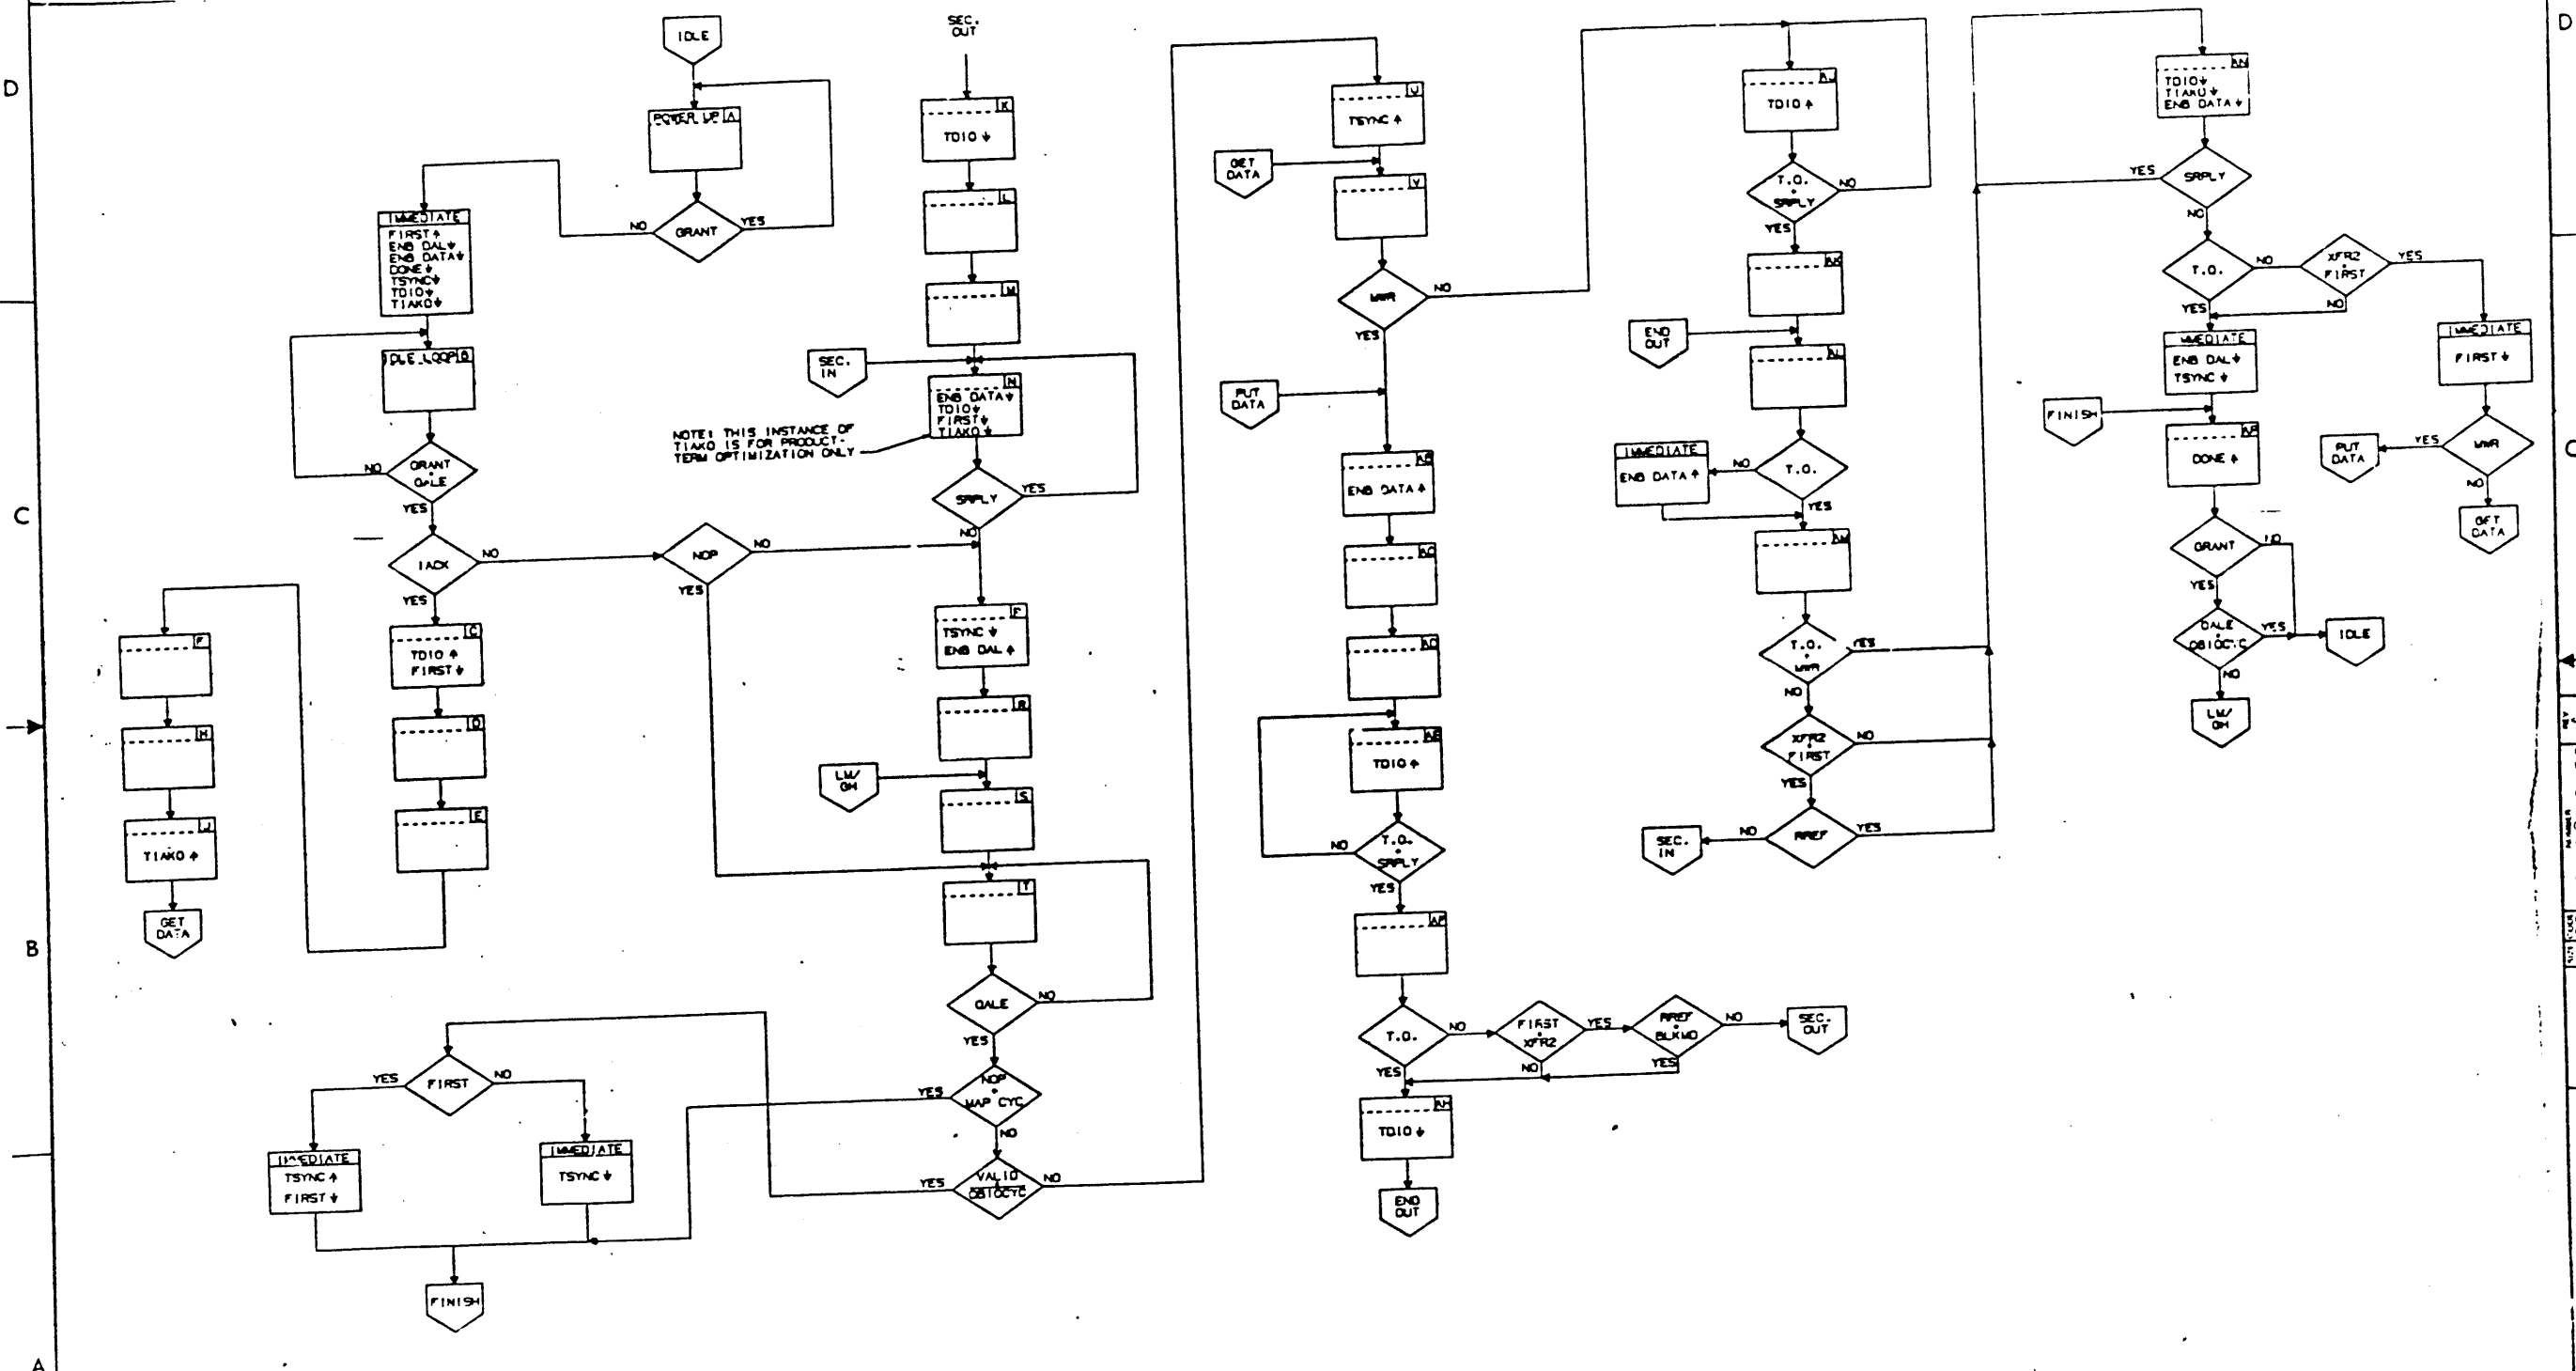

NOTE: THIS INSTANCE OF TIAKO IS FOR PRODUCT-TERM OPTIMIZATION ONLY.

REVISION HISTORY		
DATE	ECO NUMBER	REV

TITLE
Q22 BUS MASTER CONTROL
MACHINE FLOW DIAGRAM

DOCUMENT NUMBER		
SIZE CODE	NUMBER	REV
DCS	M7478-0-59	A
SCALE	1/1	SHEET 1 OF 1


```

name 23_010L3_00_E33    Q22 bus slave cycle control machine

input  -drq, -dmaMA, selcol, -bdy16, oddwd, -sel_db, qwr, -QMemEnb
input  valid, ncl6, xwtbt, rbs7, sdout, sdin, ssync, -done

output nco7, DC021rcv, nco5, qale, nco3, incctr, -armreply, -drq

local flag

machine q_bus_slave

state AA, number -hhhhh
goto A [DC021rcv, -drq, qale, -armreply, -flag]

state A, number -11111
if [-dmaMA] then A2 [qale]

state A2, number -1h111
goto B [-incctr]

state B1, number -1h111
goto C [armreply]

state C, number -11h11
always [-armreply]
if [-ssync # flag] then K [drq]
if [-ssync # -flag] then A &
    [DC021rcv, -armreply, -flag, -drq]
if [ssync # sdout # -dmaMA # -xwtbt # -bdy16 # -oddwd] then D [incctr, flag]
if [ssync # sdout # -dmaMA # (xwtbt + bdy16)] then E [drq, flag, incctr]
if [ssync # sdout # -dmaMA # -xwtbt # -bdy16 # oddwd] then E &
    [drq, -flag, incctr]

state D
if [-sdout] then B1 [-incctr]

state E, number -11h1h
always [-armreply]
if [dmaMA] then [-drq]
if [-sdout] then J
if [sdout # dmaMA # selcol] then F

state F
if [-sdout] then H [-incctr]

state H, number -h1h1h
if [-ssync] then A [DC021rcv, -armreply, -flag, -drq]
if [ssync # -flag] then C [armreply]

state J, number -h11h1
if [dmaMA] then [-drq]
if [-ssync] then K
if [ssync # dmaMA # selcol] then J1

state J1, number -h11h1
goto H [-incctr]

state K, number -111h1
if [dmaMA + -drq] then A [DC021rcv, -armreply, -flag, -drq]

state L1, number -1h1hh
goto M [armreply]

```

```

state M, number -11hhh
always [-armreply]
if [-sdin # -sdout] then N [DC021rcv]

state N, number -111h1
if [-ssync] then A [DC021rcv, -armreply, -flag, -drq]
if [ssync # sdin # -flag] then L1 [-DC021rcv, flag]
if [ssync # -(sdin # -flag) # sdout] then M [armreply, flag]

state P, number -h1111
if [dmaMA] then [-drq]
if [-ssync] then K
if [ssync # dmaMA # selcol] then R

state R, number -h1111
goto R1 [-incctr]

state R1, number -h1h1h
goto R2 [-DC021rcv]

state R2, number -1h1h1
goto S [armreply]

state S, number -11h1h1
always [-armreply]
if [-ssync] then A [DC021rcv, -armreply, -flag, -drq]
if [ssync # sdin # bdy16] then U
if [ssync # sdin # -bdy16] then T [incctr]

state T
if [-sdin # -rbs7] then V &
    [-incctr, DC021rcv, qale]
if [-sdin # rbs7 # oddwd] then S &
    [-incctr, armreply]
if [-sdin # rbs7 # -oddwd] then P &
    [-incctr, DC021rcv, drq]

state U
if [-sdin] then V [DC021rcv, qale]

state V, number -h1h1h
if [-ssync] then A [DC021rcv, -armreply, -flag, -drq]
if [ssync # sdout] then V1 [-qale]

state V1, number -1h1h1
goto E [armreply, flag, drq]

state B, number -1h1h1
if [-done # ssync # -sel_db # QMemEnb] then B1A
if [-done # ssync # -sel_db # -QMemEnb] then H [flag, -incctr]
if [-done # ssync # sel_db] then N [-qale, DC021rcv]
if [done # dmaMA] then AA [-qale]

state B1A
if [-valid] then H [flag, -incctr]
if [valid # -qwr] then P [-qale, drq]
if [valid # qwr] then B1 [-qale, -incctr]

END


```

THIS DRAWING AND SPECIFICATIONS ARE THE PROPERTY OF DIGITAL EQUIPMENT CORPORATION AND SHALL NOT BE REPRODUCED OR COPIED OR USED IN WHOLE OR IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION. COPYRIGHT © 1985, DIGITAL EQUIPMENT CORPORATION.

REVISIONS	
CHK	CHANGE NO. REV

digital	DRN E.R.W.	DATE 8-14-85	EMG E.R.W.	DATE 8-14-85	TITLE: Q22 BUS SLAVE CTL MACHINE LISTING
	CHK'D E.R.W.	DATE 8-14-85	DATE 8-14-85	BOARD LOCATION: 1 OF 1	SIZE CODE D CS
FIRST USED ON OPTION/MODEL: 189-AUG-85 02:39 NEXT HIGHER ASSEMBLY:				NUMBER M773-0-60	REV. A

THIS DRAWING AND SPECIFICATIONS HEREIN ARE THE PROPERTY OF DIGITAL EQUIPMENT CORPORATION AND SHALL NOT BE REPRODUCED OR COPIED OR USED IN WHOLE OR IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION. COPYRIGHT © 1965 DIGITAL EQUIPMENT CORPORATION.

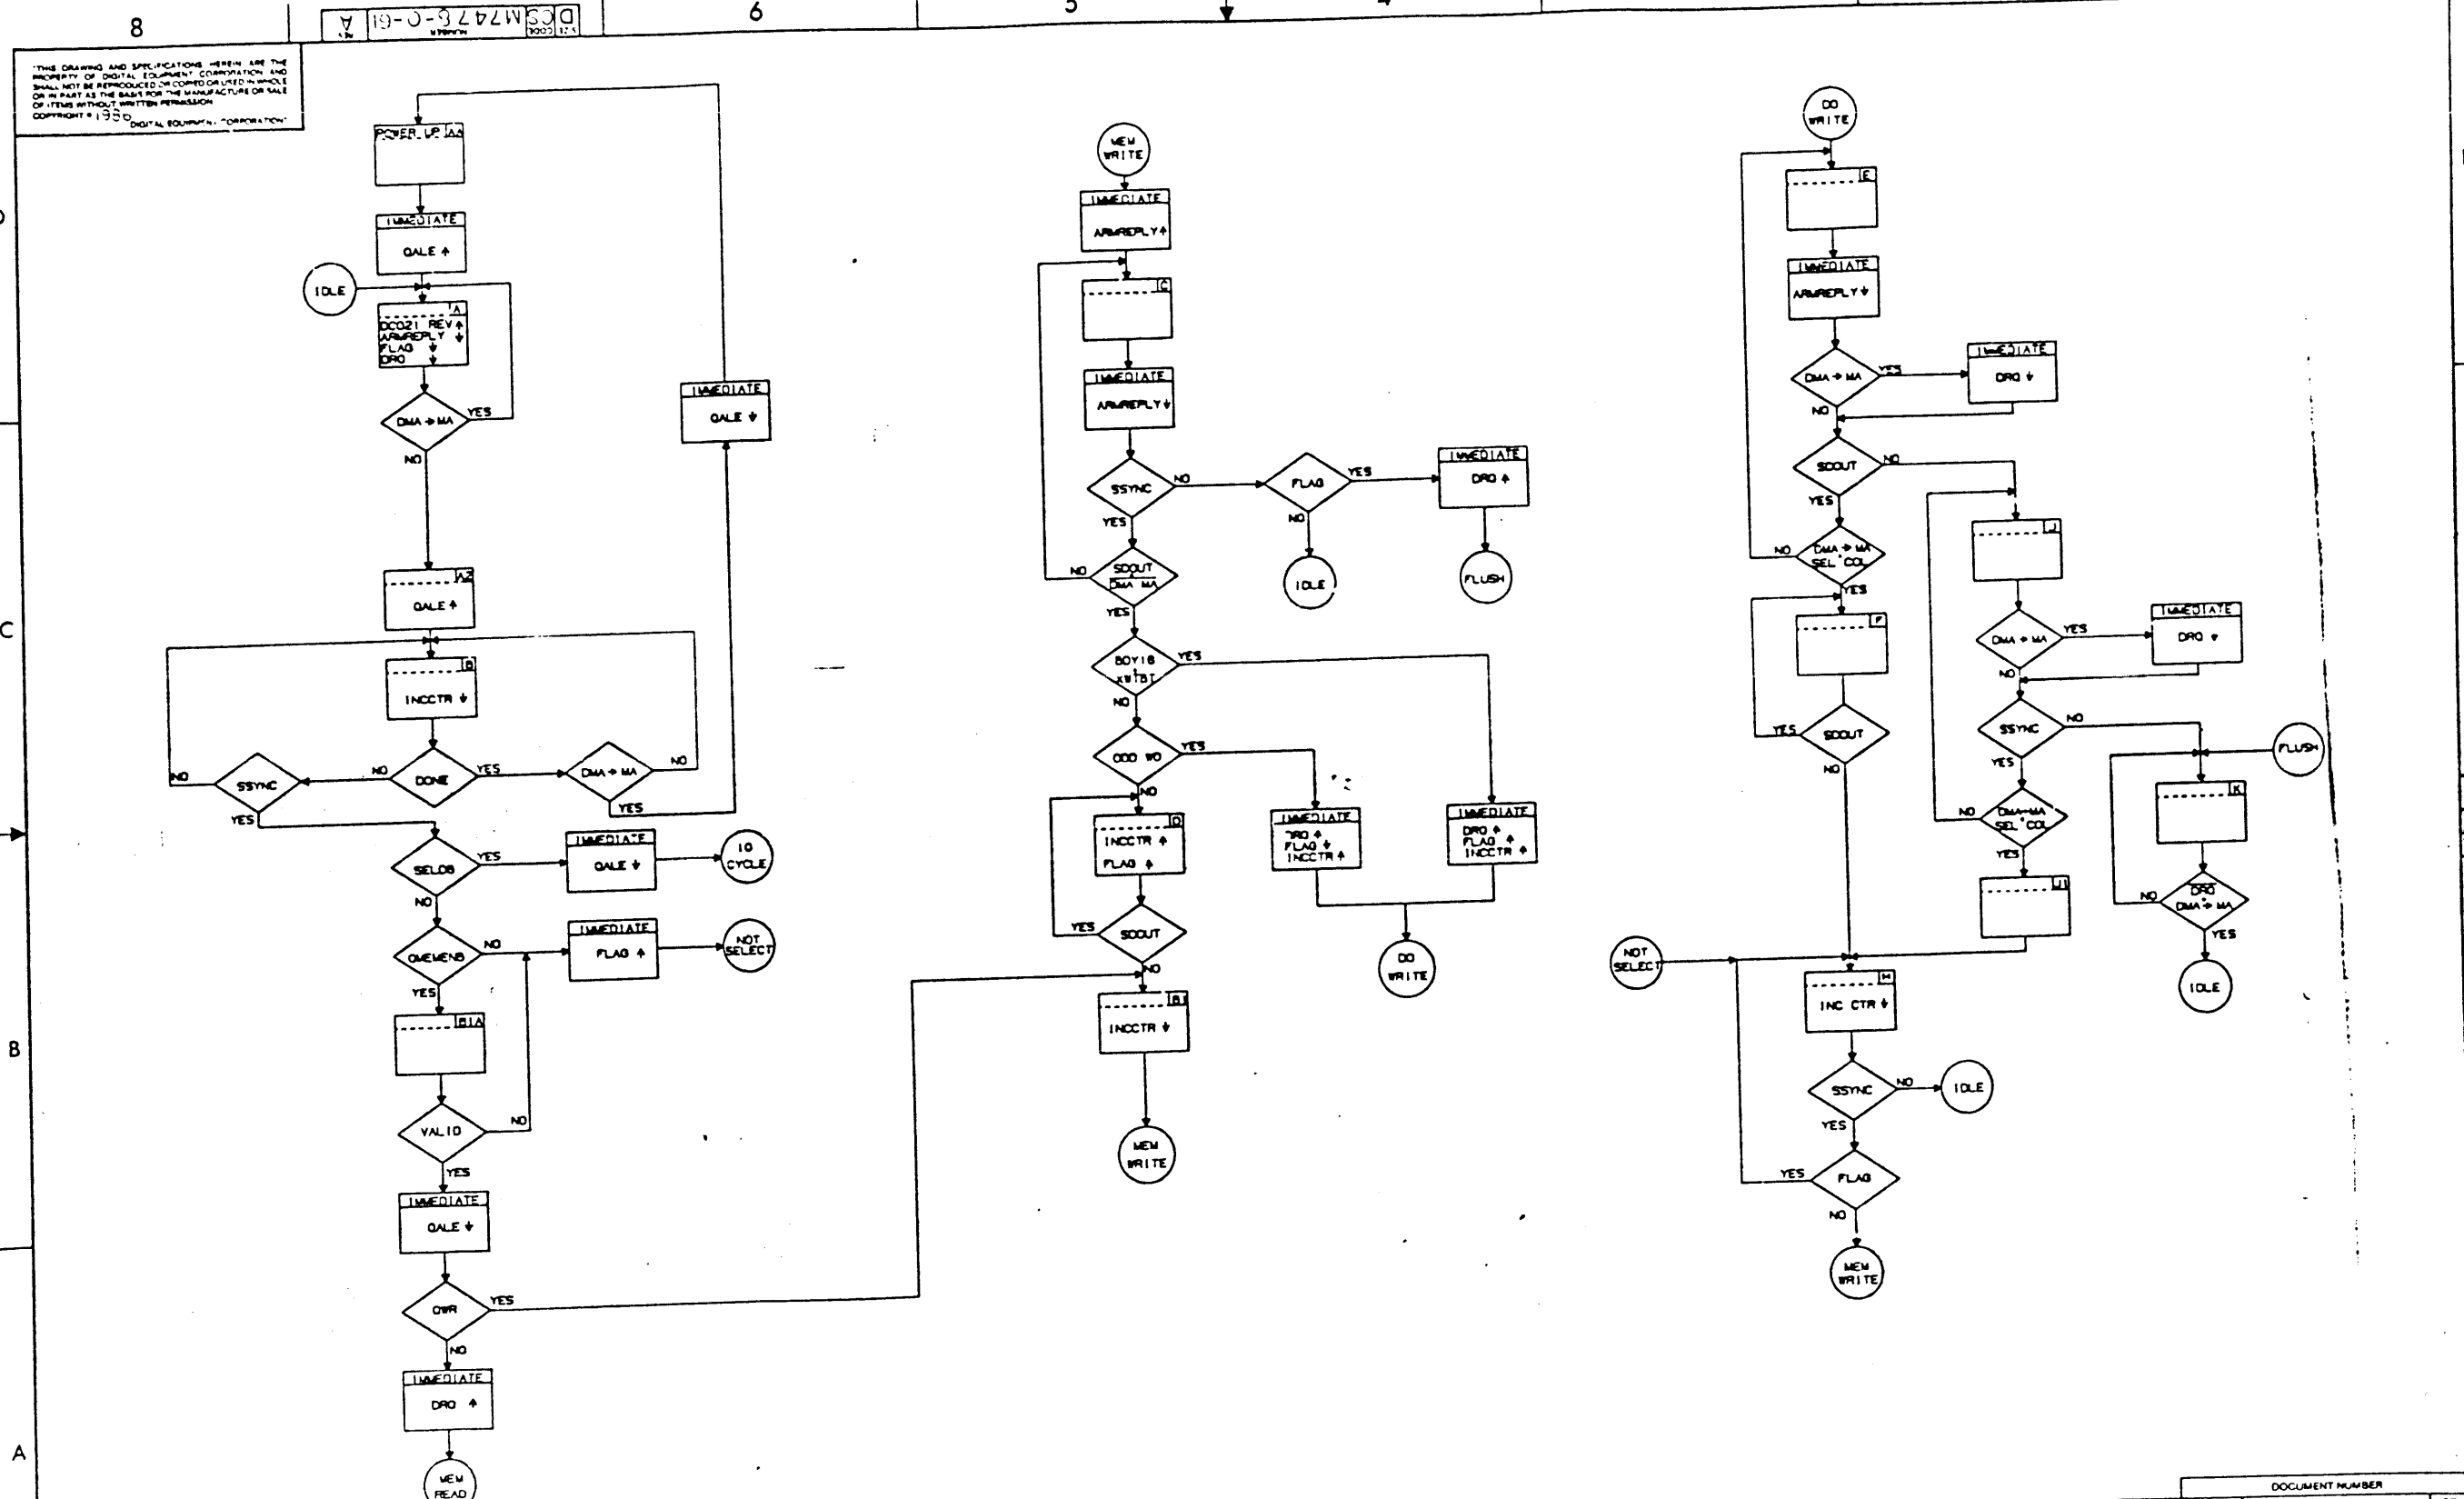


REVISION HISTORY			DOCUMENT NUMBER	
DATE	EOC NUMBER	REV	SIZE CODE	NUMBER
			DCSM7478-0-61	A
			SCALE 1/1	SHEET 1 OF 1

8 7 6 5 4 3 2 1

8 7 6 5 4 3 2 1

DCSM7478-0-61 A

THIS DRAWING AND SPECIFICATIONS HEREIN ARE THE PROPERTY OF DIGITAL EQUIPMENT CORPORATION AND SHALL NOT BE REPRODUCED OR COPIED OR USED IN WHOLE OR IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION. COPYRIGHT © 1968 BY DIGITAL EQUIPMENT CORPORATION.

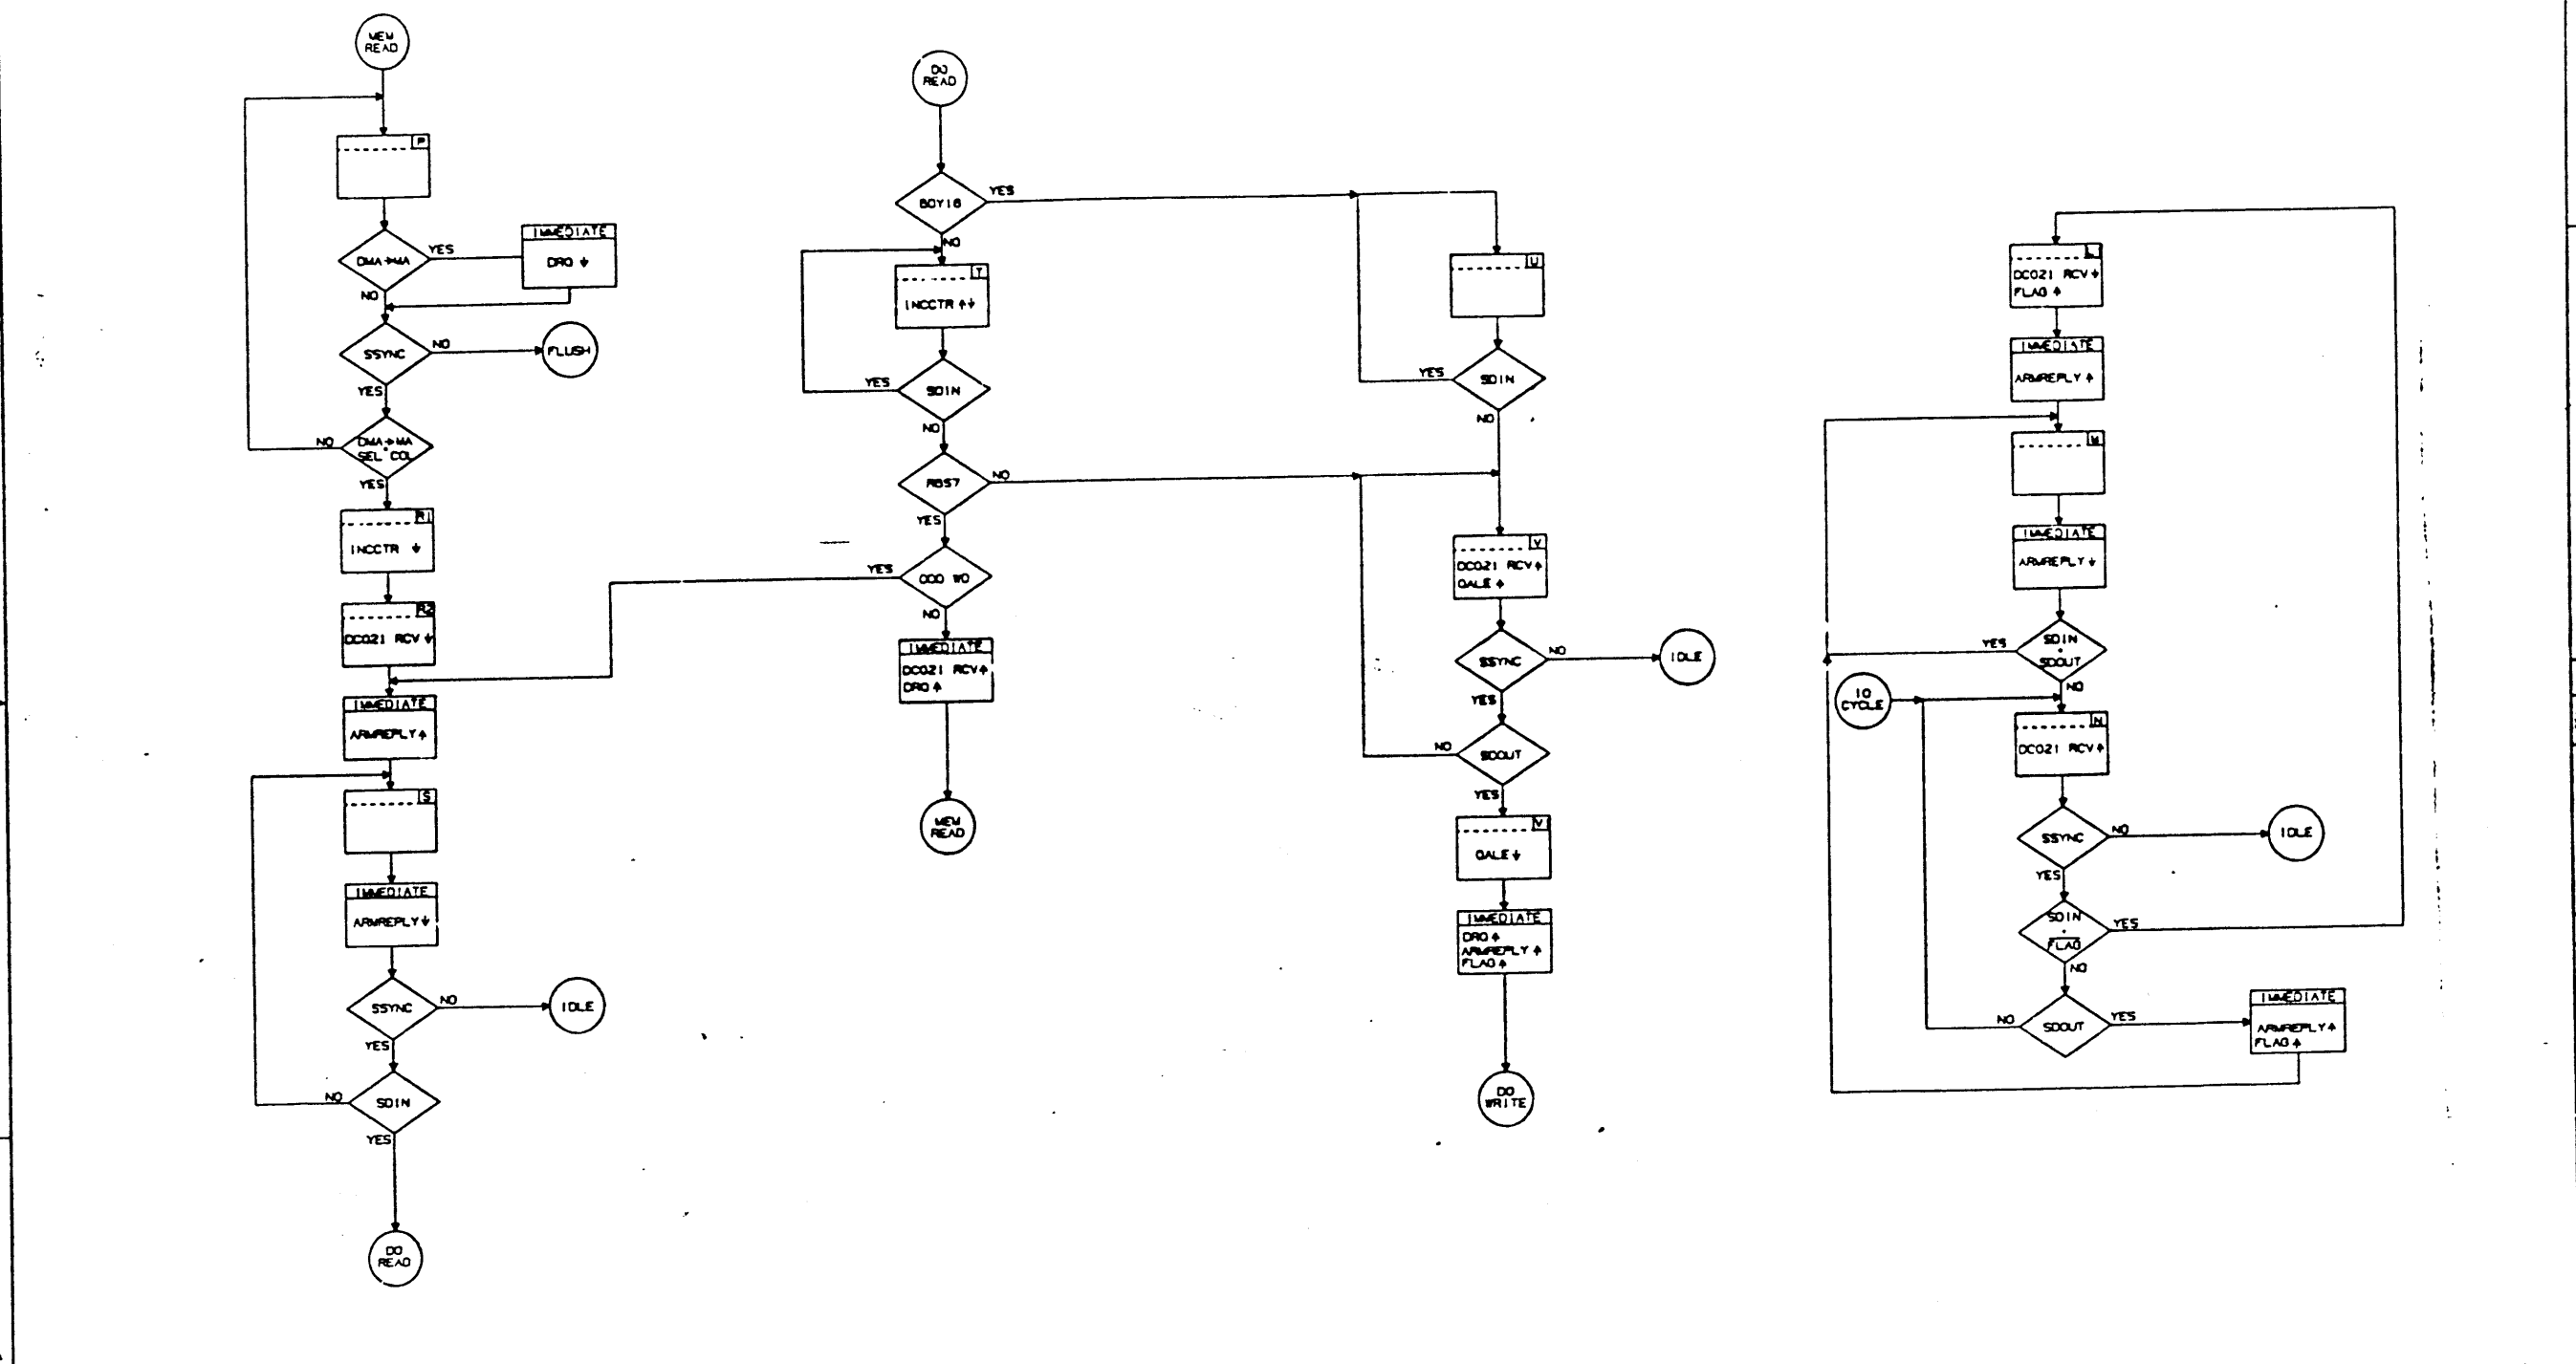

REVISION HISTORY		
DATE	ECO NUMBER	REV

TITLE
Q22 BUS SLAVE CONTROL
MACHINE FLOW DIAGRAM

DOCUMENT NUMBER		
SIZE CODE	NUMBER	REV
DCS	M7478-C-62	A
SCALE 1/1	SHEET / /	OF / /

DCS M7478 0-C2 A


```

T: PAL16L8A
P: 23-169J5-00 E48
N: BARRY MASKAS
D: 25 OCT 1984
S: /RPOK /BTRYOK /CSMAPEMEAR /EPAS /EPDS /UVWR /DONE /DALE /GRANT
  GND /SRPLY /CLRPSH /ENBLS646 /WRMAP /ENBBDAL /RDIN /DC821RCV /TDIO
  /RCVBDALH /VCC
B: IF [VCC] CLRPSH = RPOK + BTRYOK
  IF [VCC] ENBLS646 = CSMAPEMEAR + EPAS
  IF [VCC] WRMAP = CSMAPEMEAR + UVWR + EPDS
  IF [VCC] ENBBDAL = /GRANT + /RDIN + /DONE +
  GRANT + /DONE + DALE + /DC821RCV + /GRANT + /DONE
  IF [VCC] RCVBDALH = /TDIO + /DC821RCV + /TDIO + GRANT +
  /SRPLY + /DC821RCV + /SRPLY + GRANT + UVWR + /DC821RCV +
  UVWR + GRANT
E: KA630-A, -B, -C, -D (M7606) MISC. CONTROL STROBES

T: PAL16L8A
P: 23-170J5-00 E78
N: BARRY MASKAS
D: 25 OCT 1984
S: /PE3 /PE2 /PE1 /PE0 /MSER0 /MEMWR /BYTACT3 /BYTACT2 /BYTACT1
  GND /BYTACT0 /HI16PER /LO16PER /PERR /SELCOL /ENBCAS0H /ENBCAS1H
  /ENBCAS2H /ENBCAS3H /VCC
B: IF [VCC] HI16PER = MSER0 + PE2 + BYTACT2 + MSER0 + PE3 + BYTACT3
  IF [VCC] LO16PER = MSER0 + PE0 + BYTACT0 + MSER0 + PE1 + BYTACT1
  IF [VCC] PERR = MSER0 + /MEMWR + PE0 + BYTACT0 + MSER0 + /MEMWR +
  PE1 + BYTACT1 + MSER0 + /MEMWR + PE2 + BYTACT2 + MSER0 + /MEMWR +
  PE3 + BYTACT3
  IF [VCC] ENBCAS0H = /SELCOL + /BYTACT0
  IF [VCC] ENBCAS1H = /SELCOL + /BYTACT1
  IF [VCC] ENBCAS2H = /SELCOL + /BYTACT2
  IF [VCC] ENBCAS3H = /SELCOL + /BYTACT3
E: KA630-A, -B, -C, -D (M7606) MEMORY SYSTEM CAS CONTROL STROBES AND
  PARITY ERROR DETECTION STROBES

T: PAL16L8A
P: 23-171J5-00 E86
N: BARRY MASKAS
D: 25 OCT 1984
S: /UVCYCCD2 /DMAMA /DONE /MSER1 /UVCYC /MEMWR /DECODE /DATABUFENB
  MEMCD0 /GND /MEMCD1 /MSWT0H /MSWT1H /SELCOL /BUFENB /BUFEN00 /BUFENB1
  /BDIRT /STARTCYC /VCC
B: IF [VCC] MSWT0H = /MEMCD1 + MEMCD0 + /MEMWR + /UVCYC
  IF [VCC] MSWT1H = MEMCD1 + /MEMWR + /UVCYC
  IF [VCC] BUFENB = MEMCD1 + /MEMCD0 + /MEMWR + SELCOL + /DMAMA +
  MEMCD1 + /MEMCD0 + /MEMWR + DATABUFENB + MEMCD1 + MEMCD0 + MEMWR +
  UVCYC + MSER1
  IF [VCC] BUFEN00 = /MEMCD1 + MEMCD0 + /MEMWR + SELCOL + /DMAMA +
  /MEMCD1 + MEMCD0 + /MEMWR + DATABUFENB + /MEMCD1 +
  MEMCD0 + MEMWR + UVCYC + MSER1
  IF [VCC] BUFENB1 = /MEMCD1 + /MEMCD0 + /MEMWR + SELCOL + /DMAMA +
  /MEMCD1 + /MEMCD0 + /MEMWR + DATABUFENB + /MEMCD1 +
  /MEMCD0 + MEMWR + UVCYC + MSER1
  IF [VCC] BDIRT = MEMWR + DECODE + MEMWR + SELCOL + MSER1
  IF [VCC] STARTCYC = /DMAMA + UVCYCCD2 + UVCYC + /MEMWR +
  /DMAMA + DECODE + /UVCYCCD2 + UVCYC + /MEMWR + DONE + /DMAMA + UVCYC +
  MEMWR + DMAMA + DECODE + DMAMA + SELCOL
E: KA630-A, -B, -C, -D (M7606) MEMORY SUBSYSTEM BUFFER CONTROL STROBES
  AND MEMORY CYCLE ENABLE STROBE
  
```

NOTE: THESE PALS WERE FIRST USED ON THE KA630 A,B,C,D (M7606).

REVISIONS	
CHG	CHANGE NO. REV

digital	DATE: 8-11-84	DATE: 8-11-84	TITLE: PALASM LISTINGS FOR PAL16L8A DEVICES
	CHK'D: ERW	DATE: 8-11-84	BOARD LOCATION: 1
FIRST USED ON OPTION/MODEL: DSKT 1, 12P (4, 550)		NEXT HIGHER ASSEMBLY: 1	SIZE CODE: D CS
			NUMBER: M7475 -0-64
			REV: A

MRAS<8:180>L local dram array buffered row address strobes
 MSER<1:0>L memory system error register write wrong parity and parity trap enable controls
 MSID<4:0>L expansion memory identification codes
 MSUT<1:0>H expansion memory write control strobes
 ODD WD<H> indicates an odd word address
 OSC031<H> watch/ram (TOY chip) clock input (31us)
 PD<3:2>H local dram array parity data
 LPD<3:0>H local dram array dampened parity data
 PE<3:0>L dram array transceiver (wire-ored) byte parity error strobes
 PERR<L> local dram array byte active and select column controlled parity error strobe
 PF<L> power failure strobe
 QALE<H> Q-bus address latch enable (also indicates "slave idle")
 QBIOCYC<L> RTVAX is addressing Q-bus I/O space (not memory)
 QMEMENB<L> enables Q-bus access to local memory
 QREQ<L> Q-bus request from RTVAX
 QRR<H> HTBT input from Q-bus (latched at assertion of SYNC)
 RAS ALL<H> generates RAS for all memory banks during refresh
 RAS DECODE<L> row address strobe decoder enable
 RAS<8:1:00>L buffered and damped local dram array row address strobes
 RAS<8:0>H nine row address strobes for the nine possible banks of dram
 RBS7<H> BS7 input from Q-bus
 RCV BDAL<H> controls the direction of the DC021 xcur's
 RD<3:1:16>H undampened local dram array data transceiver data lines
 RDCOK<L> indicates DC power at proper level
 RDIN<H> DIN from the Q-bus
 RDNGI<H> DMGI from the Q-bus
 RDMR<H> DMR from the Q-bus
 RDOUT<H> DOUT from the Q-bus
 READY<H> DC379 generated RTVAX ready strobe, armed by EPREADY
 REF REQ<H> indicates a refresh cycle needed
 REF->MA<L> clears a refresh request & enables ref adrs onto MA
 RHALT<H> HALT from the Q-bus
 RIAKI<H> IAKI from the Q-bus
 RINIT<H> INIT from the Q-bus
 RIRQ<7:4>H IRQ's from the Q-bus
 RPOK<L> POK from the Q-bus
 RR<H> sync'd refresh request (to memory arbiter)
 RREF<H> REF from the Q-bus
 RRPLY<H> RPLY from the Q-bus
 RSACK<H> SACK from the Q-bus
 RSYNC<H> SYNC input from Q-bus
 RSYNCL<L> inverted SYNC for latching XDAL's for scatter/gather map
 RUNCL<L> exited halt protected prom and prefetching and dram refreshing status flag
 SDIN<H> sync'd DIN from the Q-bus
 SDMGI<H> sync'd DMGI from the Q-bus
 SDMR<H> sync'd DMR from the Q-bus
 SDOUT<H> sync'd DOUT from the Q-bus
 SEL CB<L> Q-bus doorbell select
 SEL L016MB<L> dynamic low 16 mega-byte address comparator output
 SELCOL<H> RAM timing signal (indicates existing memory)
 SELCOL<L> RAM timing signal (indicates existing memory)
 SG1<L> soft ground (for use by board testers)
 SG4<L> soft ground (for use by board testers)
 SI<H> terminated eia serial in +
 SI<L> terminated eia serial in -
 SRPLY<H> sync'd RPLY input from Q-bus
 SRUNCL<L> goes to "RUN" light on front panel

SSACK<H> sync'd SACK input from Q-bus
 SSYNC<H> sync'd SYNC input from Q-bus
 START CYC<L> select column control for lock or non-existent memory cycles
 SYSCLK<H> unbuffered system clock used to drive RTVAX and FPU
 T.O.<H> sync'd 10 usec. timeout
 TBS7<H> BS7 output to Q-bus
 TDIO<L> TDIN or TDOUT control from Q-bus master state machine
 TDMGOK<H> DMGO output to Q-bus
 TDMR<H> DMR output to Q-bus
 TIAKOK<H> IAKO output to Q-bus
 TINIT<H> INIT output to Q-bus (externally gated by ARB)
 TREF<H> REF output to Q-bus
 TRPLY<H> TRPLY output to Q-bus
 TS<1:0>H "t-state" counter outputs (sync'd to RTVAX ucycle at power up)
 TS<1>L "t-state" grey code counter inverted feedback next state control
 TSACK<H> SACK output to Q-bus
 TSYNC<H> SYNC output to Q-bus
 UVAS<L> RTVAX address strobe
 UVBA<3:0>L byte mask bits from rtvax
 UVBR<14>L bus interrupt request input for processor level 14
 UVCLKOK<H> unbuffered RTVAX clock out
 UVCS<2:0>H RTVAX cycle status strobes (see table on 1.1)
 UVCYC<L> low 16 mega-byte dram cycle started flag (enables select column strobe)
 UVCYCCD<2:0>L RTVAX cycle codes (see table on 1.7)
 UVDAL->MA<L> enables RTVAX latched addresses onto MA bus
 UVDAL<3:1:0>H RTVAX data/address lines
 UVDBE<L> RTVAX data buffer enable strobe
 UVDS<L> RTVAX data strobe
 UVEPS<L> RTVAX external processor strobe
 UVERR<L> RTVAX error (forces abnormal termination of cycle)
 UVHALT<L> RTVAX halt
 UVRDY<L> RTVAX ready control input
 UVRESET<L> RTVAX reset control signal
 UVWR<H> buffered RTVAX write signal
 UVWR<L> RTVAX write signal
 V1.2REF<H> 1.2 volt reference in battery sense circuit
 V4.3REF<H> 4.3 volt regulator in charge pump circuit
 VALIDX<H> valid bit from "scatter-gather" map
 WR MAP<L> write control signal for map
 XDAL<2:1:0>H address/data in/out from Q-bus
 XDBI ROK<H> doorbell interrupt request
 XDMA OPE<H> Q-bus parity error on a Q-bus read cycle
 XLAT AD<23:9>H translated addresses out of scatter/gather map
 XHTBT<H> HTBT input from Q-bus

THIS DRAWING AND SPECIFICATIONS ARE THE PROPERTY OF DIGITAL EQUIPMENT CORPORATION AND SHALL NOT BE REPRODUCED OR COPIED OR USED IN WHOLE OR IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION. COPYRIGHT © 1984 DIGITAL EQUIPMENT CORPORATION.

REVISIONS	
CHK	CHANGE NO. REV

DIGITAL	DR ERW	DATE 8-14-84	ENG ERW	DATE 8-14-84	TITLE: MNEMONIC DICTIONARY
	CHK ERW	DATE 8-14-84	DATE 8-14-84	BOARD LOCATION: 2 OF 2	SIZE CODE D CS
FIRST USED ON OPTION/MODEL:		NEXT HIGHER ASSEMBLY:		NUMBER 17478-0-65	REV. A

GLOBAL SIGNAL CROSS REFERENCE - 12-OCT-1984

A120V -0.08 0.1 +12.0V H			
AD2	1	A	FINGER Pg. 1.11
C34	1	A<0>	CAP Pg. 1.9
C39	1	A<0>	CAP Pg. 1.11
C68	1	A<1>	CAP Pg. 1.11
C59	1	A<0>	CAP Pg. 1.11
E15	6	VOUT	9543 Pg. 1.9
E23	8	V-	9536 Pg. 1.9
F1	1	P1	FUSE Pg. 1.9
R13	2	A	RES Pg. 1.8
A120VL -0.08 0.1 12.0V L			
C32	2	B<0>	CAP Pg. 1.9
C33	2	B<0>	CAP Pg. 1.9
D4	1	B	DIODE Pg. 1.9
E23	1	V-	9536 Pg. 1.9
R7	1	B	RES Pg. 1.9
A3VA -7.32 0.12 +3VA H			
E3	26	F10	5555 Pg. 1.5
E4	26	F10	5555 Pg. 1.5
M31	4	-PR	F74 Pg. 1.1
M31	13	-CL	F74 Pg. 1.1
M34	1	-CL	F74 Pg. 1.1
M34	10	-PR	F74 Pg. 1.1
M36	1	R<0>	F521 Pg. 1.2
R9	6	A<0>	SIP2A Pg. 1.1
R9	10	A<0>	SIP2A Pg. 1.1
A50V 0.0 0.0 +5.0V H			
AA2	1	A	FINGER Pg. 1.1
BA2	1	A	FINGER Pg. 1.1
BA2	1	A	FINGER Pg. 1.1
CA1	1	A<5>	CAP Pg. 1.1
CA2	1	A<4>	CAP Pg. 1.1
CA3	1	A<3>	CAP Pg. 1.1
CA4	1	A<2>	CAP Pg. 1.1
CA5	1	A<1>	CAP Pg. 1.1
CA6	1	A<0>	CAP Pg. 1.1
CA7	1	A<4>	CAP Pg. 1.1
CA8	1	A<3>	CAP Pg. 1.1
CA9	1	A<2>	CAP Pg. 1.1
CA10	1	A<1>	CAP Pg. 1.1
CA11	1	A<0>	CAP Pg. 1.1
CA12	1	A<4>	CAP Pg. 1.1
CA13	1	A<3>	CAP Pg. 1.1
CA14	1	A<2>	CAP Pg. 1.1
CA15	1	A<1>	CAP Pg. 1.1
CA16	1	A<0>	CAP Pg. 1.1
CA17	1	A<4>	CAP Pg. 1.1
CA18	1	A<3>	CAP Pg. 1.1
CA19	1	A<2>	CAP Pg. 1.1
CA20	1	A<1>	CAP Pg. 1.1
CA21	1	A<0>	CAP Pg. 1.1
CA22	1	A<4>	CAP Pg. 1.1
CA23	1	A<3>	CAP Pg. 1.1
CA24	1	A<2>	CAP Pg. 1.1
CA25	1	A<1>	CAP Pg. 1.1
CA26	1	A<0>	CAP Pg. 1.1
CA27	1	A<4>	CAP Pg. 1.1
CA28	1	A<3>	CAP Pg. 1.1
CA29	1	A<2>	CAP Pg. 1.1
CA30	1	A<1>	CAP Pg. 1.1
CA31	1	A<0>	CAP Pg. 1.1
CA32	1	A<4>	CAP Pg. 1.1
CA33	1	A<3>	CAP Pg. 1.1
CA34	1	A<2>	CAP Pg. 1.1
CA35	1	A<1>	CAP Pg. 1.1
CA36	1	A<0>	CAP Pg. 1.1
CA37	1	A<4>	CAP Pg. 1.1
CA38	1	A<3>	CAP Pg. 1.1
CA39	1	A<2>	CAP Pg. 1.1
CA40	1	A<1>	CAP Pg. 1.1
CA41	1	A<0>	CAP Pg. 1.1
CA42	1	A<4>	CAP Pg. 1.1
CA43	1	A<3>	CAP Pg. 1.1
CA44	1	A<2>	CAP Pg. 1.1
CA45	1	A<1>	CAP Pg. 1.1
CA46	1	A<0>	CAP Pg. 1.1
CA47	1	A<4>	CAP Pg. 1.1
CA48	1	A<3>	CAP Pg. 1.1
CA49	1	A<2>	CAP Pg. 1.1
CA50	1	A<1>	CAP Pg. 1.1
CA51	1	A<0>	CAP Pg. 1.1
CA52	1	A<4>	CAP Pg. 1.1

C53	1	A<13>	CAP Pg. 1.11
C54	1	A<12>	CAP Pg. 1.11
C55	1	A<11>	CAP Pg. 1.11
C56	1	A<10>	CAP Pg. 1.11
C57	1	A<9>	CAP Pg. 1.11
C58	1	A<8>	CAP Pg. 1.11
C59	1	A<7>	CAP Pg. 1.11
C60	1	A<6>	CAP Pg. 1.11
C61	1	A<5>	CAP Pg. 1.11
C62	1	A<4>	CAP Pg. 1.11
C63	1	A<3>	CAP Pg. 1.11
C64	1	A<2>	CAP Pg. 1.11
C65	1	A<1>	CAP Pg. 1.11
C66	1	A<0>	CAP Pg. 1.11
C71	1	A<49>	CAP Pg. 1.11
C72	1	A<48>	CAP Pg. 1.11
C73	1	A<47>	CAP Pg. 1.11
C74	1	A<46>	CAP Pg. 1.11
C75	1	A<55>	CAP Pg. 1.11
C76	1	A<54>	CAP Pg. 1.11
C77	1	A<53>	CAP Pg. 1.11
C78	1	A<52>	CAP Pg. 1.11
C79	1	A<51>	CAP Pg. 1.11
C80	1	A<50>	CAP Pg. 1.11
CA2	1	A	FINGER Pg. 1.3
D6	1	A	DIODE Pg. 1.8
D7	2	B	DIODE Pg. 1.8
D9	1	A	DIODE Pg. 1.7
D10	1	P1<0>	LEDPACK Pg. 1.10
D11	1	P1<0>	LEDPACK Pg. 1.10
D12	1	P1<0>	LEDPACK Pg. 1.10
D13	1	P1<0>	LEDPACK Pg. 1.10
D14	1	P1<0>	LEDPACK Pg. 1.10
EA2	1	A	FINGER Pg. 1.3
E29	8	V+	LM211 Pg. 1.8
F2	1	P1	FUSE Pg. 1.10
R3	1	VCC	SIP2A Pg. 2.1.2
R10	1	VCC	SIP2A Pg. 1.4
R16	2	A	RES Pg. 1.7
R23	1	VCC	SIP2A Pg. 1.8
W1	1	A	JUMPER Pg. 1.9
ARB1 -1.780 0.145 ARB(L)			
E16	4	A<0>	8640 Pg. 1.6
E16	6	B<0>	8640 Pg. 1.6
E16	10	B<0>	8640 Pg. 1.6
E16	11	B<0>	8640 Pg. 1.6
E20	19	I11	825167 Pg. 2.2
E24	7	-ENB1	8641 Pg. 1.6
E45	131	-ARB	GATEARRAY2 Pg. 1.4
ARMRDYERRL -0.1 0.025 ARMRDYERR(L)			
E27	11	06	825105 Pg. 2.1
E39	18	I12	825167 Pg. 2.1
ARMREPLYL -0.01 0.01 ARM REPLY(L)			
E33	14	01	825167 Pg. 2.2
E45	137	-TRPLY	GATEARRAY2 Pg. 1.4
ARMUVDALL -1.4 0.1 ARM UVDAL(L)			
E27	16	02	825105 Pg. 2.1
E52	19	-OE	F245 Pg. 1.2
E52	12	A<0>	F32 Pg. 2.1.1
E71	19	-OE	F245 Pg. 1.2
E85	19	-OE	F245 Pg. 1.2
E99	19	-OE	F245 Pg. 1.2
ASYNCTOH -0.6 0.02 ASYNC T.O.(H)			
E8	4	D<3>	F374 Pg. 2.2
E45	132	ASYNC T.O.	GATEARRAY2 Pg. 1.4
AUXHLTH -0.01 0.01 AUX HLT(H)			
E44	84	TX AUX HLT	GATEARRAY1 Pg. 1.7
E45	104	AUX HLT	GATEARRAY2 Pg. 1.4

BBS7L	0.0	0.0	BBS7(L)	
AP2	1	A	FINGER	Pg. 1.6
E19	15	-B4	8541	Pg. 1.6
R26	6	A<1>	TERM	Pg. 1.6
BDALL8	0.0	0.0	BDAL<8>L	
AU2	1	A	FINGER	Pg. 1.6
E11	7	-Y<0>	DC021	Pg. 1.6
R25	2	A<0>	TERM	Pg. 1.6
BDALL1	0.0	0.0	BDAL<1>L	
AV2	1	A	FINGER	Pg. 1.6
E11	6	-Y<1>	DC021	Pg. 1.6
R26	3	A<1>	TERM	Pg. 1.6
BDALL10	0.0	0.0	BDAL<10>L	
BP2	1	A	FINGER	Pg. 1.6
E36	7	-Y<10>	DC021	Pg. 1.6
R24	8	A<2>	TERM	Pg. 1.6
BDALL11	0.0	0.0	BDAL<11>L	
BR2	1	A	FINGER	Pg. 1.6
E36	6	-Y<11>	DC021	Pg. 1.6
R24	7	A<3>	TERM	Pg. 1.6
BDALL12	0.0	0.0	BDAL<12>L	
B52	1	A	FINGER	Pg. 1.6
E36	5	-Y<12>	DC021	Pg. 1.6
R24	6	A<4>	TERM	Pg. 1.6
BDALL13	0.0	0.0	BDAL<13>L	
BT2	1	A	FINGER	Pg. 1.6
E36	4	-Y<13>	DC021	Pg. 1.6
R24	5	A<5>	TERM	Pg. 1.6
BDALL14	0.0	0.0	BDAL<14>L	
BU2	1	A	FINGER	Pg. 1.6
E36	3	-Y<14>	DC021	Pg. 1.6
R24	4	A<6>	TERM	Pg. 1.6
BDALL15	0.0	0.0	BDAL<15>L	
BV2	1	A	FINGER	Pg. 1.6
E36	2	-Y<15>	DC021	Pg. 1.6
R24	3	A<7>	TERM	Pg. 1.6
BDALL16	0.0	0.0	BDAL<16>L	
AC1	1	A	FINGER	Pg. 1.6
E11	3	-Y<16>	DC021	Pg. 1.6
R27	4	A<0>	TERM	Pg. 1.6
BDALL17	0.0	0.0	BDAL<17>L	
AD1	1	A	FINGER	Pg. 1.6
E11	4	-Y<17>	DC021	Pg. 1.6
R27	5	A<1>	TERM	Pg. 1.6
BDALL18	0.0	0.0	BDAL<18>L	
BC1	1	A	FINGER	Pg. 1.6
E11	5	-Y<18>	DC021	Pg. 1.6
R25	3	A<2>	TERM	Pg. 1.6
BDALL19	0.0	0.0	BDAL<19>L	
BD1	1	A	FINGER	Pg. 1.6
E11	8	-Y<19>	DC021	Pg. 1.6
R25	4	A<3>	TERM	Pg. 1.6
BDALL2	0.0	0.0	BDAL<2>L	
BE2	1	A	FINGER	Pg. 1.6
E30	4	-Y<2>	DC021	Pg. 1.6
R25	7	A<2>	TERM	Pg. 1.6
BDALL20	0.0	0.0	BDAL<20>L	
BE1	1	A	FINGER	Pg. 1.6
E30	2	-Y<20>	DC021	Pg. 1.6
R25	5	A<4>	TERM	Pg. 1.6

BDALL21	0.0	0.0	BDAL<21>L	
BF1	1	A	FINGER	Pg. 1.6
E30	3	-Y<21>	DC021	Pg. 1.6
R25	6	A<5>	TERM	Pg. 1.6
BDALL3	0.0	0.0	BDAL<3>L	
BF2	1	A	FINGER	Pg. 1.6
E30	5	-Y<3>	DC021	Pg. 1.6
R25	8	A<3>	TERM	Pg. 1.6
BDALL4	0.0	0.0	BDAL<4>L	
BH2	1	A	FINGER	Pg. 1.6
E30	6	-Y<4>	DC021	Pg. 1.6
R25	9	A<4>	TERM	Pg. 1.6
BDALL5	0.0	0.0	BDAL<5>L	
BJ2	1	A	FINGER	Pg. 1.6
E30	7	-Y<5>	DC021	Pg. 1.6
R25	10	A<5>	TERM	Pg. 1.6
BDALL6	0.0	0.0	BDAL<6>L	
BK2	1	A	FINGER	Pg. 1.6
E30	8	-Y<6>	DC021	Pg. 1.6
R25	11	A<6>	TERM	Pg. 1.6
BDALL7	0.0	0.0	BDAL<7>L	
BL2	1	A	FINGER	Pg. 1.6
E30	9	-Y<7>	DC021	Pg. 1.6
R25	12	A<7>	TERM	Pg. 1.6
BDALL8	0.0	0.0	BDAL<8>L	
BM2	1	A	FINGER	Pg. 1.6
E36	9	-Y<8>	DC021	Pg. 1.6
R24	10	A<8>	TERM	Pg. 1.6
BDALL9	0.0	0.0	BDAL<9>L	
BN2	1	A	FINGER	Pg. 1.6
E36	8	-Y<9>	DC021	Pg. 1.6
R24	9	A<1>	TERM	Pg. 1.6
BDCOKH	-0.8	0.04	BDCOK(H)	
BA1	1	A	FINGER	Pg. 1.6
E24	1	-B1	8641	Pg. 1.6
E35	1	A<0>	LS26	Pg. 1.9
E35	4	A<0>	LS26	Pg. 1.9
R26	12	A<3>	TERM	Pg. 1.6
BDCDL0	-0.030	0.030	BDCD<0>L	
E28	18	Y<2>	LS244	Pg. 1.10
E44	77	-DBG	CD<0>	GATEARRAY1 Pg. 1.7
BDCDL1	-2.030	0.030	BDCD<1>L	
E28	3	Y<0>	LS244	Pg. 1.10
E44	78	-DBG	CD<1>	GATEARRAY1 Pg. 1.7
BDINL	0			

LRD18	-0.02	0.02	LRD<18>H	
E82	2	DIN<3>	255K	Pg. 1.3
E82	14	DOU<3>	255K	Pg. 1.3
R35	1	B<2>	SIP88	Pg. 1.3
LRD19	-0.02	0.02	LRD<19>H	
E75	2	DIN<4>	255K	Pg. 1.3
E75	14	DOU<4>	255K	Pg. 1.3
R42	7	B<3>	SIP88	Pg. 1.3
LRD2	-1.020	0.07	LRD<2>H	
E87	2	DIN<3>	255K	Pg. 1.3
E84	14	DOU<3>	255K	Pg. 1.3
E106	21	B<2>	29853	Pg. 1.3
LRD20	-0.02	0.02	LRD<20>H	
E58	2	DIN<5>	255K	Pg. 1.3
E58	14	DOU<5>	255K	Pg. 1.3
R42	5	B<4>	SIP88	Pg. 1.3
LRD21	-0.02	0.02	LRD<21>H	
E51	2	DIN<6>	255K	Pg. 1.3
E51	14	DOU<6>	255K	Pg. 1.3
R35	1	B<5>	SIP88	Pg. 1.3
LRD22	-0.02	0.02	LRD<22>H	
E55	2	DIN<7>	255K	Pg. 1.3
E55	14	DOU<7>	255K	Pg. 1.3
R37	7	B<5>	SIP88	Pg. 1.3
LRD23	-0.02	0.02	LRD<23>H	
E43	2	DIN<8>	255K	Pg. 1.3
E43	14	DOU<8>	255K	Pg. 1.3
R37	5	B<7>	SIP88	Pg. 1.3
LRD24	-0.02	0.02	LRD<24>H	
E95	2	DIN<1>	255K	Pg. 1.3
E95	14	DOU<1>	255K	Pg. 1.3
R37	1	B<0>	SIP88	Pg. 1.3
LRD25	-0.02	0.02	LRD<25>H	
E88	2	DIN<2>	255K	Pg. 1.3
E88	14	DOU<2>	255K	Pg. 1.3
R36	7	B<1>	SIP88	Pg. 1.3
LRD26	-0.02	0.02	LRD<26>H	
E81	2	DIN<3>	255K	Pg. 1.3
E81	14	DOU<3>	255K	Pg. 1.3
R36	5	B<2>	SIP88	Pg. 1.3
LRD27	-0.02	0.02	LRD<27>H	
E74	2	DIN<4>	255K	Pg. 1.3
E74	14	DOU<4>	255K	Pg. 1.3
R36	3	B<3>	SIP88	Pg. 1.3
LRD28	-0.02	0.02	LRD<28>H	
E57	2	DIN<5>	255K	Pg. 1.3
E57	14	DOU<5>	255K	Pg. 1.3
R36	1	B<4>	SIP88	Pg. 1.3
LRD29	-0.02	0.02	LRD<29>H	
E50	2	DIN<6>	255K	Pg. 1.3
E50	14	DOU<6>	255K	Pg. 1.3
R35	7	B<5>	SIP88	Pg. 1.3
LRD3	-1.020	0.07	LRD<3>H	
E77	2	DIN<4>	255K	Pg. 1.3
E77	14	DOU<4>	255K	Pg. 1.3
E106	20	B<3>	29853	Pg. 1.3
LRD30	-0.02	0.02	LRD<30>H	
E54	2	DIN<7>	255K	Pg. 1.3
E54	14	DOU<7>	255K	Pg. 1.3
R35	5	B<5>	SIP88	Pg. 1.3

LRD31	-0.02	0.02	LRD<31>H	
E49	2	DIN<8>	255K	Pg. 1.3
E48	14	DOU<8>	255K	Pg. 1.3
R35	3	B<7>	SIP88	Pg. 1.3
LRD4	-1.020	0.07	LRD<4>H	
E70	2	DIN<5>	255K	Pg. 1.3
E70	14	DOU<5>	255K	Pg. 1.3
E106	19	B<4>	29853	Pg. 1.3
LRD5	-1.020	0.07	LRD<5>H	
E53	2	DIN<6>	255K	Pg. 1.3
E53	14	DOU<6>	255K	Pg. 1.3
E106	18	B<5>	29853	Pg. 1.3
LRD6	-1.020	0.07	LRD<6>H	
E57	2	DIN<7>	255K	Pg. 1.3
E57	14	DOU<7>	255K	Pg. 1.3
E106	17	B<6>	29853	Pg. 1.3
LRD7	-1.020	0.07	LRD<7>H	
E51	2	DIN<8>	255K	Pg. 1.3
E51	14	DOU<8>	255K	Pg. 1.3
E106	16	B<7>	29853	Pg. 1.3
LRD8	-1.020	0.07	LRD<8>H	
E92	23	B<0>	29853	Pg. 1.3
E97	2	DIN<1>	255K	Pg. 1.3
E97	14	DOU<1>	255K	Pg. 1.3
LRD9	-1.020	0.07	LRD<9>H	
E90	2	DIN<2>	255K	Pg. 1.3
E90	14	DOU<2>	255K	Pg. 1.3
E92	22	B<1>	23353	Pg. 1.3
MA10	-0.49	0.11	MA<10>H	
E6	16	Q<1>	LS373	Pg. 1.5
E21	24	AD<9>	27256	Pg. 1.9
E22	24	AD<9>	27256	Pg. 1.9
E72	14	I<0>	F158	Pg. 1.3
E73	19	Q<0>	F373	Pg. 1.2
MA11	-0.49	0.11	MA<11>H	
E6	15	Q<2>	LS373	Pg. 1.5
E21	21	AD<10>	27256	Pg. 1.9
E22	21	AD<10>	27256	Pg. 1.9
E72	11	I<0>	F158	Pg. 1.3
E73	12	Q<9>	F373	Pg. 1.2
MA12	-0.49	0.11	MA<12>H	
E6	12	Q<3>	LS373	Pg. 1.5
E21	23	AD<11>	27256	Pg. 1.9
E22	23	AD<11>	27256	Pg. 1.9
E72	5	I<0>	F158	Pg. 1.3
E73	6	Q<10>	F373	Pg. 1.2
MA13	-0.49	0.11	MA<13>H	
E6	5	Q<4>	LS373	Pg. 1.5
E21	2	AD<12>	27256	Pg. 1.9
E22	2	AD<12>	27256	Pg. 1.9
E72	2	I<0>	F158	Pg. 1.3
E73	9	Q<11>	F373	Pg. 1.2
MA14	-0.49	0.11	MA<14>H	
E2	9	Q<5>	LS373	Pg. 1.5
E21	26	AD<13>	27256	Pg. 1.9
E22	26	AD<13>	27256	Pg. 1.9
E53	12	Q<12>	F373	Pg. 1.2
E101	11	I<0>	F158	Pg. 1.3
MA15	-0.47	0.09	MA<15>H	
E2	2	Q<6>	LS373	Pg. 1.5
E53	9	Q<13>	F373	Pg. 1.2
E93	14	I<0>	F158	Pg. 1.3
W2	1	A	JUMPER	Pg. 1.9

MA16	-0.470	0.09	MA<16>H	
E6	2	Q<7>	LS373	Pg. 1.5
E46	2	Q<14>	F373	Pg. 1.2
E101	2	I<0>	F158	Pg. 1.3
MA17	-0.470	0.09	MA<17>H	
E2	19	Q<8>	LS373	Pg. 1.5
E46	19	Q<15>	F373	Pg. 1.2
E93	2	I<0>	F158	Pg. 1.3
MA18	-0.48	0.1	MA<18>H	
E2	15	Q<9>	LS373	Pg. 1.5
E45	86	REF<8>	GATEARRAY2	Pg. 1.4
E53	6	Q<16>	F373	Pg. 1.2
E101	6	I<0>	F158	Pg. 1.3
W6	1	A	JUMPER	Pg. 2.1.2
MA19	-0.47	0.09	MA<19>H	
E2	16	Q<10>	LS373	Pg. 1.5
E46	9	Q<17>	F373	Pg. 1.2
E101	5	I<0>	F158	Pg. 1.3
W3	1	A	JUMPER	Pg. 2.1.2
MA2	-0.480	0.100	MA<2>H	
E21	9	AD<1>	27256	Pg. 1.9
E22	9	AD<1>	27256	Pg. 1.9
E45	96	MA<2>	GATEARRAY2	Pg. 1.4
E72	13	I<0>	F158	Pg. 1.3
E73	16	Q<0>	F373	Pg. 1.2
MA20	-0.72	0.13	MA<20>H	
E2	12	Q<11>	LS373	Pg. 1.5
E5	6	Q<18>	F373	Pg. 1.2
E79	2	A5	512X4PROM	Pg. 2.1.2
E93	10	I<0>	F158	Pg. 1.3
MA21	-0.72	0.13	MA<21>H	
E6	6	Q<12>	LS373	Pg. 1.5
E53	5	Q<19>	F373	Pg. 1.2
E79	1	A6	512X4PROM	Pg. 2.1.2
E93	11	I<0>	F158	Pg. 1.3
MA22	-0.32	0.11	MA<22>H	
E2	6	Q<13>	LS373	Pg. 1.5
E46	16	Q<20>	F373	Pg. 1.2
E79	17	A7	512X4PROM	Pg. 2.1.2
MA23	-0.32	0.11	MA<23>H	
E2	5	Q<14>	LS373	Pg. 1.5
E46	5	Q<21>	F373	Pg. 1.2
E79	16	A8	512X4PROM	Pg. 2.1.2
MA3	-0.480	0.100	MA<3>H	
E21	8	AD<2>	27256	Pg. 1.9
E22	8	AD<2>	27256	Pg. 1.9
E45	92	MA<3>	GATEARRAY2	Pg. 1.4
E72	10	I<1>	F158	Pg. 1.3
E73	15	Q<1>	F373	Pg. 1.2
MA4	-0.480	0.100	MA<4>H	
E21	7	AD<3>	27256	Pg. 1.9
E22	7	AD<3>	27256	Pg. 1.9
E45	94	MA<4>	GATEARRAY2	Pg. 1.4
E46	15	Q<2>	F373	Pg. 1.2
E72	6	I<2>	F158	Pg. 1.3
MA5	-0.480	0.100	MA<5>H	
E21	6	AD<4>	27256	Pg. 1.9
E22	6	AD<4>	27256	Pg. 1.9
E45	89	MA<5>	GATEARRAY2	Pg. 1.4
E72	3	I<3>	F158	Pg. 1.3
E73	5	Q<3>	F373	Pg. 1.2

MA6	-0.432	0.102	MA<6>H	
E21	5	AD<5>	27256	Pg. 1.9
E22	5	AD<5>	27256	Pg. 1.9
E45	82	MA<6>	GATEARRAY2	Pg. 1.4
E46	12	Q<4>	F373	Pg. 1.2
E101	10	I<4>	F158	Pg. 1.3
MA7	-0.480	0.100	MA<7>H	
E21	4	AD<6>	27256	Pg. 1.9
E22	4	AD<6>	27256	Pg. 1.9
E45	87	MA<7>	GATEARRAY2	Pg. 1.4
E53	16	Q<5>	F373	Pg. 1.2
E93	13	I<5>	F158	Pg. 1.3
MA8	-0.432	0.102	MA<8>H	
E21	3	AD<7>	27256	Pg. 1.9
E22	3	AD<7>	27256	Pg. 1.9
E45	84	MA<8>	GATEARRAY2	Pg. 1.4
E53	15	Q<6>	F373	Pg. 1.2
E101	3	I<6>	F158	Pg. 1.3
MA9	-0.5	0.120	MA<9>H	
E6	19	Q<0>	LS373	Pg. 1.5
E21	25	AD<8>	27256	Pg. 1.9
E22	25	AD<8>	27256	Pg. 1.9
E45	85	REF<7>	GATEARRAY2	Pg. 1.4
E53	19	Q<7>	F373	Pg. 1.2
E93	3	I<7>	F158	Pg. 1.3
MAA10	-1.0	0.02	MAA<0>L	
CR2	1	A	FINGER	Pg. 1.3
E72	12	-Y<0>	F158	Pg. 1.3
E80	15	A<0>	F240	Pg. 1.3
MAA11	-1.0	0.02	MAA<1>L	
CR2	1	A	FINGER	Pg. 1.3
E72	9	-Y<1>	F158	Pg. 1.3
E80	13	A<1>	F240	Pg. 1.3
MAA12	-1.0	0.02	MAA<2>L	
CP2	1	A	FINGER	Pg. 1.3
E72	7	-Y<2>	F158	Pg. 1.3

MD6 -1.410 0.1 MD<6>H
 42 MD<6> GATEARRAY2 Pg. 1.4
 14 B<6> F245 Pg. 1.2
 17 A<6> 29853 Pg. 1.3
 10 P10 CONN50 Pg. 1.3

MD7 -1.410 0.1 MD<7>H
 59 MD<7> GATEARRAY2 Pg. 1.4
 15 B<7> F245 Pg. 1.2
 9 A<7> 29853 Pg. 1.3
 9 PS CONN50 Pg. 1.3

MD8 -1.410 0.1 MD<8>H
 38 MD<8> GATEARRAY2 Pg. 1.4
 11 B<8> F245 Pg. 1.2
 2 A<8> 29853 Pg. 1.3
 12 P12 CONN50 Pg. 1.3

MD9 -1.410 0.1 MD<9>H
 60 MD<9> GATEARRAY2 Pg. 1.4
 12 B<9> F245 Pg. 1.2
 3 A<9> 29853 Pg. 1.3
 11 P11 CONN50 Pg. 1.3

MEMCD0 -1.11 0.095 MEM CD<0>H
 103 MEM CD<0> GATEARRAY1 Pg. 1.7
 12 C2 512X4PROM Pg. 2.1.2
 9 18 16L8A Pg. 2.1.2
 16 A2 F537 Pg. 2.1.2

MEMCD1 -1.11 0.095 MEM CD<1>H
 124 MEM CD<1> GATEARRAY1 Pg. 1.7
 11 O3 512X4PROM Pg. 2.1.2
 11 19 16L8A Pg. 2.1.2
 17 A3 F537 Pg. 2.1.2

MEMWR -0.6 0.075 MEMWR(L)
 27 18 825105 Pg. 2.1
 79 -MEM WR GATEARRAY2 Pg. 1.4
 6 15 16L8A Pg. 2.1.2
 6 15 16L8A Pg. 2.1.2

MRASL80 -0.05 0.05 MRAS<80>L
 E94 7 -Y<0> F240 Pg. 1.3
 R34 3 B<0> SIP6B Pg. 1.3

MRASL81 -0.05 0.05 MRAS<81>L
 E94 3 -Y<0> F240 Pg. 1.3
 R34 1 B<0> SIP6B Pg. 1.3

MSERL0 -0.25 0.025 MSER<0>L
 E44 105 -MSER<0> GATEARRAY1 Pg. 1.7
 E78 5 14 16L9A Pg. 2.1.2

MSERL1 -0.25 0.025 MSER<1>L
 E44 105 -MSER<1> GATEARRAY1 Pg. 1.7
 E86 4 13 16L8A Pg. 2.1.2

MSIDL0 -0.25 0.04 MSID<0>L
 CJ2 1 A FINGER Pg. 1.3
 E79 5 A0 512X4PROM Pg. 2.1.2
 R23 9 A<0> SIP2A Pg. 2.1.2

MSIDL1 -0.25 0.04 MSID<1>L
 CM2 1 A FINGER Pg. 1.3
 E79 6 A1 512X4PROM Pg. 2.1.2
 R23 8 A<1> SIP2A Pg. 2.1.2

MSIDL2 -0.25 0.04 MSID<2>L
 DJ2 1 A FINGER Pg. 1.3
 E79 7 A2 512X4PROM Pg. 2.1.2
 R23 7 A<2> SIP2A Pg. 2.1.2

MSIDL3 -0.25 0.04 MSID<3>L
 DM2 1 A FINGER Pg. 1.3
 E79 4 A3 512X4PROM Pg. 2.1.2
 R23 6 A<3> SIP2A Pg. 2.1.2

MSIDL4 -0.25 0.04 MSID<4>L
 CT2 1 A FINGER Pg. 1.3
 E79 3 A4 512X4PROM Pg. 2.1.2
 R23 5 A<4> SIP2A Pg. 2.1.2

MSWT0 -1.0 0.02 MSWT<0>H
 E86 12 00 16L8A Pg. 2.1.2
 E94 15 A<0> F240 Pg. 1.3

MSWT1 0.0 0.0 MSWT<1>H
 CK2 1 A FINGER Pg. 1.3
 E86 13 01 16L8A Pg. 2.1.2

NC 0.0 0.0 NC H
 E11 2 -Y<23> DC021 Pg. 1.6
 E11 18 A<23> DC021 Pg. 1.6
 E33 10 04 825167 Pg. 2.2
 E20 8 10 825167 Pg. 2.2
 E20 7 11 825167 Pg. 2.2
 E20 6 12 825167 Pg. 2.2
 E17 10 Q<2> F174 Pg. 2.1.1
 E17 11 D<2> F174 Pg. 2.1.1
 E34 6 -Q<0> F74 Pg. 2.1.1
 E31 5 Q<0> F74 Pg. 2.1.1
 E34 8 -Q<0> F74 Pg. 2.1.1
 E43 22 -DMG DC333 Pg. 1.1
 E43 9 V88 DC333 Pg. 1.1
 E14 23 SOW MC146818 Pg. 1.8
 E14 21 CKOUT MC146818 Pg. 1.8
 E14 19 -IRO MC146818 Pg. 1.8
 E14 3 OSC2 MC146818 Pg. 1.8
 E13 34 BRCLK DC319 Pg. 1.9
 E13 25 CLK020 DC319 Pg. 1.9
 E13 36 CLK60 DC319 Pg. 1.9
 E13 35 CLK50 DC319 Pg. 1.9
 J3 6 P6 10PINCONN Pg. 1.9
 E101 12 -Y<0> F158 Pg. 1.3
 E93 7 -Y<1> F158 Pg. 1.3
 E94 12 -Y<0> F240 Pg. 1.3
 E94 16 -Y<1> F240 Pg. 1.3
 E80 3 -Y<2> F240 Pg. 1.3
 E80 14 -Y<3> F240 Pg. 1.3
 E5 3 R1 8641 Pg. 1.6
 E19 3 R1 8641 Pg. 1.6

ODDWDH -0.1 0.025 ODD WD<H>
 E33 20 110 825167 Pg. 2.2
 E45 118 ODD WD GATEARRAY2 Pg. 1.4

OSC031H -0.01 0.01 OSC031<H>
 E14 2 OSC1 MC146818 Pg. 1.8
 R3 1 0 RES Pg. 1.8

PD2 -1.0 0.05 PD<2>H
 E64 15 PAR 29853 Pg. 1.3
 R39 4 A<0> SIP8B Pg. 1.3

PD3 -1.0 0.05 PD<3>H
 E58 15 PAR 29853 Pg. 1.3
 R37 4 A<0> SIP8B Pg. 1.3

PEL0 -0.25 0.025 PE<0>L
 E78 4 13 16L8A Pg. 2.1.2
 E106 10 -ERR 29853 Pg. 1.3
 J1 19 P19 CONN50 Pg. 1.3
 R9 5 A<0> SIP2A Pg. 2.1.2

PEL1 -0.25 0.025 PE<1>L
 E78 3 12 16L8A Pg. 2.1.2
 E92 10 -ERR 29853 Pg. 1.3
 J1 24 P24 CONN50 Pg. 1.3
 R9 4 A<1> SIP2A Pg. 2.1.2

PEL2 -0.25 0.025 PE<2>L
 E64 10 -ERR 29853 Pg. 1.3
 E78 2 11 16L8A Pg. 2.1.2
 J1 32 P32 CONN50 Pg. 1.3
 R9 3 A<2> SIP2A Pg. 2.1.2

PEL3 -0.25 0.025 PE<3>L
 E58 10 -ERR 29853 Pg. 1.3
 E78 1 10 16L8A Pg. 2.1.2
 J1 27 P27 CONN50 Pg. 1.3
 R9 2 A<3> SIP2A Pg. 2.1.2

PERRL -0.6 0.02 PERR(L)
 E65 13 B<0> F32 Pg. 2.1.1
 E78 14 02 16L8A Pg. 2.1.2

PFL -0.01 0.01 PF(L)
 E25 6 -Y<0> LS04 Pg. 1.1
 E43 8 -PWRF L DC333 Pg. 1.1

QALEH -1.160 0.1 QALE<H>
 E2 11 E LS373 Pg. 1.5
 E6 11 E LS373 Pg. 1.5
 E26 8 10 825167 Pg. 2.2
 E33 11 03 825167 Pg. 2.2
 E48 8 17 16L8A Pg. 1.4
 E45 124 QALE GATEARRAY2 Pg. 1.4

QBIOCYCL -0.11 0.035 QBIOCYC(L)
 E26 7 11 825167 Pg. 2.2
 E44 34 -QBIOCYC GATEARRAY1 Pg. 1.7
 E45 134 -QBIOCYC GATEARRAY2 Pg. 1.4

QMEMENB -0.1 0.025 QMEMENB(L)
 E33 23 17 825167 Pg. 2.2
 E45 93 -QMEM ENB GATEARRAY2 Pg. 1.4

QRQL -0.11 0.035 QRQ(L)
 E20 18 112 825167 Pg. 2.2
 E27 13 04 825105 Pg. 2.1
 E45 97 -QRQ GATEARRAY2 Pg. 1.4

QWRH -0.1 0.025 QWR(H)
 E33 22 13 825167 Pg. 2.2
 E45 99 QWR GATEARRAY2 Pg. 1.4

R1E37PDL -0.6 0.02 R1E37PD(L)
 E37 5 B<0> F32 Pg. 1.1
 R1 1 B RES Pg. 1.1

R23E47PUH -0.6 0.02 R23E47PU<H>
 E47 5 B<0> F00 Pg. 1.1
 R23 10 A<0> SIP2A Pg. 1.1

R9E15PUH -1.0 0.08 R9E15PU<H>
 E15 2 A<0> 9643 Pg. 1.9
 R9 9 A<0> SIP2A Pg. 1.9

R9E47PUH -0.6 0.02 R9E47PU<H>
 E47 1 A<0> F00 Pg. 1.9
 R9 7 A<0> SIP2A Pg. 1.9

RAS0 -0.05 0.05 RAS<0>H
 CU2 1 A FINGER Pg. 1.3
 E100 3 00 F537 Pg. 2.1.2

RAS1 -0.05 0.05 RAS<1>H
 CF2 1 A FINGER Pg. 1.3
 E100 2 01 F537 Pg. 2.1.2

RAS2 -0.05 0.05 RAS<2>H
 DN2 1 A FINGER Pg. 1.3
 E100 1 02 F537 Pg. 2.1.2

RAS3 -0.05 0.05 RAS<3>H
 DK2 1 A FINGER Pg. 1.3
 E100 19 03 F537 Pg. 2.1.2

RAS4 -0.05 0.05 RAS<4>H
 CL2 1 A FINGER Pg. 1.3
 E100 18 04 F537 Pg. 2.1.2

RAS5 -0.05 0.05 RAS<5>H
 CD2 1 A FINGER Pg. 1.3
 E100 8 05 F537 Pg. 2.1.2

RAS6 -0.05 0.05 RAS<6>H
 DU2 1 A FINGER Pg. 1.3
 E100 9 06 F537 Pg. 2.1.2

RAS7 -0.05 0.05 RAS<7>H
 DL2 1 A FINGER Pg. 1.3
 E100 11 07 F537 Pg. 2.1.2

RAS8 -2.05 0.09 RAS<8>H
 E94 13 A<0> F240 Pg. 1.3
 E94 17 A<0> F240 Pg. 1.3
 E100 12 08 F537 Pg. 2.1.2

RASALLH -0.0 0.02 RAS ALL<H>
 E59 15 A<0> F174 Pg. 2.1.1
 E100 4 P F537 Pg. 2.1.2

RASDECODEL -1.2 0.04 RAS DECODE<L>
 E31 6 -Q<0> F74 Pg. 2.1.1
 E37 2 B<0> F32 Pg. 2.1.1
 E100 15 -E1 F537 Pg. 2.1.2

RASL80 -0.18 0.18 RAS<80>L
 E50 4 -RAS 256K Pg. 1.3
 E51 4 -RAS 256K Pg. 1.3
 E55 4 -RAS 256K Pg. 1.3
 E57 4 -RAS 256K Pg. 1.3
 E62 4 -RAS 256K Pg. 1.3
 E63 4 -RAS 256K Pg. 1.3
 E69 4 -RAS 256K Pg. 1.3
 E70 4 -RAS 256K Pg. 1.3
 E75 4 -RAS 256K Pg. 1.3
 E77 4 -RAS 256K Pg. 1.3
 E83 4 -RAS 256K Pg. 1.3
 E84 4 -RAS 256K Pg. 1.3
 E90 4 -RAS 256K Pg. 1.3
 E91 4 -RAS 256K Pg. 1.3
 E97 4 -RAS 256K Pg. 1.3
 E98 4 -RAS 256K Pg. 1.3
 E104 4 -RAS 256K Pg. 1.3
 E105 4 -RAS 256K Pg. 1.3
 R34 4 A<0> SIP6B Pg. 1.3

RASL81 -0.18 0.18 RAS<81>L
 E48 4 -RAS 256K Pg. 1.3
 E49 4 -RAS 256K Pg. 1.3
 E54 4 -RAS 256K Pg. 1.3
 E55 4 -RAS 256K Pg. 1.3
 E60 4 -RAS 256K Pg. 1.3
 E61 4 -RAS 256K Pg. 1.3
 E67 4 -RAS 256K Pg. 1.3
 E68 4 -RAS 256K Pg. 1.3
 E74 4 -RAS 256K Pg. 1.3
 E75 4 -RAS 256K Pg. 1.3
 E81 4 -RAS 256K Pg. 1.3
 E82 4 -RAS 256K Pg. 1.3
 E88 4 -RAS 256K Pg. 1.3
 E89 4 -RAS 256K Pg. 1.3
 E95 4 -RAS 256K Pg. 1.3
 E96 4 -RAS 256K Pg. 1.3
 E102 4 -RAS 256K Pg. 1.3
 E103 4 -RAS 256K Pg. 1.3
 R34 2 A<0> SIP6B Pg. 1.3

RBS7H -0.11 0.035 RBS7<H>
 E19 13 R4 8641 Pg. 1.6
 E33 4 14 825167 Pg. 2.2
 E45 133 RBS7 GATEARRAY2 Pg. 1.4

REVISIONS
 1. ORIGINAL DESIGN
 2. CHANGE NO. 1
 3. CHANGE NO. 2
 4. CHANGE NO. 3
 5. CHANGE NO. 4
 6. CHANGE NO. 5
 7. CHANGE NO. 6
 8. CHANGE NO. 7
 9. CHANGE NO. 8
 10. CHANGE NO. 9
 11. CHANGE NO. 10

digital ORN ERW DATE: 8-19-80
 CHK: ERW DATE: 8-19-80
 DSK: NAMSTR. (2PL4.558)
 FIRST USED ON OPTION/MODEL: 13-DD-M7478-0-0
 DATE: 8-19-80
 BOARD LOCATION: 24
 NEXT HIGHER ASSEMBLY: 13-DD-M7478-0-0
 SIZE CODE: D 100 M7478-0-0
 NUMBER: 2
 REV. 2
 TITLE: KAS20 CROSS REFERENCE SIGNALS

MAA9 0.0 0.0 MAA<9>L
 E32 1 A FINGER Pg. 1.3
 E33 9 -Y<9> F158 Pg. 1.3

MAPAD10 -0.030 0.030 MAP AD<10>H
 E3 9 AD<1> 5565 Pg. 1.5
 E4 9 AD<1> 5565 Pg. 1.5
 E45 141 MAP AD<10> GATEARRAY2 Pg. 1.4

MAPAD11 -0.030 0.030 MAP AD<11>H
 E3 8 AD<2> 5565 Pg. 1.5
 E4 8 AD<2> 5565 Pg. 1.5
 E45 6 MAP AD<11> GATEARRAY2 Pg. 1.4

MAPAD12 -0.030 0.030 MAP AD<12>H
 E3 7 AD<3> 5565 Pg. 1.5
 E4 7 AD<3> 5565 Pg. 1.5
 E45 2 MAP AD<12> GATEARRAY2 Pg. 1.4

MAPAD13 -0.030 0.030 MAP AD<13>H
 E3 6 AD<4> 5565 Pg. 1.5
 E4 5 AD<4> 5565 Pg. 1.5
 E45 142 MAP AD<13> GATEARRAY2 Pg. 1.4

MAPAD14 -0.04 0.04 MAP AD<14>H
 E3 19 Q<0> LS373 Pg. 1.5
 E3 5 AD<5> 5565 Pg. 1.5
 E4 5 AD<5> 5565 Pg. 1.5

MAPAD15 -0.04 0.04 MAP AD<15>H
 E3 16 Q<1> LS373 Pg. 1.5
 E3 4 AD<6> 5565 Pg. 1.5
 E4 4 AD<6> 5565 Pg. 1.5

MAPAD16 -0.04 0.04 MAP AD<16>H
 E3 5 Q<2> LS373 Pg. 1.5
 E3 3 AD<7> 5565 Pg. 1.5
 E4 3 AD<7> 5565 Pg. 1.5

MAPAD17 -0.04 0.04 MAP AD<17>H
 E3 12 Q<3> LS373 Pg. 1.5
 E3 23 AD<8> 5565 Pg. 1.5
 E4 25 AD<8> 5565 Pg. 1.5

MAPAD18 -0.04 0.04 MAP AD<18>H
 E3 15 Q<4> LS373 Pg. 1.5
 E3 24 AD<9> 5565 Pg. 1.5
 E4 24 AD<9> 5565 Pg. 1.5

MAPAD19 -0.04 0.04 MAP AD<19>H
 E3 6 Q<5> LS373 Pg. 1.5
 E3 21 AD<10> 5565 Pg. 1.5
 E4 21 AD<10> 5565 Pg. 1.5

MAPAD20 -0.04 0.04 MAP AD<20>H
 E3 9 Q<6> LS373 Pg. 1.5
 E3 23 AD<11> 5565 Pg. 1.5
 E4 23 AD<11> 5565 Pg. 1.5

MAPAD21 -0.04 0.04 MAP AD<21>H
 E3 2 Q<7> LS373 Pg. 1.5
 E3 2 AD<12> 5565 Pg. 1.5
 E4 2 AD<12> 5565 Pg. 1.5

MAPAD9 -0.030 0.030 MAP AD<9>H
 E3 10 AD<0> 5565 Pg. 1.5
 E4 10 AD<0> 5565 Pg. 1.5
 E45 139 MAP AD<9> GATEARRAY2 Pg. 1.4

MAPDISABLEH -0.02 0.02 MAP DISABLE<H>
 E3 22 -OE 5565 Pg. 1.5
 E4 22 -OE 5565 Pg. 1.5
 E39 9 05 825157 Pg. 2.1

MBMAA0 -0.05 0.05 MBMAA<0>H
 E80 5 -Y<0> F240 Pg. 1.3
 R33 5 B<0> SIP68 Pg. 1.3

MBMAA1 -0.05 0.05 MBMAA<1>H
 E80 7 -Y<1> F240 Pg. 1.3
 R33 3 B<1> SIP68 Pg. 1.3

MBMAA2 -0.05 0.05 MBMAA<2>H
 E80 9 -Y<2> F240 Pg. 1.3
 R33 1 B<2> SIP68 Pg. 1.3

MBMAA3 -0.05 0.05 MBMAA<3>H
 E80 18 -Y<3> F240 Pg. 1.3
 R32 5 B<3> SIP68 Pg. 1.3

MBMAA4 -0.05 0.05 MBMAA<4>H
 E94 14 -Y<4> F240 Pg. 1.3
 R32 3 B<4> SIP68 Pg. 1.3

MBMAA5 -0.05 0.05 MBMAA<5>H
 E80 12 -Y<5> F240 Pg. 1.3
 R32 1 B<5> SIP68 Pg. 1.3

MBMAA6 -0.05 0.05 MBMAA<6>H
 E94 18 -Y<6> F240 Pg. 1.3
 R31 5 B<6> SIP68 Pg. 1.3

MBMAA7 -0.05 0.05 MBMAA<7>H
 E80 16 -Y<7> F240 Pg. 1.3
 R31 3 B<7> SIP68 Pg. 1.3

MBMAA8 -0.05 0.05 MBMAA<8>H
 E94 9 -Y<8> F240 Pg. 1.3
 R31 1 B<8> SIP68 Pg. 1.3

MBMSWTL0 -0.05 0.05 MBMSWTL<0>L
 E94 5 -Y<0> F240 Pg. 1.3
 R34 5 B<0> SIP68 Pg. 1.3

MCASL0 0.0 0.0 MCASL<0>L
 E87 8 -Y<0> F04 Pg. 1.3
 R40 3 B<0> SIP88 Pg. 1.3

MCASL1 0.0 0.0 MCASL<1>L
 E87 6 -Y<0> F04 Pg. 1.3
 R40 1 B<0> SIP88 Pg. 1.3

MCASL2 0.0 0.0 MCASL<2>L
 E87 4 -Y<0> F04 Pg. 1.3
 R39 7 B<0> SIP88 Pg. 1.3

MCASL3 0.0 0.0 MCASL<3>L
 E87 2 -Y<0> F04 Pg. 1.3
 R39 5 B<0> SIP88 Pg. 1.3

MD0 -1.410 0.1 MD<0>H
 E45 39 MD<0> GATEARRAY2 Pg. 1.4
 E99 11 B<0> F245 Pg. 1.2
 E106 2 A<0> 29853 Pg. 1.3
 J1 2 P2 CONN50 Pg. 1.3

MD1 -1.410 0.1 MD<1>H
 E45 56 MD<1> GATEARRAY2 Pg. 1.4
 E99 12 B<1> F245 Pg. 1.2
 E106 3 A<1> 29853 Pg. 1.3
 J1 3 P3 CONN50 Pg. 1.3

MD10 -1.410 0.1 MD<10>H
 E45 34 MD<10> GATEARRAY2 Pg. 1.4
 E85 16 B<10> F245 Pg. 1.2
 E92 4 A<2> 29853 Pg. 1.3
 J1 14 P14 CONN50 Pg. 1.3

MD11 -1.410 0.1 MD<11>H
 E45 61 MD<11> GATEARRAY2 Pg. 1.4
 E85 17 B<11> F245 Pg. 1.2
 E92 5 A<3> 29853 Pg. 1.3
 J1 15 P15 CONN50 Pg. 1.3

MD12 -1.410 0.1 MD<12>H
 E45 44 MD<12> GATEARRAY2 Pg. 1.4
 E85 18 B<12> F245 Pg. 1.2
 E92 6 A<4> 29853 Pg. 1.3
 J1 16 P16 CONN50 Pg. 1.3

MD13 -1.410 0.1 MD<13>H
 E45 62 MD<13> GATEARRAY2 Pg. 1.4
 E95 13 B<13> F245 Pg. 1.2
 E92 7 A<5> 29853 Pg. 1.3
 J1 17 P17 CONN50 Pg. 1.3

MD14 -1.410 0.1 MD<14>H
 E45 40 MD<14> GATEARRAY2 Pg. 1.4
 E95 14 B<14> F245 Pg. 1.2
 E92 8 A<6> 29853 Pg. 1.3
 J1 18 P18 CONN50 Pg. 1.3

MD15 -1.410 0.1 MD<15>H
 E45 63 MD<15> GATEARRAY2 Pg. 1.4
 E71 12 B<15> F245 Pg. 1.2
 E92 9 A<7> 29853 Pg. 1.3
 J1 29 P29 CONN50 Pg. 1.3

MD16 -1.410 0.1 MD<16>H
 E45 47 MD<16> GATEARRAY2 Pg. 1.4
 E52 14 B<16> F245 Pg. 1.2
 E54 2 A<0> 29853 Pg. 1.3
 J1 22 P22 CONN50 Pg. 1.3

MD17 -1.410 0.1 MD<17>H
 E45 65 MD<17> GATEARRAY2 Pg. 1.4
 E52 17 B<17> F245 Pg. 1.2
 E64 3 A<1> 29853 Pg. 1.3
 J1 33 P33 CONN50 Pg. 1.3

MD18 -1.410 0.1 MD<18>H
 E45 43 MD<18> GATEARRAY2 Pg. 1.4
 E64 4 A<2> 29853 Pg. 1.2
 E71 13 B<18> F245 Pg. 1.3
 J1 34 P34 CONN50 Pg. 1.3

MD19 -1.410 0.1 MD<19>H
 E45 69 MD<19> GATEARRAY2 Pg. 1.4
 E52 16 B<19> F245 Pg. 1.2
 E54 5 A<3> 29853 Pg. 1.3
 J1 35 P35 CONN50 Pg. 1.3

MD2 -1.410 0.1 MD<2>H
 E45 35 MD<2> GATEARRAY2 Pg. 1.4
 E99 16 B<2> F245 Pg. 1.2
 E106 4 A<2> 29853 Pg. 1.3
 J1 4 P4 CONN50 Pg. 1.3

MD20 -1.410 0.1 MD<20>H
 E45 41 MD<20> GATEARRAY2 Pg. 1.4
 E52 18 B<20> F245 Pg. 1.2
 E54 6 A<4> 29853 Pg. 1.3
 J1 36 P36 CONN50 Pg. 1.3

MD21 -1.410 0.1 MD<21>H
 E45 64 MD<21> GATEARRAY2 Pg. 1.4
 E64 7 A<5> 29853 Pg. 1.2
 E85 15 B<21> F245 Pg. 1.3
 J1 37 P37 CONN50 Pg. 1.3

MD22 -1.410 0.1 MD<22>H
 E45 52 MD<22> GATEARRAY2 Pg. 1.4
 E52 12 B<22> F245 Pg. 1.2
 E64 8 A<5> 29853 Pg. 1.3
 J1 40 P40 CONN50 Pg. 1.3

MD23 -1.410 0.1 MD<23>H
 E45 67 MD<23> GATEARRAY2 Pg. 1.4
 E52 13 B<23> F245 Pg. 1.2
 E64 9 A<7> 29853 Pg. 1.3
 J1 39 P39 CONN50 Pg. 1.3

MD24 -1.410 0.1 MD<24>H
 E45 46 MD<24> GATEARRAY2 Pg. 1.4
 E58 2 A<0> 29853 Pg. 1.2
 E71 15 B<24> F245 Pg. 1.3
 J1 42 P42 CONN50 Pg. 1.3

MD25 -1.410 0.1 MD<25>H
 E45 68 MD<25> GATEARRAY2 Pg. 1.4
 E58 3 A<1> 29853 Pg. 1.2
 E71 17 B<25> F245 Pg. 1.2
 J1 41 P41 CONN50 Pg. 1.3

MD26 -1.410 0.1 MD<26>H
 E45 51 MD<26> GATEARRAY2 Pg. 1.4
 E58 4 A<2> 29853 Pg. 1.2
 E71 18 B<26> F245 Pg. 1.2
 J1 44 P44 CONN50 Pg. 1.3

MD27 -1.410 0.1 MD<27>H
 E45 71 MD<27> GATEARRAY2 Pg. 1.4
 E58 5 A<3> 29853 Pg. 1.2
 E71 11 B<27> F245 Pg. 1.3
 J1 43 P43 CONN50 Pg. 1.3

MD28 -1.410 0.1 MD<28>H
 E45 48 MD<28> GATEARRAY2 Pg. 1.4
 E58 6 A<4> 29853 Pg. 1.2
 E71 15 B<28> F245 Pg. 1.3
 J1 46 P46 CONN50 Pg. 1.3

MD29 -1.410 0.1 MD<29>H
 E45 53 MD<29> GATEARRAY2 Pg. 1.4
 E58 7 A<5> 29853 Pg. 1.2
 E71 14 B<29> F245 Pg. 1.2
 J1 47 P47 CONN50 Pg. 1.3

MD3 -1.410 0.1 MD<3>H
 E45 58 MD<3> GATEARRAY2 Pg. 1.4
 E99 17 B<3> F245 Pg. 1.2
 E106 5 A<3> 29853 Pg. 1.3
 J1 5 P5 CONN50 Pg. 1.3

MD30 -1.410 0.1 MD<30>H
 E45 49 MD<30> GATEARRAY2 Pg. 1.4
 E52 15 B<30> F245 Pg. 1.2
 E58 8 A<6> 29853 Pg. 1.3
 J1 48 P48 CONN50 Pg. 1.3

MD31 -1.410 0.1 MD<31>H
 E45 52 MD<31> GATEARRAY2 Pg. 1.4
 E52 11 B<31> F245 Pg. 1.2
 E58 9 A<7> 29853 Pg. 1.3
 J1 49 P49 CONN50 Pg. 1.3

MD4 -1.410 0.1 MD<4>H
 E45 31 MD<4> GATEARRAY2 Pg. 1.4
 E99 18 B<4> F245 Pg. 1.2
 E106 6 A<4> 29853 Pg. 1.3
 J1 8 P8 CONN50 Pg. 1.3

MD5 -1.410 0.1 MD<5>H
 E45 57 MD<5> GATEARRAY2 Pg. 1.4
 E99 13 B<5> F245 Pg. 1.2
 E106 7 A<5> 29853 Pg. 1.3
 J1 7 P7 CONN50 Pg. 1.3

REVISIONS
 CHECK CHANGE NO. REV.
 1 1 1 1

DATE: 8-11-84
 DATE: 8-11-84
 TITLE: KAS20 CROSS REFERENCE SIGNALS
 BOARD LOCATION: B-00-M7478-0-2
 SIZE: 100
 NUMBER: 100 M7478-0-2
 REV: A

UVDAL28 -0.532 0.09 UVDAL<28>H Pg. 1.1
 E42 40 DAL<28> DC337 Pg. 1.1
 E43 36 DAL<28> DC333 Pg. 1.1
 E44 141 UVDAL<28> GATEARRAY1 Pg. 1.7
 E55 12 B<4> F521 Pg. 1.2
 E71 4 A<28> F245 Pg. 1.2

UVDAL29 -0.530 0.09 UVDAL<29>H Pg. 1.1
 E42 41 DAL<29> DC337 Pg. 1.1
 E43 35 DAL<29> DC333 Pg. 1.1
 E44 142 UVDAL<29> GATEARRAY1 Pg. 1.7
 E66 14 B<5> F521 Pg. 1.2
 E71 6 A<29> F245 Pg. 1.2

UVDAL3 -1.03 0.09 UVDAL<3>H Pg. 1.1
 E42 63 DAL<3> DC337 Pg. 1.1
 E43 65 DAL<3> DC333 Pg. 1.1
 E44 112 UVDAL<3> GATEARRAY1 Pg. 1.7
 E73 14 D<1> F373 Pg. 1.2
 E99 3 A<3> F245 Pg. 1.2

UVDAL30 0.0 0.0 UVDAL<30>H Pg. 1.1
 E42 42 DAL<30> DC337 Pg. 1.1
 E43 34 DAL<30> DC333 Pg. 1.1
 E44 143 UVDAL<30> GATEARRAY1 Pg. 1.7
 E52 5 A<30> F245 Pg. 1.2

UVDAL31 0.0 0.0 UVDAL<31>H Pg. 1.1
 E42 43 DAL<31> DC337 Pg. 1.1
 E43 33 DAL<31> DC333 Pg. 1.1
 E44 2 UVDAL<31> GATEARRAY1 Pg. 1.7
 E52 9 A<31> F245 Pg. 1.2

UVDAL4 -1.03 0.09 UVDAL<4>H Pg. 1.1
 E42 64 DAL<4> DC337 Pg. 1.1
 E43 64 DAL<4> DC333 Pg. 1.1
 E44 113 UVDAL<4> GATEARRAY1 Pg. 1.7
 E46 14 D<2> F373 Pg. 1.2
 E99 2 A<4> F245 Pg. 1.2

UVDAL5 -1.03 0.09 UVDAL<5>H Pg. 1.1
 E42 65 DAL<5> DC337 Pg. 1.1
 E43 63 DAL<5> DC333 Pg. 1.1
 E44 114 UVDAL<5> GATEARRAY1 Pg. 1.7
 E73 4 D<3> F373 Pg. 1.2
 E99 7 A<5> F245 Pg. 1.2

UVDAL6 -1.03 0.09 UVDAL<6>H Pg. 1.1
 E42 66 DAL<6> DC337 Pg. 1.1
 E43 62 DAL<6> DC333 Pg. 1.1
 E44 115 UVDAL<6> GATEARRAY1 Pg. 1.7
 E46 13 D<4> F373 Pg. 1.2
 E99 5 A<6> F245 Pg. 1.2

UVDAL7 -1.03 0.09 UVDAL<7>H Pg. 1.1
 E42 67 DAL<7> DC337 Pg. 1.1
 E43 59 DAL<7> DC333 Pg. 1.1
 E44 116 UVDAL<7> GATEARRAY1 Pg. 1.7
 E53 17 D<5> F373 Pg. 1.2
 E99 5 A<7> F245 Pg. 1.2

UVDAL8 -1.03 0.09 UVDAL<8>H Pg. 1.1
 E42 3 DAL<8> DC337 Pg. 1.1
 E43 58 DAL<8> DC333 Pg. 1.1
 E44 118 UVDAL<8> GATEARRAY1 Pg. 1.7
 E53 14 D<6> F373 Pg. 1.2
 E99 9 A<8> F245 Pg. 1.2

UVDAL9 -1.03 0.09 UVDAL<9>H Pg. 1.1
 E42 4 DAL<9> DC337 Pg. 1.1
 E43 57 DAL<9> DC333 Pg. 1.1
 E44 119 UVDAL<9> GATEARRAY1 Pg. 1.7
 E53 18 D<7> F373 Pg. 1.2
 E99 8 A<9> F245 Pg. 1.2

UVDALMAL -1.9 0.095 UVDAL->MAL(L) Pg. 2.1
 E27 10 07 825105 Pg. 2.1
 E39 17 113 825167 Pg. 2.1
 E46 1 -0E F373 Pg. 1.2
 E53 1 -0E F373 Pg. 1.2
 E73 1 -0E F373 Pg. 1.2

UVDDEL -0.01 0.01 UVDDEL(L) Pg. 1.1
 E43 20 -DBE DC333 Pg. 1.1
 E44 6 -UVDDE GATEARRAY1 Pg. 1.7

UVDSL -0.01 0.01 UVDSL(L) Pg. 1.1
 E43 29 -D5 DC333 Pg. 1.1
 E44 7 -UVD5 GATEARRAY1 Pg. 1.7

UVEPSL -0.02 0.02 UVEPS(L) Pg. 1.1
 E42 54 -EPS DC337 Pg. 1.1
 E43 23 -EPS DC333 Pg. 1.1
 E44 5 -UVEF GATEARRAY1 Pg. 1.7

UVERRL -0.21 0.06 UVERR(L) Pg. 2.1
 E27 9 10 825105 Pg. 2.1
 E39 5 13 825167 Pg. 2.1
 E43 20 -ERR DC333 Pg. 1.1
 E44 14 -LVERR GATEARRAY1 Pg. 1.7

UVHALTL -0.01 0.01 UVHALT(L) Pg. 1.1
 E43 11 -HALT DC333 Pg. 1.1
 E44 94 -UVHALT GATEARRAY1 Pg. 1.7

UVRDYL -0.01 0.01 UVRDY(L) Pg. 1.1
 E38 13 -<0> F02 Pg. 1.1
 E43 19 -RDY DC333 Pg. 1.1

UVRESETL -0.62 0.04 UVRESE(L) Pg. 1.7
 E32 5 A<0> F3- Pg. 1.7
 E42 16 -RESET DC337 Pg. 1.1
 E43 16 -RESET DC333 Pg. 1.1
 E44 95 -UVRESE GATEARRAY1 Pg. 1.7

UVWRH -4.06 0.265 UVWR(H) Pg. 1.6
 E7 11 T3 8641 Pg. 1.6
 E9 3 DIR L5646 Pg. 1.5
 E10 3 DIR L5646 Pg. 1.5
 E25 1 A<0> L504 Pg. 1.6
 E26 23 I7 825167 Pg. 2.2
 E32 8 -Y<0> F04- Pg. 1.1
 E33 3 15 825167 Pg. 2.1
 E40 6 15 16L8A Pg. 1.4
 E45 80 UVWR GATEARRAY2 Pg. 1.4
 E52 1 DIR F245 Pg. 1.2
 E7 1 DIR F245 Pg. 1.2
 E85 1 DIR F245 Pg. 1.2
 E99 1 DIR F245 Pg. 1.2

UVWRL -0.63 0.05 UVWR(L) Pg. 1.8
 E14 15 -R/W MC146818 Pg. 1.8
 E32 9 A<0> F04 Pg. 1.1
 E42 55 -WR DC337 Pg. 1.1
 E43 21 -WR DC333 Pg. 1.1
 E44 4 -UVWR GATEARRAY1 Pg. 1.7

V12REFH 0.0 0.0 V1.2REF(H) Pg. 1.8
 C29 1 A<0> CAP Pg. 1.8
 D5 1 A ZDIODE Pg. 1.8
 E29 2 IN+ LM211 Pg. 1.8
 R23 2 A<0> SIP2A Pg. 1.8

V43REFH 0.0 0.0 V4.3REF(H) Pg. 1.9
 D1 1 A ZDIODE Pg. 1.9
 D2 1 A DIODE Pg. 1.9

VALIDH -0.61 0.08 VALID(H) Pg. 1.5
 E3 11 03<15> 5555 Pg. 1.5
 E9 20 B<7> L5646 Pg. 1.5
 E26 2 16 825167 Pg. 2.2
 E33 2 16 825167 Pg. 2.2

W1P2H -0.02 0.02 W1P2(H) Pg. 1.9
 E21 27 AD<14> 27255 Pg. 1.9
 E22 27 AD<14> 27255 Pg. 1.9
 W1 2 B JUMPER Pg. 1.9
 W2 2 B JUMPER Pg. 1.9

WRMAPL -0.02 0.02 WR MAP(L) Pg. 1.5
 E3 27 -WR 5555 Pg. 1.5
 E4 27 -WR 5555 Pg. 1.5
 E40 14 02 16L8A Pg. 1.4

XDAL0 0.0 0.0 XDAL<0>H Pg. 1.6
 E11 13 A<0> DC021 Pg. 1.4
 E45 13 XDAL<0> GATEARRAY2 Pg. 1.4

XDAL1 0.0 0.0 XDAL<1>H Pg. 1.6
 E11 14 A<1> DC021 Pg. 1.4
 E45 12 XDAL<1> GATEARRAY2 Pg. 1.4

XDAL10 0.0 0.0 XDAL<10>H Pg. 1.6
 E36 13 A<10> DC021 Pg. 1.4
 E45 26 XDAL<10> GATEARRAY2 Pg. 1.4

XDAL11 0.0 0.0 XDAL<11>H Pg. 1.6
 E36 14 A<11> DC021 Pg. 1.6
 E45 25 XDAL<11> GATEARRAY2 Pg. 1.4

XDAL12 0.0 0.0 XDAL<12>H Pg. 1.6
 E36 15 A<12> DC021 Pg. 1.6
 E45 33 XDAL<12> GATEARRAY2 Pg. 1.4

XDAL13 0.0 0.0 XDAL<13>H Pg. 1.6
 E36 16 A<13> DC021 Pg. 1.4
 E45 29 XDAL<13> GATEARRAY2 Pg. 1.4

XDAL14 -2.01 0.09 XDAL<14>H Pg. 1.5
 E1 15 D<0> L5373 Pg. 1.6
 E36 17 A<14> DC021 Pg. 1.6
 E45 27 XDAL<14> GATEARRAY2 Pg. 1.4

XDAL15 -2.01 0.09 XDAL<15>H Pg. 1.5
 E1 17 D<1> L5373 Pg. 1.6
 E36 18 A<15> DC021 Pg. 1.6
 E45 28 XDAL<15> GATEARRAY2 Pg. 1.4

XDAL16 -2.01 0.09 XDAL<16>H Pg. 1.5
 E1 4 D<2> L5373 Pg. 1.6
 E11 17 A<16> DC021 Pg. 1.6
 E44 27 XDAL<16> GATEARRAY1 Pg. 1.7

XDAL17 -2.01 0.09 XDAL<17>H Pg. 1.5
 E1 13 D<3> L5373 Pg. 1.6
 E11 16 A<17> DC021 Pg. 1.6
 E44 28 XDAL<17> GATEARRAY1 Pg. 1.7

XDAL18 -2.01 0.09 XDAL<18>H Pg. 1.5
 E1 14 D<4> L5373 Pg. 1.6
 E11 11 A<18> DC021 Pg. 1.6
 E44 29 XDAL<18> GATEARRAY1 Pg. 1.7

XDAL19 -2.01 0.09 XDAL<19>H Pg. 1.5
 E1 7 D<5> L5373 Pg. 1.6
 E11 12 A<19> DC021 Pg. 1.6
 E44 31 XDAL<19> GATEARRAY1 Pg. 1.7

XDAL2 0.0 0.0 XDAL<2>H Pg. 1.6
 E30 16 A<2> DC021 Pg. 1.4
 E45 15 XDAL<2> GATEARRAY2 Pg. 1.4

XDAL20 -2.01 0.09 XDAL<20>H Pg. 1.5
 E1 8 D<6> L5373 Pg. 1.6
 E30 18 A<20> DC021 Pg. 1.6
 E44 32 XDAL<20> GATEARRAY1 Pg. 1.7

XDAL21 -2.01 0.09 XDAL<21>H Pg. 1.5
 E1 3 D<7> L5373 Pg. 1.6
 E30 17 A<21> DC021 Pg. 1.6
 E44 33 XDAL<21> GATEARRAY1 Pg. 1.7

XDAL3 0.0 0.0 XDAL<3>H Pg. 1.5
 E30 15 A<3> DC021 Pg. 1.4
 E45 16 XDAL<3> GATEARRAY2 Pg. 1.4

XDAL4 0.0 0.0 XDAL<4>H Pg. 1.6
 E30 14 A<4> DC021 Pg. 1.4
 E45 17 XDAL<4> GATEARRAY2 Pg. 1.4

XDAL5 0.0 0.0 XDAL<5>H Pg. 1.6
 E30 13 A<5> DC021 Pg. 1.4
 E45 22 XDAL<5> GATEARRAY2 Pg. 1.4

XDAL6 0.0 0.0 XDAL<6>H Pg. 1.6
 E30 12 A<6> DC021 Pg. 1.6
 E45 20 XDAL<6> GATEARRAY2 Pg. 1.4

XDAL7 0.0 0.0 XDAL<7>H Pg. 1.6
 E30 11 A<7> DC021 Pg. 1.4
 E45 24 XDAL<7> GATEARRAY2 Pg. 1.4

XDAL8 0.0 0.0 XDAL<8>H Pg. 1.6
 E36 11 A<8> DC021 Pg. 1.4
 E45 23 XDAL<8> GATEARRAY2 Pg. 1.4

XDAL9 0.0 0.0 XDAL<9>H Pg. 1.5
 E36 12 A<9> DC021 Pg. 1.4
 E45 21 XDAL<9> GATEARRAY2 Pg. 1.4

XDBIRCH -0.02 0.02 XDBIRCH(H) Pg. 1.7
 E44 65 XDBIR RO GATEARRAY1 Pg. 1.7
 E45 107 XDBIR RO GATEARRAY2 Pg. 1.4
 R23 1 A<0> SIP2A Pg. 1.4

XDMAOPEH -0.020 0.06 XDMA OPE(H) Pg. 1.5
 E9 23 CBA L5646 Pg. 1.5
 E10 23 CBA L5646 Pg. 1.5
 E44 79 XDMA OPE GATEARRAY1 Pg. 1.7
 E45 111 XDMA OPE GATEARRAY2 Pg. 1.4
 R10 2 A<0> SIP2A Pg. 1.4

XLATAD10 -0.81 0.05 XLAT AD<10>H Pg. 1.5
 E4 18 DB<1> 5555 Pg. 1.5
 E6 17 D<1> L5373 Pg. 1.5
 E10 14 B<1> L5646 Pg. 1.5

XLATAD11 -0.81 0.05 XLAT AD<11>H Pg. 1.5
 E4 17 DB<2> 5555 Pg. 1.5
 E6 14 D<2> L5373 Pg. 1.5
 E10 15 B<2> L5646 Pg. 1.5

XLATAD12 -0.81 0.05 XLAT AD<12>H Pg. 1.5
 E4 16 DB<3> 5555 Pg. 1.5
 E6 13 D<3> L5373 Pg. 1.5
 E10 16 B<3> L5646 Pg. 1.5

XLATAD13 -0.81 0.05 XLAT AD<13>H Pg. 1.5
 E4 15 DB<4> 5555 Pg. 1.5
 E6 4 D<4> L5373 Pg. 1.5
 E10 17 B<4> L5646 Pg. 1.5

XLATAD14 -0.81 0.05 XLAT AD<14>H Pg. 1.5
 E2 8 D<5> L5373 Pg. 1.5
 E4 13 DB<5> 5555 Pg. 1.5
 E10 18 B<5> L5646 Pg. 1.5

XLATAD15 -0.81 0.05 XLAT AD<15>H Pg. 1.5
 E2 3 D<6> L5373 Pg. 1.5
 E4 12 DB<6> 5555 Pg. 1.5
 E10 19 B<6> L5646 Pg. 1.5

REVISIONS
 1. CHANGE NO. 1 PEV
 2. CHANGE NO. 1 PEV
 3. CHANGE NO. 1 PEV
 4. CHANGE NO. 1 PEV
 5. CHANGE NO. 1 PEV
 6. CHANGE NO. 1 PEV
 7. CHANGE NO. 1 PEV
 8. CHANGE NO. 1 PEV
 9. CHANGE NO. 1 PEV
 10. CHANGE NO. 1 PEV
 11. CHANGE NO. 1 PEV
 12. CHANGE NO. 1 PEV
 13. CHANGE NO. 1 PEV
 14. CHANGE NO. 1 PEV
 15. CHANGE NO. 1 PEV
 16. CHANGE NO. 1 PEV
 17. CHANGE NO. 1 PEV
 18. CHANGE NO. 1 PEV
 19. CHANGE NO. 1 PEV
 20. CHANGE NO. 1 PEV
 21. CHANGE NO. 1 PEV
 22. CHANGE NO. 1 PEV
 23. CHANGE NO. 1 PEV
 24. CHANGE NO. 1 PEV
 25. CHANGE NO. 1 PEV
 26. CHANGE NO. 1 PEV
 27. CHANGE NO. 1 PEV
 28. CHANGE NO. 1 PEV
 29. CHANGE NO. 1 PEV
 30. CHANGE NO. 1 PEV
 31. CHANGE NO. 1 PEV
 32. CHANGE NO. 1 PEV
 33. CHANGE NO. 1 PEV
 34. CHANGE NO. 1 PEV
 35. CHANGE NO. 1 PEV
 36. CHANGE NO. 1 PEV
 37. CHANGE NO. 1 PEV
 38. CHANGE NO. 1 PEV
 39. CHANGE NO. 1 PEV
 40. CHANGE NO. 1 PEV
 41. CHANGE NO. 1 PEV
 42. CHANGE NO. 1 PEV
 43. CHANGE NO. 1 PEV
 44. CHANGE NO. 1 PEV
 45. CHANGE NO. 1 PEV
 46. CHANGE NO. 1 PEV
 47. CHANGE NO. 1 PEV
 48. CHANGE NO. 1 PEV
 49. CHANGE NO. 1 PEV
 50. CHANGE NO. 1 PEV
 51. CHANGE NO. 1 PEV
 52. CHANGE NO. 1 PEV
 53. CHANGE NO. 1 PEV
 54. CHANGE NO. 1 PEV
 55. CHANGE NO. 1 PEV
 56. CHANGE NO. 1 PEV
 57. CHANGE NO. 1 PEV
 58. CHANGE NO. 1 PEV
 59. CHANGE NO. 1 PEV
 60. CHANGE NO. 1 PEV
 61. CHANGE NO. 1 PEV
 62. CHANGE NO. 1 PEV
 63. CHANGE NO. 1 PEV
 64. CHANGE NO. 1 PEV
 65. CHANGE NO. 1 PEV
 66. CHANGE NO. 1 PEV
 67. CHANGE NO. 1 PEV
 68. CHANGE NO. 1 PEV
 69. CHANGE NO. 1 PEV
 70. CHANGE NO. 1 PEV
 71. CHANGE NO. 1 PEV
 72. CHANGE NO. 1 PEV
 73. CHANGE NO. 1 PEV
 74. CHANGE NO. 1 PEV
 75. CHANGE NO. 1 PEV
 76. CHANGE NO. 1 PEV
 77. CHANGE NO. 1 PEV
 78. CHANGE NO. 1 PEV
 79. CHANGE NO. 1 PEV
 80. CHANGE NO. 1 PEV
 81. CHANGE NO. 1 PEV
 82. CHANGE NO. 1 PEV
 83. CHANGE NO. 1 PEV
 84. CHANGE NO. 1 PEV
 85. CHANGE NO. 1 PEV
 86. CHANGE NO. 1 PEV
 87. CHANGE NO. 1 PEV
 88. CHANGE NO. 1 PEV
 89. CHANGE NO. 1 PEV
 90. CHANGE NO. 1 PEV
 91. CHANGE NO. 1 PEV
 92. CHANGE NO. 1 PEV
 93. CHANGE NO. 1 PEV
 94. CHANGE NO. 1 PEV
 95. CHANGE NO. 1 PEV
 96. CHANGE NO. 1 PEV
 97. CHANGE NO. 1 PEV
 98. CHANGE NO. 1 PEV
 99. CHANGE NO. 1 PEV
 100. CHANGE NO. 1 PEV

digital
 DATE: 11-10-80
 TITLE: KAS20 CROSS REFERENCE SIGNALS
 DDD 1M7478-0-0
 FIRST USED ON OPTION/MODEL: B-DD-M7478-0

XLATAD16 -0.81 0.05 XLAT AD<16>H
 E4 11 DB<7> 5565 Pg. 1.5
 E6 3 D<7> LS373 Pg. 1.5
 E10 20 B<7> LS646 Pg. 1.5

XLATAD17 -0.81 0.05 XLAT AD<17>H
 E2 18 D<8> LS373 Pg. 1.5
 E3 19 DB<8> 5565 Pg. 1.5
 E9 13 B<8> LS646 Pg. 1.5

XLATAD18 -0.81 0.05 XLAT AD<18>H
 E2 14 D<9> LS373 Pg. 1.5
 E3 18 DB<9> 5565 Pg. 1.5
 E9 14 B<9> LS646 Pg. 1.5

XLATAD19 -0.81 0.05 XLAT AD<19>H
 E2 17 D<10> LS373 Pg. 1.5
 E3 17 DB<10> 5565 Pg. 1.5
 E9 15 B<10> LS646 Pg. 1.5

XLATAD20 -0.81 0.05 XLAT AD<20>H
 E2 13 D<11> LS373 Pg. 1.5
 E3 16 DB<11> 5565 Pg. 1.5
 E9 16 B<11> LS646 Pg. 1.5

XLATAD21 -0.81 0.05 XLAT AD<21>H
 E3 15 DB<12> 5565 Pg. 1.5
 E6 7 D<12> LS373 Pg. 1.5
 E9 17 B<12> LS646 Pg. 1.5

XLATAD22 -0.81 0.05 XLAT AD<22>H
 E2 7 D<13> LS373 Pg. 1.5
 E3 13 DB<13> 5565 Pg. 1.5
 E9 18 B<13> LS646 Pg. 1.5

XLATAD23 -0.81 0.05 XLAT AD<23>H
 E2 4 D<14> LS373 Pg. 1.5
 E3 12 DB<14> 5565 Pg. 1.5
 E9 19 B<14> LS646 Pg. 1.5

XLATAD9 -0.81 0.05 XLAT AD<9>H
 E4 19 DB<0> 5565 Pg. 1.5
 E6 18 D<0> LS373 Pg. 1.5
 E10 13 B<0> LS646 Pg. 1.5

XWTBTH -1.71 0.095 XWTBT(H)
 E11 15 A<22> DC021 Pg. 1.6
 E33 3 15 825167 Pg. 2.2
 E45 32 XWTBT GATEARRAY2 Pg. 1.4

END GLOBAL SIGNAL CROSS REFERENCE

THIS DRAWING AND SPECIFICATIONS
 HEREIN ARE THE PROPERTY OF
 DIGITAL EQUIPMENT CORPORATION AND
 SHALL NOT BE REPRODUCED OR COPIED
 OR USED IN WHOLE OR IN PART AS
 THE BASIS FOR THE MANUFACTURE OR
 SALE OF ITEMS WITHOUT WRITTEN
 PERMISSION. COPYRIGHT © 1980
 DIGITAL EQUIPMENT CORPORATION

REVISIONS
CHK CHANGE NO. REV

digital	DRN. ERW	DATE 5-19-80	ENG ERW	DATE 8-18-80	TITLE: KA620 CROSS REFERENCE SIGNALS
	CHK'D ERW	DATE 8-18-80	BOARD LOCATION: 13 OF 24	SIZE CODE D DO	NUMBER M7478-0-0
DSK:NA5RT.		NEXT HIGHER ASSEMBLY: B-DD-M7478-0		REV. A	
FIRST USED ON OPTION/MODEL:					

GLOBAL PART CROSS REFERENCE - 12-OCT-1984

AA1 FINGER
1 BIRQL5 BIRQL5>L Pg. 1.6

AA2 FINGER
1 A50V +5.0V Pg. 1.11

AB1 FINGER
1 BIRQL6 BIRQL6>L Pg. 1.6

AC1 FINGER
1 BDALL16 BDAL<16>L Pg. 1.6

AC2 FINGER
1 GND GND Pg. 1.11

AD1 FINGER
1 BDALL17 BDAL<17>L Pg. 1.6

AD2 FINGER
1 A120V +12.0V Pg. 1.11

AE2 FINGER
1 BDOUTL BDOUT<L> Pg. 1.6

AF1 FINGER
1 SRUNL SRUN<L> Pg. 1.10

AF2 FINGER
1 BRPLYL BRPLY<L> Pg. 1.6

AH2 FINGER
1 BDINL BDIN<L> Pg. 1.6

AJ1 FINGER
1 GND GND Pg. 1.11

AJ2 FINGER
1 BSYNCL BSYN<L> Pg. 1.6

AK2 FINGER
1 BWTBTL BWTB<L> Pg. 1.6

AL2 FINGER
1 BIRQL4 BIRQL4>L Pg. 1.6

AM1 FINGER
1 GND GND Pg. 1.11

AM2 FINGER
1 BIAKIL BIAK<L> Pg. 1.6

AN1 FINGER
1 BDMRL BDMR<L> Pg. 1.6

AN2 FINGER
1 BIAKOL BIAK<L> Pg. 1.6

AP1 FINGER
1 BHALTL BHAL<L> Pg. 1.6

AP2 FINGER
1 BBS7L BBS7<L> Pg. 1.6

AR1 FINGER
1 BREFL BRE<L> Pg. 1.6

AR2 FINGER
1 BDMGIL BDMG<L> Pg. 1.6

AS2 FINGER
1 BDMGOL BDMG<L> Pg. 1.6

AT1 FINGER
1 GND GND Pg. 1.11

AT2 FINGER
1 BINITL BINIT<L> Pg. 1.6

AU2 FINGER
1 BDALL0 BDAL<0>L Pg. 1.6

AV2 FINGER
1 BDALL1 BDAL<1>L Pg. 1.6

BA1 FINGER
1 BDCOKH BDCOK<H> Pg. 1.6

BA2 FINGER
1 A50V +5.0V Pg. 1.11

BB1 FINGER
1 BPOKH BPC<H> Pg. 1.6

BC1 FINGER
1 BDALL18 BDAL<18>L Pg. 1.6

BC2 FINGER
1 GND GND Pg. 1.11

BD1 FINGER
1 BDALL19 BDAL<19>L Pg. 1.6

BE1 FINGER
1 BDALL20 BDAL<20>L Pg. 1.6

BE2 FINGER
1 BDALL2 BDAL<2>L Pg. 1.6

BF1 FINGER
1 BDALL21 BDAL<21>L Pg. 1.6

BF2 FINGER
1 BDALL3 BDAL<3>L Pg. 1.6

BH2 FINGER
1 BDALL4 BDAL<4>L Pg. 1.6

BJ1 FINGER
1 GND GND Pg. 1.11

BJ2 FINGER
1 BDALL5 BDAL<5>L Pg. 1.6

BK2 FINGER
1 BDALL6 BDAL<6>L Pg. 1.6

BL2 FINGER
1 BDALL7 BDAL<7>L Pg. 1.6

BM1 FINGER
1 GND GND Pg. 1.11

BM2 FINGER
1 BDALL8 BDAL<8>L Pg. 1.6

BN1 FINGER
1 BSACKL BSACK<L> Pg. 1.6

BN2 FINGER
1 BDALL9 BDAL<9>L Pg. 1.6

BP1 FINGER
1 BIRQL7 BIRQL7>L Pg. 1.6

BP2 FINGER
1 BDALL10 BDAL<10>L Pg. 1.6

BR1 FINGER
1 BEVENTL BEVENT<L> Pg. 1.6

BR2 FINGER
1 BDALL11 BDAL<11>L Pg. 1.6

BS2 FINGER
1 BDALL12 BDAL<12>L Pg. 1.6

BT1 FINGER
1 GND GND Pg. 1.11

BT2 FINGER
1 BDALL13 BDAL<13>L Pg. 1.6

BU2 FINGER
1 BDALL14 BDAL<14>L Pg. 1.6

BV1 FINGER
1 A50V +5.0V Pg. 1.11

BV2 FINGER
1 BDALL15 BDAL<15>L Pg. 1.6

C1 CAP
1 A50V +5.0V Pg. 1.11
2 GND GND Pg. 1.11

C2 CAP
1 A50V +5.0V Pg. 1.11
2 GND GND Pg. 1.11

C3 CAP
1 A50V +5.0V Pg. 1.11
2 GND GND Pg. 1.11

C4 CAP
1 A50V +5.0V Pg. 1.11
2 GND GND Pg. 1.11

C5 CAP
1 A50V +5.0V Pg. 1.11
2 GND GND Pg. 1.11

C6 CAP
1 A50V +5.0V Pg. 1.11
2 GND GND Pg. 1.11

C7 CAP
1 A50V +5.0V Pg. 1.11
2 GND GND Pg. 1.11

C8 CAP
1 A50V +5.0V Pg. 1.11
2 GND GND Pg. 1.11

C9 CAP
1 A50V +5.0V Pg. 1.11
2 GND GND Pg. 1.11

C10 CAP
1 A50V +5.0V Pg. 1.11
2 GND GND Pg. 1.11

C11 CAP
1 A50V +5.0V Pg. 1.11
2 GND GND Pg. 1.11

C12 CAP
1 A50V +5.0V Pg. 1.11
2 GND GND Pg. 1.11

C13 CAP
1 A50V +5.0V Pg. 1.11
2 GND GND Pg. 1.11

C14 CAP
1 A52V +5.0V Pg. 1.11
2 GND GND Pg. 1.11

C15 CAP
1 A52V +5.0V Pg. 1.11
2 GND GND Pg. 1.11

C16 CAP
1 A52V +5.0V Pg. 1.11
2 GND GND Pg. 1.11

C17 CAP
1 A52V +5.0V Pg. 1.11
2 GND GND Pg. 1.11

C18 CAP
1 A52V +5.0V Pg. 1.11
2 GND GND Pg. 1.11

C19 CAP
1 A52V +5.0V Pg. 1.11
2 GND GND Pg. 1.11

C20 CAP
1 A52V +5.0V Pg. 1.11
2 GND GND Pg. 1.11

C21 CAP
1 A52V +5.0V Pg. 1.11
2 GND GND Pg. 1.11

C22 CAP
1 A52V +5.0V Pg. 1.11
2 GND GND Pg. 1.11

C23 CAP
1 A53V +5.0V Pg. 1.11
2 GND GND Pg. 1.11

C24 CAP
1 A52V +5.0V Pg. 1.11
2 GND GND Pg. 1.11

C25 CAP
1 A52V +5.0V Pg. 1.11
2 GND GND Pg. 1.11

C26 CAP
1 A52V +5.0V Pg. 1.11
2 GND GND Pg. 1.11

C27 CAP
1 A52V +5.0V Pg. 1.11
2 GND GND Pg. 1.11

C28 CAP
1 E35P6L E35P6<L> Pg. 1.8
2 GND GND Pg. 1.8

C29 CAP
1 V12REFH V1.2REF<H> Pg. 1.8
2 BTVREFH BTVREF<H> Pg. 1.8

C30 CAP
1 E15P7H E15P7<H> Pg. 1.9
2 D2ANODEH D2ANODE<H> Pg. 1.9

C31 CAP
1 E15P5H E15P5<H> Pg. 1.9
2 D4CATHODEL D4CATHODE<L> Pg. 1.9

C32 CAP
1 GND GND Pg. 1.9
2 A120VL 12.0V L Pg. 1.9

THIS DRAWING AND SPECIFICATIONS
HEREIN ARE THE PROPERTY OF
DIGITAL EQUIPMENT CORPORATION AND
SHALL NOT BE REPRODUCED OR COPIED
OR USED IN WHOLE OR IN PART AS
THE BASIS FOR THE MANUFACTURE OR
REPAIR OF ANY ITEM WITHOUT WRITTEN
PERMISSION. COPYRIGHT © 1984
DIGITAL EQUIPMENT CORPORATION

REVISIONS	
CHK	CHANGE NO. REV

DIGITAL	DATE	ENG	DATE	TITLE
	8-19-84	ERW	8-19-84	KA620 CROSS REFERENCE SIGNALS
CHK	DATE	BOARD LOCATION	SHEET	OF
ERW	8-19-84	14	24	
DSK:	NEXT HIGHER ASSEMBLY:	SIZE	CODE	NUMBER
FIRST USED ON OPTION/MODEL:	B-DD-M7478-0	D	DD	M7478-0-0
				REV. A

8	7	6	5	4	3	2	1
<p>C33 CAP 1 GND Pg. 1.9 2 A120VL 12.0V L Pg. 1.9</p> <p>C34 CAP 1 A120V +12.0V Pg. 1.9 2 GND GND Pg. 1.9</p> <p>C35 CAP 1 BTRYVIH BTRYVI(H) Pg. 1.8 2 GND GND Pg. 1.8</p> <p>C37 CAP 1 A50V +5.0V Pg. 1.11 2 GND GND Pg. 1.11</p> <p>C38 CAP 1 A50V +5.0V Pg. 1.11 2 GND GND Pg. 1.11</p> <p>C39 CAP 1 A120V +12.0V Pg. 1.11 2 GND GND Pg. 1.11</p> <p>C40 CAP 1 DRDCOKH DRDCOK(H) Pg. 1.7 2 GND GND Pg. 1.7</p> <p>C41 CAP 1 BTVREFH BTVREF(H) Pg. 1.8 2 GND GND Pg. 1.8</p> <p>C42 CAP 1 A50V +5.0V Pg. 1.11 2 GND GND Pg. 1.11</p> <p>C43 CAP 1 A50V +5.0V Pg. 1.11 2 GND GND Pg. 1.11</p> <p>C44 CAP 1 A50V +5.0V Pg. 1.11 2 GND GND Pg. 1.11</p> <p>C45 CAP 1 A50V +5.0V Pg. 1.11 2 GND GND Pg. 1.11</p> <p>C46 CAP 1 A50V +5.0V Pg. 1.11 2 GND GND Pg. 1.11</p> <p>C47 CAP 1 A50V +5.0V Pg. 1.11 2 GND GND Pg. 1.11</p> <p>C48 CAP 1 A50V +5.0V Pg. 1.11 2 GND GND Pg. 1.11</p> <p>C49 CAP 1 A50V +5.0V Pg. 1.11 2 GND GND Pg. 1.11</p> <p>C50 CAP 1 A50V +5.0V Pg. 1.11 2 GND GND Pg. 1.11</p> <p>C51 CAP 1 A50V +5.0V Pg. 1.11 2 GND GND Pg. 1.11</p> <p>C52 CAP 1 A50V +5.0V Pg. 1.11 2 GND GND Pg. 1.11</p>	<p>C53 CAP 1 A50V +5.0V Pg. 1.11 2 GND GND Pg. 1.11</p> <p>C54 CAP 1 A50V +5.0V Pg. 1.11 2 GND GND Pg. 1.11</p> <p>C55 CAP 1 A50V +5.0V Pg. 1.11 2 GND GND Pg. 1.11</p> <p>C56 CAP 1 A50V +5.0V Pg. 1.11 2 GND GND Pg. 1.11</p> <p>C57 CAP 1 A50V +5.0V Pg. 1.11 2 GND GND Pg. 1.11</p> <p>C58 CAP 1 A50V +5.0V Pg. 1.11 2 GND GND Pg. 1.11</p> <p>C59 CAP 1 A50V +5.0V Pg. 1.11 2 GND GND Pg. 1.11</p> <p>C60 CAP 1 A50V +5.0V Pg. 1.11 2 GND GND Pg. 1.11</p> <p>C61 CAP 1 A50V +5.0V Pg. 1.11 2 GND GND Pg. 1.11</p> <p>C62 CAP 1 A50V +5.0V Pg. 1.11 2 GND GND Pg. 1.11</p> <p>C63 CAP 1 A50V +5.0V Pg. 1.11 2 GND GND Pg. 1.11</p> <p>C64 CAP 1 A50V +5.0V Pg. 1.11 2 GND GND Pg. 1.11</p> <p>C65 CAP 1 A50V +5.0V Pg. 1.11 2 GND GND Pg. 1.11</p> <p>C66 CAP 1 A50V +5.0V Pg. 1.11 2 GND GND Pg. 1.11</p> <p>C67 CAP 1 SIL SI(L) Pg. 1.9 2 SIH SI(H) Pg. 1.9</p> <p>C68 CAP 1 A120V +12.0V Pg. 1.11 2 GND GND Pg. 1.11</p> <p>C69 CAP 1 A120V +12.0V Pg. 1.11 2 GND GND Pg. 1.11</p> <p>C71 CAP 1 A50V +5.0V Pg. 1.11 2 GND GND Pg. 1.11</p> <p>C72 CAP 1 A50V +5.0V Pg. 1.11 2 GND GND Pg. 1.11</p>	<p>C73 CAP 1 A50V +5.0V Pg. 1.11 2 GND GND Pg. 1.11</p> <p>C74 CAP 1 A50V +5.0V Pg. 1.11 2 GND GND Pg. 1.11</p> <p>C75 CAP 1 A50V +5.0V Pg. 1.11 2 GND GND Pg. 1.11</p> <p>C76 CAP 1 A50V +5.0V Pg. 1.11 2 GND GND Pg. 1.11</p> <p>C77 CAP 1 A50V +5.0V Pg. 1.11 2 GND GND Pg. 1.11</p> <p>C78 CAP 1 A50V +5.0V Pg. 1.11 2 GND GND Pg. 1.11</p> <p>C79 CAP 1 A50V +5.0V Pg. 1.11 2 GND GND Pg. 1.11</p> <p>C80 CAP 1 A50V +5.0V Pg. 1.11 2 GND GND Pg. 1.11</p> <p>CA2 FINGER 1 A50V +5.0V Pg. 1.3</p> <p>CB2 FINGER 1 MAAL9 MAA<9>L Pg. 1.3</p> <p>CC2 FINGER 1 GND GND Pg. 1.3</p> <p>CD2 FINGER 1 RAS5 RAS<5>H Pg. 1.3</p> <p>CE2 FINGER 1 BMCAS0 BMCAS<0>H Pg. 1.3</p> <p>CF2 FINGER 1 RAS1 RAS<1>H Pg. 1.3</p> <p>CH2 FINGER 1 BMCAS1 BMCAS<1>H Pg. 1.3</p> <p>CJ2 FINGER 1 MSIDL0 MSID<0>L Pg. 1.3</p> <p>CK2 FINGER 1 MSWT1 MSWT<1>H Pg. 1.3</p> <p>CL2 FINGER 1 RAS4 RAS<4>H Pg. 1.3</p> <p>CM2 FINGER 1 MSIDL1 MSID<1>L Pg. 1.3</p> <p>CN2 FINGER 1 MAAL1 MAA<1>L Pg. 1.3</p> <p>CP2 FINGER 1 MAAL2 MAA<2>L Pg. 1.3</p> <p>CR2 FINGER 1 MAAL0 MAA<0>L Pg. 1.3</p>	<p>C52 FINGER 1 MAAL8 MAA<8>L Pg. 1.3</p> <p>CT1 FINGER 1 GND GND Pg. 1.3</p> <p>CT2 FINGER 1 MSIDL4 MSID<4>L Pg. 1.3</p> <p>CU2 FINGER 1 RAS0 RAS<0>H Pg. 1.3</p> <p>D1 ZDIODE 1 V43REFH V4.3REF(H) Pg. 1.9 2 GND GND Pg. 1.9</p> <p>D2 DIODE 1 V43REFH V4.3REF(H) Pg. 1.9 2 D2ANODEH D2ANODE(H) Pg. 1.9</p> <p>D3 DIODE 1 D2ANODEH D2ANODE(H) Pg. 1.9 2 D4CATHODEL D4CATHODE(L) Pg. 1.9</p> <p>D4 DIODE 1 D4CATHODEL D4CATHODE(L) Pg. 1.9 2 A120VL 12.0V L Pg. 1.9</p> <p>D5 ZDIODE 1 V12REFH V1.2REF(H) Pg. 1.8 2 GND GND Pg. 1.8</p> <p>D6 DIODE 1 A50V +5.0V Pg. 1.8 2 UNIDIODE20P920 UNS1\$DIODE\$20P\$B\$2<0>H Pg. 1.8</p> <p>D7 DIODE 1 BTRYVIH BTRYVI(H) Pg. 1.8 2 A50V +5.0V Pg. 1.8</p> <p>D8 DIODE 1 BTRYVIH BTRYVI(H) Pg. 1.8 2 UNIDIODE20P820 UNS1\$DIODE\$20P\$B\$2<0>H Pg. 1.8</p> <p>D9 DIODE 1 A50V +5.0V Pg. 1.7 2 DRDCOKH DRDCOK(H) Pg. 1.7</p> <p>D10 LEDPACK 1 A50V +5.0V Pg. 1.10 2 J2P11L J2P11(L) Pg. 1.10</p> <p>D11 LEDPACK 1 A50V +5.0V Pg. 1.10 2 J2P9L J2P9(L) Pg. 1.10</p> <p>D12 LEDPACK 1 A50V +5.0V Pg. 1.10 2 J2P8L J2P8(L) Pg. 1.10</p> <p>D13 LEDPACK 1 A50V +5.0V Pg. 1.10 2 J2P7L J2P7(L) Pg. 1.10</p> <p>D14 LEDPACK 1 A50V +5.0V Pg. 1.10 2 E41P11L E41P11(L) Pg. 1.10</p> <p>DA2 FINGER 1 A50V +5.0V Pg. 1.3</p> <p>DB2 FINGER 1 MAAL7 MAA<7>L Pg. 1.3</p>				

THIS DRAWING AND SPECIFICATIONS ARE THE PROPERTY OF DIGITAL EQUIPMENT CORPORATION AND SHALL NOT BE REPRODUCED OR COPIED IN WHOLE OR IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION. COPYRIGHT © 1986, DIGITAL EQUIPMENT CORPORATION.

REVISIONS	CHK	CHANGE NO.	REV.

digital	DRN: E.R.W.	DATE: 1-18-86	ENG: E.R.W.	DATE: 2-19-86	TITLE: KA620 CROSS REFERENCE SIGNALS
	CHK: E.R.W.	DATE: 1-18-86	LOC: 15	OF: 24	REV: A
PSK: PINSRT		NEXT HIGHER ASSEMBLY: B-DD-M7478-0		SIZE: D	CODE: DO
FIRST USED ON OPTION/MODEL:				NUMBER: M7478-0-0	REV: A

REV. A
M7478-0-0
D
B
A

DC2 FINGER 1 GND GND Pg. 1.3	DD2 FINGER 1 MAAL5 MAAL5>L Pg. 1.3	DE2 FINGER 1 MAAL4 MAAL4>L Pg. 1.3	DF2 FINGER 1 MAAL3 MAAL3>L Pg. 1.3	DH2 FINGER 1 MAAL6 MAAL6>L Pg. 1.3	DJ2 FINGER 1 MSIDL2 MSIDL2>L Pg. 1.3	DK2 FINGER 1 RAS3 RAS3>H Pg. 1.3	DL2 FINGER 1 RAS7 RAS7>H Pg. 1.3	DM2 FINGER 1 MSIDL3 MSIDL3>L Pg. 1.3	DN2 FINGER 1 RAS2 RAS2>H Pg. 1.3	DP2 FINGER 1 BMCAS2 BMCAS2>H Pg. 1.3	DR2 FINGER 1 BMCAS3 BMCAS3>H Pg. 1.3	DT1 FINGER 1 GND GND Pg. 1.3	DU2 FINGER 1 RAS6 RAS6>H Pg. 1.3	E1 LS373 1 GND GND Pg. 1.5 2 MAPAD21 MAP AD<21>H Pg. 1.5 3 XDAL21 XDAL<21>H Pg. 1.5 4 XDAL16 XDAL<16>H Pg. 1.5 5 MAPAD16 MAP AD<16>H Pg. 1.5 6 MAPAD19 MAP AD<19>H Pg. 1.5 7 XDAL19 XDAL<19>H Pg. 1.5 8 XDAL20 XDAL<20>H Pg. 1.5 9 MAPAD20 MAP AD<20>H Pg. 1.5 11 RSYNCL RSYNCL<L> Pg. 1.5 12 MAPAD17 MAP AD<17>H Pg. 1.5 13 XDAL17 XDAL<17>H Pg. 1.5 14 XDAL18 XDAL<18>H Pg. 1.5 15 MAPAD18 MAP AD<18>H Pg. 1.5 16 MAPAD15 MAP AD<15>H Pg. 1.5 17 XDAL15 XDAL<15>H Pg. 1.5 18 XDAL14 XDAL<14>H Pg. 1.5 19 MAPAD14 MAP AD<14>H Pg. 1.5	E2 LS373 1 DMAMAL DMA->MA(L) Pg. 1.5 2 MA15 MA<15>H Pg. 1.5 3 XLATAD15 XLAT AD<15>H Pg. 1.5 4 XLATAD23 XLAT AD<23>H Pg. 1.5 5 MA23 MA<23>H Pg. 1.5 6 MA22 MA<22>H Pg. 1.5 7 XLATAD22 XLAT AD<22>H Pg. 1.5 8 XLATAD14 XLAT AD<14>H Pg. 1.5 9 MA14 MA<14>H Pg. 1.5 11 GALEH GALE<H> Pg. 1.5 12 MA20 MA<20>H Pg. 1.5	E3 5555 3 MAPAD21 MAP AD<21>H Pg. 1.5 4 MAPAD16 MAP AD<16>H Pg. 1.5 5 MAPAD15 MAP AD<15>H Pg. 1.5 6 MAPAD14 MAP AD<14>H Pg. 1.5 7 MAPAD13 MAP AD<13>H Pg. 1.5 8 MAPAD12 MAP AD<12>H Pg. 1.5 9 MAPAD11 MAP AD<11>H Pg. 1.5 10 MAPAD10 MAP AD<10>H Pg. 1.5 11 MAPAD9 MAP AD<9>H Pg. 1.5 12 XLATAD23 XLAT AD<23>H Pg. 1.5 13 XLATAD22 XLAT AD<22>H Pg. 1.5 14 XLATAD21 XLAT AD<21>H Pg. 1.5 15 XLATAD20 XLAT AD<20>H Pg. 1.5 16 XLATAD19 XLAT AD<19>H Pg. 1.5 17 XLATAD18 XLAT AD<18>H Pg. 1.5 18 XLATAD17 XLAT AD<17>H Pg. 1.5 19 GND GND Pg. 1.5 20 MAPAD19 MAP AD<19>H Pg. 1.5 21 MAPDISABLEH MAP DISABLE<H> Pg. 1.5 22 MAPAD20 MAP AD<20>H Pg. 1.5 23 MAPAD18 MAP AD<18>H Pg. 1.5 24 MAPAD17 MAP AD<17>H Pg. 1.5 25 A3VA +3VA H Pg. 1.5 26 WRMAPL WR MAP<L> Pg. 1.5	E4 5565 2 MAPAD21 MAP AD<21>H Pg. 1.5 3 MAPAD16 MAP AD<16>H Pg. 1.5 4 MAPAD15 MAP AD<15>H Pg. 1.5 5 MAPAD14 MAP AD<14>H Pg. 1.5 6 MAPAD13 MAP AD<13>H Pg. 1.5 7 MAPAD12 MAP AD<12>H Pg. 1.5 8 MAPAD11 MAP AD<11>H Pg. 1.5 9 MAPAD10 MAP AD<10>H Pg. 1.5 10 MAPAD9 MAP AD<9>H Pg. 1.5 11 XLATAD16 XLAT AD<16>H Pg. 1.5 12 XLATAD15 XLAT AD<15>H Pg. 1.5 13 XLATAD14 XLAT AD<14>H Pg. 1.5 14 XLATAD13 XLAT AD<13>H Pg. 1.5 15 XLATAD12 XLAT AD<12>H Pg. 1.5 16 XLATAD11 XLAT AD<11>H Pg. 1.5 17 XLATAD10 XLAT AD<10>H Pg. 1.5 18 XLATAD9 XLAT AD<9>H Pg. 1.5 19 GND GND Pg. 1.5 20 MAPAD19 MAP AD<19>H Pg. 1.5 21 MAPDISABLEH MAP DISABLE<H> Pg. 1.5 22 MAPAD20 MAP AD<20>H Pg. 1.5 23 MAPAD18 MAP AD<18>H Pg. 1.5 24 MAPAD17 MAP AD<17>H Pg. 1.5 25 A3VA +3VA H Pg. 1.5 26 WRMAPL WR MAP<L> Pg. 1.5	E5 8641 1 BIAKOL BIAKOL<L> Pg. 1.6 2 E37P11H E37P11<H> Pg. 1.6 3 NC H Pg. 1.6 4 BDMRL BDMR<L> Pg. 1.6 5 TDMRH TDMR<H> Pg. 1.6 6 RDMRH RDMR<H> Pg. 1.6 7 ENB8641L ENB 8641<L> Pg. 1.6 8 BUVRESETH BUVRESETH<H> Pg. 1.6 9 RRPLYH RRPLY<H> Pg. 1.6 10 TRPLYH TRPLY<H> Pg. 1.6 11 BRPLYL BRPLY<L> Pg. 1.6 12 RSYNCH RSYN<H> Pg. 1.6 13 TSYNCH TSYN<H> Pg. 1.6 14 BSYNCL BSYN<L> Pg. 1.5	E6 LS373 1 DMAMAL DMA->MA(L) Pg. 1.5 2 MA16 MA<16>H Pg. 1.5 3 XLATAD16 XLAT AD<16>H Pg. 1.5 4 XLATAD13 XLAT AD<13>H Pg. 1.5 5 MA13 MA<13>H Pg. 1.5 6 MA21 MA<21>H Pg. 1.5 7 XLATAD21 XLAT AD<21>H Pg. 1.5 8 GND GND Pg. 1.5 9 LO16MBL LO16MB<L> Pg. 1.5 10 GALEH GALE<H> Pg. 1.5 11 MA12 MA<12>H Pg. 1.5 12 XLATAD12 XLAT AD<12>H Pg. 1.5 13 XLATAD11 XLAT AD<11>H Pg. 1.5 14 MA11 MA<11>H Pg. 1.5 15 MA10 MA<10>H Pg. 1.5 16 XLATAD10 XLAT AD<10>H Pg. 1.5 17 XLATAD9 XLAT AD<9>H Pg. 1.5 18 MA9 MA<9>H Pg. 1.5	E7 8641 1 BIAKIL BIAKIL<L> Pg. 1.6 2 GND GND Pg. 1.6 3 RIAKIH RIAKI<H> Pg. 1.6 4 BDMGIL BDMGI<L> Pg. 1.6 5 GND GND Pg. 1.6 6 RDMGIH RDMGI<H> Pg. 1.6 7 TDIOI TDIO<L> Pg. 1.6 8 ENB8641L ENB 8641<L> Pg. 1.6 9 RDOOUTH RDOOUTH<H> Pg. 1.6 10 UUVRH UUVR<H> Pg. 1.6 11 BDOUTL BDOUT<L> Pg. 1.6 12 RDINH RDIN<H> Pg. 1.6 13 E25P2H E25P2<H> Pg. 1.6 14 BDIHL BDIH<L> Pg. 1.6	E8 F374 1 GND GND PG. 2.2 2 TOH T.O.<H> Pg. 1.5 3 UN1F37418P033 UNS1\$F374\$18P\$D\$3<3>H Pg. 1.5 4 ASYNCTOH ASYNC T.O.<H> Pg. 1.5 5 UN1F37418P033 UNS1\$F374\$18P\$D\$3<3>H Pg. 1.5 6 SDMRH SDMR<H> Pg. 1.5 7 UN1F37418P032 UNS1\$F374\$18P\$D\$3<2>H Pg. 1.5 8 RDMRH RDMR<H> Pg. 1.5 9 UN1F37418P032 UNS1\$F374\$18P\$D\$3<2>H Pg. 1.5 10 BUVCLKOH BUVCLKO<H> Pg. 1.5 11 UN1F37418P031 UNS1\$F374\$18P\$D\$3<1>H Pg. 1.5 12 RSACKH RSACK<H> Pg. 1.5 13 UN1F37418P031 UNS1\$F374\$18P\$D\$3<1>H Pg. 1.5 14 SSACKH SSACK<H> Pg. 1.5 15 SDMGIH SDMGI<H> Pg. 1.5 16 UN1F37418P030 UNS1\$F374\$18P\$D\$3<0>H Pg. 1.5 17 RDMGIH RDMGI<H> Pg. 1.5 18 UN1F37418P030 UNS1\$F374\$18P\$D\$3<0>H Pg. 1.5	E9 LS646 1 GND GND Pg. 1.5 2 GND GND Pg. 1.5 3 UUVRH UUVR<H> Pg. 1.5 4 EPR15 EPR<15>H Pg. 1.5 5 EPR14 EPR<14>H Pg. 1.5 6 EPR13 EPR<13>H Pg. 1.5 7 EPR12 EPR<12>H Pg. 1.5 8 EPR11 EPR<11>H Pg. 1.5 9 EPR10 EPR<10>H Pg. 1.5 10 EPR9 EPR<9>H Pg. 1.5 11 EPR8 EPR<8>H Pg. 1.5 12 XLATAD17 XLAT AD<17>H Pg. 1.5 13 XLATAD18 XLAT AD<18>H Pg. 1.5 14 XLATAD19 XLAT AD<19>H Pg. 1.5 15 XLATAD20 XLAT AD<20>H Pg. 1.5 16 XLATAD21 XLAT AD<21>H Pg. 1.5 17 XLATAD22 XLAT AD<22>H Pg. 1.5	19 XLATAD23 XLAT AD<23>H Pg. 1.5 20 VALIDH VALID<H> Pg. 1.5 21 ENBLS646L ENB LS646<L> Pg. 1.5 22 CSMAPL CS MAP<L> Pg. 1.5 23 XDMAQPEH XDMA QPE<H> Pg. 1.5	E10 LS646 1 GND GND Pg. 1.5 2 GND GND Pg. 1.5 3 UUVRH UUVR<H> Pg. 1.5 4 EPR7 EPR<7>H Pg. 1.5 5 EPR6 EPR<6>H Pg. 1.5 6 EPR5 EPR<5>H Pg. 1.5 7 EPR4 EPR<4>H Pg. 1.5 8 EPR3 EPR<3>H Pg. 1.5 9 EPR2 EPR<2>H Pg. 1.5 10 EPR1 EPR<1>H Pg. 1.5 11 EPR0 EPR<0>H Pg. 1.5 12 XLATAD9 XLAT AD<9>H Pg. 1.5 13 XLATAD10 XLAT AD<10>H Pg. 1.5 14 XLATAD11 XLAT AD<11>H Pg. 1.5 15 XLATAD12 XLAT AD<12>H Pg. 1.5 16 XLATAD13 XLAT AD<13>H Pg. 1.5 17 XLATAD14 XLAT AD<14>H Pg. 1.5 18 XLATAD15 XLAT AD<15>H Pg. 1.5 19 XLATAD16 XLAT AD<16>H Pg. 1.5 20 ENBLS646L ENB LS646<L> Pg. 1.5 21 CSMAPL CS MAP<L> Pg. 1.5 22 XDMAQPEH XDMA QPE<H> Pg. 1.5	E11 DC021 1 RCVBDALH RCV BDAL<H> Pg. 1.6 2 NC NC Pg. 1.6 3 BDALL16 BDAL<16>L Pg. 1.6 4 BDALL17 BDAL<17>L Pg. 1.6 5 BWTBTL BWTB<L> Pg. 1.6 6 BDAL1 BDAL<1>L Pg. 1.6 7 BDAL0 BDAL<0>L Pg. 1.6 8 BDALL9 BDAL<9>L Pg. 1.6 9 BDALL19 BDAL<19>L Pg. 1.6 10 XDAL18 XDAL<18>H Pg. 1.6 11 XDAL19 XDAL<19>H Pg. 1.6 12 XDAL0 XDAL<0>H Pg. 1.6 13 XDAL1 XDAL<1>H Pg. 1.6 14 XWTBTH XWTB<H> Pg. 1.6 15 XDAL17 XDAL<17>H Pg. 1.6 16 XDAL16 XDAL<16>H Pg. 1.6 17 NC NC Pg. 1.6 18 ENBBDALL ENB BDAL<L> Pg. 1.6	E12 F374 1 GND GND PG. 2.2 2 UN1F37425P053 UNS1\$F374\$25P\$D\$5<3>H Pg. 1.5 3 RSYNCH RSYN<H> Pg. 1.5 4 UN1F37425P063 UNS1\$F374\$25P\$D\$6<3>H Pg. 1.5 5 SSYNCH SSYN<H> Pg. 1.5 6 UN1F37425P052 UNS1\$F374\$25P\$D\$5<2>H Pg. 1.5 7 RDINH RDIN<H> Pg. 1.5 8 UN1F37425P052 UNS1\$F374\$25P\$D\$5<2>H Pg. 1.5 9 SDINH SDIN<H> Pg. 1.5 10 BUVCLKOH BUVCLKO<H> Pg. 1.5 11 SDOOUTH SDOOUT<H> Pg. 1.5 12 UN1F37425P061 UNS1\$F374\$25P\$D\$6<1>H Pg. 1.5 13 RDOOUTH RDOOUTH<H> Pg. 1.5 14 UN1F37425P061 UNS1\$F374\$25P\$D\$6<1>H Pg. 1.5 15 UN1F37425P060 UNS1\$F374\$25P\$D\$6<0>H Pg. 1.5 16 UN1F37425P060 UNS1\$F374\$25P\$D\$6<0>H Pg. 1.5 17 RRPLYH RRPLY<H> Pg. 1.5 18 UN1F37425P060 UNS1\$F374\$25P\$D\$6<0>H Pg. 1.5 19 SRPLYH SRPLY<H> Pg. 1.5
---------------------------------	---------------------------------------	---------------------------------------	---------------------------------------	---------------------------------------	-----------------------------------------	-------------------------------------	-------------------------------------	-----------------------------------------	-------------------------------------	-----------------------------------------	-----------------------------------------	---------------------------------	-------------------------------------	----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-----------------------------------------------------------------------------------------------------------------------------------------------------------------------	-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

E28	LS244 (CONT.)		
1	CONF3	CONF<3>L	Pg. 1.10
2	J2P5	J2P5(L)	Pg. 1.10
3	BRSL0	BR5<0>L	Pg. 1.10
4	J2P4L	J2P4(L)	Pg. 1.10
5	BRSL1	BR5<1>L	Pg. 1.10
6	BRSL2	BR5<2>L	Pg. 1.10
7	J2P14L	J2P14(L)	Pg. 1.10
8	BDGCDL0	BDG CD<0>L	Pg. 1.10
9	SG4L	SG4(L)	Pg. 1.10

E29	LM211		
1	GND	GND	Pg. 1.8
2	V12REFH	V1.2REF<H>	Pg. 1.8
3	BTVREFH	BTVREF<H>	Pg. 1.8
4	GND	GND	Pg. 1.8
5	UN1LM2119PB10	UN<1>LM211<9>PS<10>H	Pg. 1.8
6	UN1LM2119PB10	UN<1>LM211<9>PS<10>H	Pg. 1.8
7	BTRYOKL	BTRY OK<L>	Pg. 1.8
8	A50V	+5.0V	Pg. 1.8

E30	DC021		
1	RCVBDALH	RCV BDAL<H>	Pg. 1.6
2	BDALL20	BDAL<20>L	Pg. 1.6
3	BDALL21	BDAL<21>L	Pg. 1.6
4	BDALL2	BDAL<2>L	Pg. 1.6
5	BDALL3	BDAL<3>L	Pg. 1.6
6	BDALL4	BDAL<4>L	Pg. 1.6
7	BDALL5	BDAL<5>L	Pg. 1.6
8	BDALL6	BDAL<6>L	Pg. 1.6
9	BDALL7	BDAL<7>L	Pg. 1.6
10	BDALL8	BDAL<8>L	Pg. 1.6
11	BDALL9	BDAL<9>L	Pg. 1.6
12	BDALL10	BDAL<10>L	Pg. 1.6
13	BDALL11	BDAL<11>L	Pg. 1.6
14	BDALL12	BDAL<12>L	Pg. 1.6
15	BDALL13	BDAL<13>L	Pg. 1.6
16	BDALL14	BDAL<14>L	Pg. 1.6
17	BDALL15	BDAL<15>L	Pg. 1.6
18	BDALL16	BDAL<16>L	Pg. 1.6
19	ENBBDALL	ENB BDAL<L>	Pg. 1.6

E31	F74		
1	DECODEH	DECODE<H>	Pg. 2.1.1
2	E47P11H	E47P11<H>	Pg. 2.1.1
3	BUVCLKOH	BUVCLK<O>H	Pg. 2.1.1
4	A3VA	+3VA H	Pg. 2.1.1
5	NC	NC H	Pg. 2.1.1
6	RASDECODEL	RAS DECODE<L>	Pg. 2.1.1
7	SELCOH	SELCO<H>	Pg. 2.1.1
8	SELCOLL	SELCO<L>	Pg. 2.1.1
9	E38P10L	E38P10<L>	Pg. 2.1.1
10	BUVCLKOH	BUVCLK<O>H	Pg. 2.1.1
11	UVCYCL	UVCY<L>	Pg. 2.1.1
12	A3VA	+3VA H	Pg. 2.1.1
13			

E32	F04		
1	REFMAL	REF->MA<L>	Pg. 2.1.1
2	E59P13H	E59P13<H>	Pg. 2.1.1
3	RSYNCH	RSYN<H>	Pg. 1.6
4	RSYNCL	RSYN<L>	Pg. 1.6
5	UVRESETL	UVRESE<L>	Pg. 1.7
6	BUVRESETH	BUVRESE<H>	Pg. 1.7
7	UVVRH	UVVR<H>	Pg. 1.1
8	UVVRL	UVVR<L>	Pg. 1.1
9	BUVASL	BUVAS<L>	Pg. 1.1
10	BUVASL	BUVAS<L>	Pg. 1.1
11	BUVASL	BUVAS<L>	Pg. 1.1
12	BUVASL	BUVAS<L>	Pg. 1.1
13	UVASL	UVAS<L>	Pg. 1.1

E33	825167		
1	BUVCLKOH	BUVCLK<O>H	Pg. 2.1.1
2	VALIDH	VALID<H>	Pg. 2.1.1
3	XWTBTH	XWTBT<H>	Pg. 2.1.1
4	R357H	R357<H>	Pg. 2.1.1
5	SDOUTH	SDOUT<H>	Pg. 2.1.1
6	SDINH	SDIN<H>	Pg. 2.1.1

7	SSYNCH	SSYN<H>	Pg. 2.1.1
8	DC021RCVH	DC021RCV<H>	Pg. 2.1.1
9	NC	NC H	Pg. 2.1.1
10	GALEH	GALE<H>	Pg. 2.1.1
11	INCCTRH	INC CTR<H>	Pg. 2.1.1
12	ARMREPLYL	ARM REPLY<L>	Pg. 2.1.1
13	DRQL	DRQ<L>	Pg. 2.1.1
14	B_VRESETH	BUVRESE<H>	Pg. 2.1.1
15	DMAMAL	DMA->MA<L>	Pg. 2.1.1
16	SELCOH	SELCO<H>	Pg. 2.1.1
17	BDY16L	BDY16<L>	Pg. 2.1.1
18	ODDWDH	ODD WD<H>	Pg. 2.1.1
19	SELDBL	SEL DB<L>	Pg. 2.1.1
20	UVRH	UVR<H>	Pg. 2.1.1
21	QMEMENBL	QMEMEN<L>	Pg. 2.1.1
22			
23			

E34	F74		
1	A3VA	+3VA H	Pg. 2.1.1
2	E65P11L	E65P11<L>	Pg. 2.1.1
3	SELCOLL	SELCO<L>	Pg. 2.1.1
4	E47P8L	E47P8<L>	Pg. 2.1.1
5	LPERRL	LPERR<L>	Pg. 2.1.1
6	NC	NC H	Pg. 2.1.1
7	NC	NC H	Pg. 2.1.1
8	NC	NC H	Pg. 2.1.1
9	FSTRDYH	FSTRDY<H>	Pg. 2.1.1
10	A3VA	+3VA H	Pg. 2.1.1
11	BUVCLKOH	BUVCLK<O>H	Pg. 2.1.1
12	E38P10L	E38P10<L>	Pg. 2.1.1
13	DMAMAL	DMA->MA<L>	Pg. 2.1.1

E35	LS26		
1	BDCOKH	BDCOK<H>	Pg. 1.8
2	CSTOYH	CS TOY<H>	Pg. 1.8
3	E35P3L	E35P3<L>	Pg. 1.8
4	BDCOKH	BDCOK<H>	Pg. 1.8
5	CLRPSH	CLR PS<H>	Pg. 1.8
6	E35P6L	E35P6<L>	Pg. 1.8
7	E35P8L	E35P8<L>	Pg. 1.8
8	TINITH	TINIT<H>	Pg. 1.8
9	TINITH	TINIT<H>	Pg. 1.8
10	DOKH	DOK<H>	Pg. 1.7
11	RDCOKL	RDCOK<L>	Pg. 1.7
12	RDCOKL	RDCOK<L>	Pg. 1.7
13	RDCOKL	RDCOK<L>	Pg. 1.7

E36	DC021		
1	RCVBDALH	RCV BDAL<H>	Pg. 1.6
2	BDALL15	BDAL<15>L	Pg. 1.6
3	BDALL14	BDAL<14>L	Pg. 1.6
4	BDALL13	BDAL<13>L	Pg. 1.6
5	BDALL12	BDAL<12>L	Pg. 1.6
6	BDALL11	BDAL<11>L	Pg. 1.6
7	BDALL10	BDAL<10>L	Pg. 1.6
8	BDALL9	BDAL<9>L	Pg. 1.6
9	BDALL8	BDAL<8>L	Pg. 1.6
10	BDALL7	BDAL<7>L	Pg. 1.6
11	BDALL6	BDAL<6>L	Pg. 1.6
12	BDALL5	BDAL<5>L	Pg. 1.6
13	BDALL4	BDAL<4>L	Pg. 1.6
14	BDALL3	BDAL<3>L	Pg. 1.6
15	BDALL2	BDAL<2>L	Pg. 1.6
16	BDALL1	BDAL<1>L	Pg. 1.6
17	BDALL0	BDAL<0>L	Pg. 1.6
18	ENBBDALL	ENB BDAL<L>	Pg. 1.6
19			

E37	F32		
1	LO16MBL	LO16MB<L>	Pg. 2.1.1
2	RASDECODEL	RAS DECODE<L>	Pg. 2.1.1
3	UVCYCL	UVCY<L>	Pg. 2.1.1
4	UVCLKOH	UVCLK<O>H	Pg. 1.1
5	R1E37PDL	R1E37PD<L>	Pg. 1.1
6	BUVCLKOH	BUVCLK<O>H	Pg. 1.1
7	E37P11H	E37P11<H>	Pg. 1.6
8	TIAKOH	TIAK<O>H	Pg. 1.6
9	RIAKIH	RIAKI<H>	Pg. 1.6

E38	F02		
1	TS1	TS<1>L	Pg. 2.1.1
2	TS1	TS<1>H	Pg. 2.1.1
3	TS1	TS<1>H	Pg. 2.1.1
4	E100P14H	E100P14<H>	Pg. 2.1.1
5	LO16MBL	LO16MB<L>	Pg. 2.1.1
6	SG1L	SG1<L>	Pg. 2.1.1
7	LOCALNXMH	LOCAL NXM<H>	Pg. 2.1.1
8	STARTCYCL	START CYC<L>	Pg. 2.1.1
9	E38P10L	E38P10<L>	Pg. 2.1.1
10	READYH	READY<H>	Pg. 1.1
11	FSTRDYH	FSTRDY<H>	Pg. 1.1
12	UVRDYL	UVRDY<L>	Pg. 1.1
13			

E39	825167		
1	BUVCLKOH	BUVCLK<O>H	Pg. 2.1.1
2	UVCYCCDL1	UVCYCCD<1>L	Pg. 2.1.1
3	UVVRH	UVVR<H>	Pg. 2.1.1
4	DONECL	DONE<L>	Pg. 2.1.1
5	UVERRL	UVERR<L>	Pg. 2.1.1
6	TS0	TS<0>H	Pg. 2.1.1
7	TS1	TS<1>H	Pg. 2.1.1
8	BUVASH	BUVAS<H>	Pg. 2.1.1
9	MAPDISABLEH	MAP DISABLE<H>	Pg. 2.1.1
10	EPDSH	EPDS<H>	Pg. 2.1.1
11	EPASL	EPAS<L>	Pg. 2.1.1
12	HIROMDLATCHL	HIROMDLATCH<L>	Pg. 2.1.1
13	EPADENBL	EPAD ENB<L>	Pg. 2.1.1
14	EPREADYL	EPREADY<L>	Pg. 2.1.1
15	BUVRESETH	BUVRESE<H>	Pg. 2.1.1
16	UVDMAL	UVDM->MA<L>	Pg. 2.1.1
17	ARMRDYERRL	ARMRDYERR<L>	Pg. 2.1.1
18	CSTOYH	CS TOY<H>	Pg. 2.1.1
19	CSPROML	CS PROM<L>	Pg. 2.1.1
20	CSMAPL	CS MAP<L>	Pg. 2.1.1
21	CSMAPEMEARH	CS MAP;EMEAR<H>	Pg. 2.1.1
22	UVCYCCDL0	UVCYCCD<0>L	Pg. 2.1.1
23			

E40	16L8A		
1	RPOKL	RPOK<L>	Pg. 1.4
2	BTRYOKL	BTRY OK<L>	Pg. 1.4
3	CSMAPEMEARH	CS MAP;EMEAR<H>	Pg. 1.4
4	EPASL	EPAS<L>	Pg. 1.4
5	EPDSH	EPDS<H>	Pg. 1.4
6	UVVRH	UVVR<H>	Pg. 1.4
7	DONECL	DONE<L>	Pg. 1.4
8	GALEH	GALE<H>	Pg. 1.4
9	GRANTL	GRANT<L>	Pg. 1.4
10	SRPLYH	SRPLY<H>	Pg. 1.4
11	CLRPSH	CLR PS<H>	Pg. 1.4
12	ENBLS646L	ENB LS646<L>	Pg. 1.4
13	WRMAPL	WR MAP<L>	Pg. 1.4
14	ENBBDALL	ENB BDAL<L>	Pg. 1.4
15	RDINH	RDIN<H>	Pg. 1.4
16	DC021RCVH	DC021RCV<H>	Pg. 1.4
17	TDIOL	TDIO<L>	Pg. 1.4
18	RCVBDALH	RCV BDAL<H>	Pg. 1.4
19			

E41	LS367		
1	SG4L	SG4<L>	Pg. 1.10
2	BDR3	BDR<3>L	Pg. 1.10
3	J2P11L	J2P11<L>	Pg. 1.10
4	BDR2	BDR<2>L	Pg. 1.10
5	J2P9L	J2P9<L>	Pg. 1.10
6	BDR1	BDR<1>L	Pg. 1.10
7	J2P8L	J2P8<L>	Pg. 1.10
8	J2P7L	J2P7<L>	Pg. 1.10
9	BDR0	BDR<0>L	Pg. 1.10
10	E41P11L	E41P11<L>	Pg. 1.10
11	RDCOKL	RDCOK<L>	Pg. 1.10
12	HLTENBL	HLT ENB<L>	Pg. 1.10
13	J2P15L	J2P15<L>	Pg. 1.10
14	SG4L	SG4<L>	Pg. 1.10
15			

E42	DC337		
1	UVDA8	UVDA<8>H	Pg. 1.1
2	UVDA9	UVDA<9>H	Pg. 1.1
3	UVDA10	UVDA<10>H	Pg. 1.1
4	UVDA11	UVDA<11>H	Pg. 1.1
5	UVDA12	UVDA<12>H	Pg. 1.1
6	UVDA13	UVDA<13>H	Pg. 1.1
7	UVDA14	UVDA<14>H	Pg. 1.1
8	UVDA15	UVDA<15>H	Pg. 1.1
9	CLK25H	CLK25<H>	Pg. 1.1
10	UVCLKOH	UVCLK<O>H	Pg. 1.1
11	UVRESETL	UVRESE<L>	Pg. 1.1
12	UVDA16	UVDA<16>H	Pg. 1.1
13	UVDA17	UVDA<17>H	Pg. 1.1
14	UVDA18	UVDA<18>H	Pg. 1.1
15	UVDA19	UVDA<19>H	Pg. 1.1
16	UVDA20	UVDA<20>H	Pg. 1.1
17	UVDA21	UVDA<21>H	Pg. 1.1
18	UVDA22	UVDA<22>H	Pg. 1.1
19	UVDA23	UVDA<23>H	Pg. 1.1
20	UVDA24	UVDA<24>H	Pg. 1.1
21	UVDA25	UVDA<25>H	Pg. 1.1
22	UVDA26	UVDA<26>H	Pg. 1.1
23	UVDA27	UVDA<27>H	Pg. 1.1
24	UVDA28	UVDA<28>H	Pg. 1.1
25	UVDA29	UVDA<29>H	Pg. 1.1
26	UVDA30	UVDA<30>H	Pg. 1.1
27	UVDA31	UVDA<31>H	Pg. 1.1
28	UVDA32	UVDA<32>H	Pg. 1.1
29	UVDA33	UVDA<33>H	Pg. 1.1
30	UVDA34	UVDA<34>H	Pg. 1.1
31	UVDA35	UVDA<35>H	Pg. 1.1
32	UVDA36	UVDA<36>H	Pg. 1.1
33	UVDA37	UVDA<37>H	Pg. 1.1
34	UVDA38	UVDA<38>H	Pg. 1.1
35	UVDA39	UVDA<39>H	Pg. 1.1
36	UVDA40	UVDA<40>H	Pg. 1.1
37	UVDA41	UVDA<41>H	Pg. 1.1
38	UVDA42	UVDA<42>H	Pg. 1.1
39	UVDA43	UVDA<43>H	Pg. 1.1
40	UVDA44	UVDA<44>H	Pg. 1.1
41	UVDA45	UVDA<45>H	Pg. 1.1
42	UVDA46	UVDA<46>H	Pg. 1.1
43	UVDA47	UVDA<47>H	Pg. 1.1
44	UVDA48	UVDA<48>H	Pg. 1.1
45	UVDA49	UVDA<49>H	Pg. 1.1
46	UVDA50	UVDA<50>H	Pg. 1.1
47	UVDA51	UVDA<51>H	Pg. 1.1
48	UVDA52	UVDA<52>H	Pg. 1.1
49	GND	GND	Pg. 1.1
50	UVDA0	UVDA<0>H	

E43	DC333 (CONT.)		
35	UVDAL29	UVDAL<29>H	Pg. 1.1
36	UVDAL28	UVDAL<28>H	Pg. 1.1
37	UVDAL27	UVDAL<27>H	Pg. 1.1
38	UVDAL26	UVDAL<26>H	Pg. 1.1
39	UVDAL25	UVDAL<25>H	Pg. 1.1
40	UVDAL24	UVDAL<24>H	Pg. 1.1
41	UVDAL23	UVDAL<23>H	Pg. 1.1
42	UVDAL22	UVDAL<22>H	Pg. 1.1
43	UVDAL21	UVDAL<21>H	Pg. 1.1
44	UVDAL20	UVDAL<20>H	Pg. 1.1
45	UVDAL19	UVDAL<19>H	Pg. 1.1
46	UVDAL18	UVDAL<18>H	Pg. 1.1
47	UVDAL17	UVDAL<17>H	Pg. 1.1
48	UVDAL16	UVDAL<16>H	Pg. 1.1
49	UVDAL15	UVDAL<15>H	Pg. 1.1
50	UVDAL14	UVDAL<14>H	Pg. 1.1
51	UVDAL13	UVDAL<13>H	Pg. 1.1
52	UVDAL12	UVDAL<12>H	Pg. 1.1
53	UVDAL11	UVDAL<11>H	Pg. 1.1
54	UVDAL10	UVDAL<10>H	Pg. 1.1
55	UVDAL9	UVDAL<9>H	Pg. 1.1
56	UVDAL8	UVDAL<8>H	Pg. 1.1
57	UVDAL7	UVDAL<7>H	Pg. 1.1
58	UVDAL6	UVDAL<6>H	Pg. 1.1
59	UVDAL5	UVDAL<5>H	Pg. 1.1
60	UVDAL4	UVDAL<4>H	Pg. 1.1
61	UVDAL3	UVDAL<3>H	Pg. 1.1
62	UVDAL2	UVDAL<2>H	Pg. 1.1
63	UVDAL1	UVDAL<1>H	Pg. 1.1
64	UVDAL0	UVDAL<0>H	Pg. 1.1

65	GATEARRAY1		
66	UVDAL31	UVDAL<31>H	Pg. 1.7
67	UVDAL30	UVDAL<30>H	Pg. 1.7
68	UVDAL29	UVDAL<29>H	Pg. 1.7
69	UVDAL28	UVDAL<28>H	Pg. 1.7
70	UVDAL27	UVDAL<27>H	Pg. 1.7
71	UVDAL26	UVDAL<26>H	Pg. 1.7
72	UVDAL25	UVDAL<25>H	Pg. 1.7
73	UVDAL24	UVDAL<24>H	Pg. 1.7
74	UVDAL23	UVDAL<23>H	Pg. 1.7
75	UVDAL22	UVDAL<22>H	Pg. 1.7
76	UVDAL21	UVDAL<21>H	Pg. 1.7
77	UVDAL20	UVDAL<20>H	Pg. 1.7
78	UVDAL19	UVDAL<19>H	Pg. 1.7
79	UVDAL18	UVDAL<18>H	Pg. 1.7
80	UVDAL17	UVDAL<17>H	Pg. 1.7
81	UVDAL16	UVDAL<16>H	Pg. 1.7
82	UVDAL15	UVDAL<15>H	Pg. 1.7
83	UVDAL14	UVDAL<14>H	Pg. 1.7
84	UVDAL13	UVDAL<13>H	Pg. 1.7
85	UVDAL12	UVDAL<12>H	Pg. 1.7
86	UVDAL11	UVDAL<11>H	Pg. 1.7
87	UVDAL10	UVDAL<10>H	Pg. 1.7
88	UVDAL9	UVDAL<9>H	Pg. 1.7
89	UVDAL8	UVDAL<8>H	Pg. 1.7
90	UVDAL7	UVDAL<7>H	Pg. 1.7
91	UVDAL6	UVDAL<6>H	Pg. 1.7
92	UVDAL5	UVDAL<5>H	Pg. 1.7
93	UVDAL4	UVDAL<4>H	Pg. 1.7
94	UVDAL3	UVDAL<3>H	Pg. 1.7
95	UVDAL2	UVDAL<2>H	Pg. 1.7
96	UVDAL1	UVDAL<1>H	Pg. 1.7
97	UVDAL0	UVDAL<0>H	Pg. 1.7

E45	GATEARRAY2		
98	MAPAD12	MAP AD<12>H	Pg. 1.7
99	CLK6144KHZ	CLK 614.4KHZ(H)	Pg. 1.7
100	RDCOUT	RDCOUT(H)	Pg. 1.7
101	TRPLX	TRPLX(H)	Pg. 1.7
102	MAPAD11	MAP AD<11>H	Pg. 1.7
103	TDIOL	TDIOL(H)	Pg. 1.7
104	RSYNCH	RSYNCH(H)	Pg. 1.7
105	RDCOKL	RDCOKL(H)	Pg. 1.7
106	RDINH	RDINH(H)	Pg. 1.7
107	XDAL1	XDAL<1>H	Pg. 1.7
108	XDAL0	XDAL<0>H	Pg. 1.7
109	TREFH	TREFH(H)	Pg. 1.7
110	XDAL2	XDAL<2>H	Pg. 1.7
111	XDAL3	XDAL<3>H	Pg. 1.7
112	XDAL4	XDAL<4>H	Pg. 1.7
113	XDAL5	XDAL<5>H	Pg. 1.7
114	XDAL6	XDAL<6>H	Pg. 1.7
115	XDAL7	XDAL<7>H	Pg. 1.7
116	XDAL8	XDAL<8>H	Pg. 1.7
117	XDAL9	XDAL<9>H	Pg. 1.7
118	XDAL10	XDAL<10>H	Pg. 1.7
119	XDAL11	XDAL<11>H	Pg. 1.7
120	XDAL12	XDAL<12>H	Pg. 1.7
121	XDAL13	XDAL<13>H	Pg. 1.7
122	XDAL14	XDAL<14>H	Pg. 1.7
123	XDAL15	XDAL<15>H	Pg. 1.7
124	XDAL16	XDAL<16>H	Pg. 1.7
125	XDAL17	XDAL<17>H	Pg. 1.7
126	XDAL18	XDAL<18>H	Pg. 1.7
127	XDAL19	XDAL<19>H	Pg. 1.7
128	XDAL20	XDAL<20>H	Pg. 1.7
129	XDAL21	XDAL<21>H	Pg. 1.7
130	XDAL22	XDAL<22>H	Pg. 1.7
131	XDAL23	XDAL<23>H	Pg. 1.7
132	XDAL24	XDAL<24>H	Pg. 1.7
133	XDAL25	XDAL<25>H	Pg. 1.7
134	XDAL26	XDAL<26>H	Pg. 1.7
135	XDAL27	XDAL<27>H	Pg. 1.7
136	XDAL28	XDAL<28>H	Pg. 1.7
137	XDAL29	XDAL<29>H	Pg. 1.7
138	XDAL30	XDAL<30>H	Pg. 1.7
139	XDAL31	XDAL<31>H	Pg. 1.7
140	XDAL32	XDAL<32>H	Pg. 1.7
141	XDAL33	XDAL<33>H	Pg. 1.7
142	XDAL34	XDAL<34>H	Pg. 1.7
143	XDAL35	XDAL<35>H	Pg. 1.7
144	XDAL36	XDAL<36>H	Pg. 1.7
145	XDAL37	XDAL<37>H	Pg. 1.7
146	XDAL38	XDAL<38>H	Pg. 1.7
147	XDAL39	XDAL<39>H	Pg. 1.7
148	XDAL40	XDAL<40>H	Pg. 1.7
149	XDAL41	XDAL<41>H	Pg. 1.7
150	XDAL42	XDAL<42>H	Pg. 1.7
151	XDAL43	XDAL<43>H	Pg. 1.7
152	XDAL44	XDAL<44>H	Pg. 1.7
153	XDAL45	XDAL<45>H	Pg. 1.7
154	XDAL46	XDAL<46>H	Pg. 1.7
155	XDAL47	XDAL<47>H	Pg. 1.7
156	XDAL48	XDAL<48>H	Pg. 1.7
157	XDAL49	XDAL<49>H	Pg. 1.7
158	XDAL50	XDAL<50>H	Pg. 1.7
159	XDAL51	XDAL<51>H	Pg. 1.7
160	XDAL52	XDAL<52>H	Pg. 1.7
161	XDAL53	XDAL<53>H	Pg. 1.7
162	XDAL54	XDAL<54>H	Pg. 1.7
163	XDAL55	XDAL<55>H	Pg. 1.7
164	XDAL56	XDAL<56>H	Pg. 1.7
165	XDAL57	XDAL<57>H	Pg. 1.7
166	XDAL58	XDAL<58>H	Pg. 1.7
167	XDAL59	XDAL<59>H	Pg. 1.7
168	XDAL60	XDAL<60>H	Pg. 1.7
169	XDAL61	XDAL<61>H	Pg. 1.7
170	XDAL62	XDAL<62>H	Pg. 1.7
171	XDAL63	XDAL<63>H	Pg. 1.7
172	XDAL64	XDAL<64>H	Pg. 1.7
173	XDAL65	XDAL<65>H	Pg. 1.7
174	XDAL66	XDAL<66>H	Pg. 1.7
175	XDAL67	XDAL<67>H	Pg. 1.7
176	XDAL68	XDAL<68>H	Pg. 1.7
177	XDAL69	XDAL<69>H	Pg. 1.7
178	XDAL70	XDAL<70>H	Pg. 1.7
179	XDAL71	XDAL<71>H	Pg. 1.7
180	XDAL72	XDAL<72>H	Pg. 1.7
181	XDAL73	XDAL<73>H	Pg. 1.7
182	XDAL74	XDAL<74>H	Pg. 1.7
183	XDAL75	XDAL<75>H	Pg. 1.7
184	XDAL76	XDAL<76>H	Pg. 1.7
185	XDAL77	XDAL<77>H	Pg. 1.7
186	XDAL78	XDAL<78>H	Pg. 1.7
187	XDAL79	XDAL<79>H	Pg. 1.7
188	XDAL80	XDAL<80>H	Pg. 1.7
189	XDAL81	XDAL<81>H	Pg. 1.7
190	XDAL82	XDAL<82>H	Pg. 1.7
191	XDAL83	XDAL<83>H	Pg. 1.7
192	XDAL84	XDAL<84>H	Pg. 1.7
193	XDAL85	XDAL<85>H	Pg. 1.7
194	XDAL86	XDAL<86>H	Pg. 1.7
195	XDAL87	XDAL<87>H	Pg. 1.7
196	XDAL88	XDAL<88>H	Pg. 1.7
197	XDAL89	XDAL<89>H	Pg. 1.7
198	XDAL90	XDAL<90>H	Pg. 1.7
199	XDAL91	XDAL<91>H	Pg. 1.7
200	XDAL92	XDAL<92>H	Pg. 1.7
201	XDAL93	XDAL<93>H	Pg. 1.7
202	XDAL94	XDAL<94>H	Pg. 1.7
203	XDAL95	XDAL<95>H	Pg. 1.7
204	XDAL96	XDAL<96>H	Pg. 1.7
205	XDAL97	XDAL<97>H	Pg. 1.7
206	XDAL98	XDAL<98>H	Pg. 1.7
207	XDAL99	XDAL<99>H	Pg. 1.7
208	XDAL100	XDAL<100>H	Pg. 1.7

E46	F373		
1	UVDALMAL	UVDAL->MAL	Pg. 1.1
2	MA16	MA<16>H	Pg. 1.1
3	UVDAL16	UVDAL<16>H	Pg. 1.1
4	UVDAL23	UVDAL<23>H	Pg. 1.1
5	MA23	MA<23>H	Pg. 1.1
6	MA20	MA<20>H	Pg. 1.1
7	UVDAL20	UVDAL<20>H	Pg. 1.1
8	UVDAL19	UVDAL<19>H	Pg. 1.1
9	MA19	MA<19>H	Pg. 1.1
10	BUVASL	BUVASL	Pg. 1.1
11	MA6	MA<6>H	Pg. 1.1
12	UVDAL6	UVDAL<6>H	Pg. 1.1
13	UVDAL4	UVDAL<4>H	Pg. 1.1
14	MA4	MA<4>H	Pg. 1.1
15	MA22	MA<22>H	Pg. 1.1
16	UVDAL22	UVDAL<22>H	Pg. 1.1
17	UVDAL17	UVDAL<17>H	Pg. 1.1
18	MA17	MA<17>H	Pg. 1.1
19			

REVISIONS

DATE: 8-19-84
 DATE: 8-19-85

SIZE: 116 PERL
 SIZE: 1016 PERL

NUMBER: M7478-2-2

REV: A

0-2-54724 CC: C
 3003 1215

Item No.	Part No.	Description	Quantity	Unit	Notes
E47	F20	R9E47PUH	1	Pg.	1.1.1.1
1		CLK6144KH2L	1	Pg.	1.1.1.1
2		CLK6144KH2H	1	Pg.	1.1.1.1
3		SY5CLKH	1	Pg.	1.1.1.1
4		R23E47PUH	1	Pg.	1.1.1.1
5		CLK25H	1	Pg.	1.1.1.1
6		E47PBL	1	Pg.	1.1.1.1
7		TS0	1	Pg.	1.1.1.1
8		TS1	1	Pg.	1.1.1.1
9		E47P11H	1	Pg.	1.1.1.1
10		UVASL	1	Pg.	1.1.1.1
11		DMAMAL	1	Pg.	1.1.1.1
12					
13					
E48	256K	BMAA8	1	Pg.	1.3
1		LRO31	1	Pg.	1.3
2		BMSWTL0	1	Pg.	1.3
3		RASL81	1	Pg.	1.3
4		BMAA0	1	Pg.	1.3
5		BMAA2	1	Pg.	1.3
6		BMAA1	1	Pg.	1.3
7		BMAA7	1	Pg.	1.3
8		BMAA5	1	Pg.	1.3
9		BMAA4	1	Pg.	1.3
10		BMAA3	1	Pg.	1.3
11		BMAA6	1	Pg.	1.3
12		LRO31	1	Pg.	1.3
13		CASL3	1	Pg.	1.3
E49	256K	BMAA8	1	Pg.	1.3
1		LRO23	1	Pg.	1.3
2		BMSWTL0	1	Pg.	1.3
3		RASL81	1	Pg.	1.3
4		BMAA0	1	Pg.	1.3
5		BMAA2	1	Pg.	1.3
6		BMAA1	1	Pg.	1.3
7		BMAA7	1	Pg.	1.3
8		BMAA5	1	Pg.	1.3
9		BMAA4	1	Pg.	1.3
10		BMAA3	1	Pg.	1.3
11		BMAA6	1	Pg.	1.3
12		LRO23	1	Pg.	1.3
13		CASL2	1	Pg.	1.3
E50	256K	BMAA8	1	Pg.	1.3
1		LRO15	1	Pg.	1.3
2		BMSWTL0	1	Pg.	1.3
3		RASL80	1	Pg.	1.3
4		BMAA0	1	Pg.	1.3
5		BMAA2	1	Pg.	1.3
6		BMAA1	1	Pg.	1.3
7		BMAA7	1	Pg.	1.3
8		BMAA5	1	Pg.	1.3
9		BMAA4	1	Pg.	1.3
10		BMAA3	1	Pg.	1.3
11		BMAA6	1	Pg.	1.3
12		LRO15	1	Pg.	1.3
13		CASL1	1	Pg.	1.3
E51	256K	BMAA8	1	Pg.	1.3
1		LRO7	1	Pg.	1.3
2		BMSWTL0	1	Pg.	1.3
3		RASL80	1	Pg.	1.3
4		BMAA0	1	Pg.	1.3
5		BMAA2	1	Pg.	1.3
6		BMAA1	1	Pg.	1.3
7		BMAA7	1	Pg.	1.3
8		BMAA5	1	Pg.	1.3
9		BMAA4	1	Pg.	1.3
10		BMAA3	1	Pg.	1.3
11		BMAA6	1	Pg.	1.3
12		LRO7	1	Pg.	1.3
13		CASL0	1	Pg.	1.3
E52	F245	UVLRH	1	Pg.	1.1.1.1
1		UVDAL20	1	Pg.	1.1.1.1
2		UVDAL17	1	Pg.	1.1.1.1
3		UVDA19	1	Pg.	1.1.1.1
4		UVDAL30	1	Pg.	1.1.1.1
5		UVDAL16	1	Pg.	1.1.1.1
6		UVDAL23	1	Pg.	1.1.1.1
7		UVDAL22	1	Pg.	1.1.1.1
8		UVDAL31	1	Pg.	1.1.1.1
9		MD31	1	Pg.	1.1.1.1
10		MD22	1	Pg.	1.1.1.1
11		MD23	1	Pg.	1.1.1.1
12		MD16	1	Pg.	1.1.1.1
13		MD30	1	Pg.	1.1.1.1
14		MD19	1	Pg.	1.1.1.1
15		MD17	1	Pg.	1.1.1.1
16		MD20	1	Pg.	1.1.1.1
17		ARMUVDPA	1	Pg.	1.1.1.1
18					
19					
E53	F373	UVDMAL	1	Pg.	1.1.1.1
1		UVDAL21	1	Pg.	1.1.1.1
2		MA21	1	Pg.	1.1.1.1
3		MA18	1	Pg.	1.1.1.1
4		UVDAL18	1	Pg.	1.1.1.1
5		UVCL5	1	Pg.	1.1.1.1
6		MA15	1	Pg.	1.1.1.1
7		BUVASL	1	Pg.	1.1.1.1
8		MA14	1	Pg.	1.1.1.1
9		UVDAL14	1	Pg.	1.1.1.1
10		UVDAL8	1	Pg.	1.1.1.1
11		MA9	1	Pg.	1.1.1.1
12		MA7	1	Pg.	1.1.1.1
13		UVDAL7	1	Pg.	1.1.1.1
14		UVDAL9	1	Pg.	1.1.1.1
15		MA9	1	Pg.	1.1.1.1
E54	256K	BMAA8	1	Pg.	1.3
1		LRO30	1	Pg.	1.3
2		BMSWTL0	1	Pg.	1.3
3		RASL81	1	Pg.	1.3
4		BMAA0	1	Pg.	1.3
5		BMAA2	1	Pg.	1.3
6		BMAA1	1	Pg.	1.3
7		BMAA7	1	Pg.	1.3
8		BMAA5	1	Pg.	1.3
9		BMAA4	1	Pg.	1.3
10		BMAA3	1	Pg.	1.3
11		BMAA6	1	Pg.	1.3
12		LRO30	1	Pg.	1.3
13		CASL3	1	Pg.	1.3
E55	256K	BMAA8	1	Pg.	1.3
1		LRO22	1	Pg.	1.3
2		BMSWTL0	1	Pg.	1.3
3		RASL81	1	Pg.	1.3
4		BMAA0	1	Pg.	1.3
5		BMAA2	1	Pg.	1.3
6		BMAA1	1	Pg.	1.3
7		BMAA7	1	Pg.	1.3
8		BMAA5	1	Pg.	1.3
9		BMAA4	1	Pg.	1.3
10		BMAA3	1	Pg.	1.3
11		BMAA6	1	Pg.	1.3
12		LRO22	1	Pg.	1.3
13		CASL2	1	Pg.	1.3
E56	256K	BMAA8	1	Pg.	1.3
1		LRO14	1	Pg.	1.3
2		BMSWTL0	1	Pg.	1.3
3		RASL80	1	Pg.	1.3
4		BMAA0	1	Pg.	1.3
5		BMAA2	1	Pg.	1.3
6		BMAA1	1	Pg.	1.3
7		BMAA7	1	Pg.	1.3
8		BMAA5	1	Pg.	1.3
9		BMAA4	1	Pg.	1.3
10		BMAA3	1	Pg.	1.3
11		BMAA6	1	Pg.	1.3
12		LRO14	1	Pg.	1.3
13		CASL1	1	Pg.	1.3
E57	256K	BMAA8	1	Pg.	1.3
1		LRO6	1	Pg.	1.3
2		BMSWTL0	1	Pg.	1.3
3		RASL80	1	Pg.	1.3
4		BMAA0	1	Pg.	1.3
5		BMAA2	1	Pg.	1.3
6		BMAA1	1	Pg.	1.3
7		BMAA7	1	Pg.	1.3
8		BMAA5	1	Pg.	1.3
9		BMAA4	1	Pg.	1.3
10		BMAA3	1	Pg.	1.3
11		BMAA6	1	Pg.	1.3
12		LRO6	1	Pg.	1.3
13		CASL0	1	Pg.	1.3
E58	29353	BUFENBL	1	Pg.	1.3
1		MD24	1	Pg.	1.3
2		MD25	1	Pg.	1.3
3		MD26	1	Pg.	1.3
4		MD27	1	Pg.	1.3
5		MD28	1	Pg.	1.3
6		MD29	1	Pg.	1.3
7		MD30	1	Pg.	1.3
8		MD31	1	Pg.	1.3
9		PEL3	1	Pg.	1.3
10		GND	1	Pg.	1.3
11		BUFENBL	1	Pg.	1.3
12		BDIRTL	1	Pg.	1.3
13		BDIRTL	1	Pg.	1.3
14		PD3	1	Pg.	1.3
15		RD31	1	Pg.	1.3
16		RD30	1	Pg.	1.3
17		RD29	1	Pg.	1.3
18		RD28	1	Pg.	1.3
19		RD27	1	Pg.	1.3
20		RD26	1	Pg.	1.3
21		RD25	1	Pg.	1.3
22		RD24	1	Pg.	1.3
E59	F174	BUVRESETL	1	Pg.	2.1.1
1		BMCAS2	1	Pg.	2.1.1
2		ENBCAS2	1	Pg.	2.1.1
3		ENBCAS3	1	Pg.	2.1.1
4		BMCAS3	1	Pg.	2.1.1
5		ENBCAS1	1	Pg.	2.1.1
6		BMCAS1	1	Pg.	2.1.1
7		UVCLKOH	1	Pg.	2.1.1
8		BMCAS0	1	Pg.	2.1.1
9		ENBCAS0	1	Pg.	2.1.1
10		E59P12H	1	Pg.	2.1.1
11		E59P13H	1	Pg.	2.1.1
12		E59P12H	1	Pg.	2.1.1
13		E59P12H	1	Pg.	2.1.1
14		RASALLH	1	Pg.	2.1.1
15					
E60	256K	BMAA8	1	Pg.	1.3
1		LRO29	1	Pg.	1.3
2		BMSWTL0	1	Pg.	1.3
3		RASL81	1	Pg.	1.3
4		BMAA0	1	Pg.	1.3
5		BMAA2	1	Pg.	1.3
6		BMAA1	1	Pg.	1.3
7		BMAA7	1	Pg.	1.3
8		BMAA5	1	Pg.	1.3
9		BMAA4	1	Pg.	1.3
10		BMAA3	1	Pg.	1.3
11		BMAA6	1	Pg.	1.3
12		LRO29	1	Pg.	1.3
13		CASL3	1	Pg.	1.3
E61	256K	BMAA8	1	Pg.	1.3
1		LRO21	1	Pg.	1.3
2		BMSWTL0	1	Pg.	1.3
3		RASL81	1	Pg.	1.3
4		BMAA0	1	Pg.	1.3
5		BMAA2	1	Pg.	1.3
6		BMAA1	1	Pg.	1.3
7		BMAA7	1	Pg.	1.3
8		BMAA5	1	Pg.	1.3
9		BMAA4	1	Pg.	1.3
10		BMAA3	1	Pg.	1.3
11		BMAA6	1	Pg.	1.3
12		LRO21	1	Pg.	1.3
13		CASL2	1	Pg.	1.3
E62	256K	BMAA8	1	Pg.	1.3
1		LRO13	1	Pg.	1.3
2		BMSWTL0	1	Pg.	1.3

E54		29853	BUF ENB(L)	Pg.	1.3
1	MD16	MD<16>H	Pg.	1.3	
2	MD17	MD<17>H	Pg.	1.3	
3	MD18	MD<18>H	Pg.	1.3	
4	MD19	MD<19>H	Pg.	1.3	
5	MD20	MD<20>H	Pg.	1.3	
6	MD21	MD<21>H	Pg.	1.3	
7	MD22	MD<22>H	Pg.	1.3	
8	MD23	MD<23>H	Pg.	1.3	
9	PEL2	PEL<2>L	Pg.	1.3	
10	GND	GND	Pg.	1.3	
11	BUFENBL	BUF ENB(L)	Pg.	1.3	
12	BDIRTL	BDIRT(L)	Pg.	1.3	
13	PD2	PD<2>H	Pg.	1.3	
14	RD23	RD<23>H	Pg.	1.3	
15	RD23	RD<23>H	Pg.	1.3	
16	RD22	RD<22>H	Pg.	1.3	
17	RD21	RD<21>H	Pg.	1.3	
18	RD20	RD<20>H	Pg.	1.3	
19	RD19	RD<19>H	Pg.	1.3	
20	RD18	RD<18>H	Pg.	1.3	
21	RD17	RD<17>H	Pg.	1.3	
22	RD16	RD<16>H	Pg.	1.3	
E55		F32	RUN(L)	Pg.	1.10
1	RRH	RR<H>	Pg.	1.10	
2	SRUNL	SRUN(L)	Pg.	1.10	
3	RDCCKL	RDCCK(L)	Pg.	1.10	
4	BUVRESETH	BUVRESETH	Pg.	1.10	
5	FORCEINITH	FORCEINITH	Pg.	1.10	
6	E17P5L	E17P5(L)	Pg.	1.10	
7	DMAMAL	DMA->MAL	Pg.	1.10	
8	SELCOLL	SELCOL(L)	Pg.	1.10	
9	E65P11L	E65P11(L)	Pg.	1.10	
10	ARMUVDALL	ARM UVDAL(L)	Pg.	1.10	
11	PERRL	PERR(L)	Pg.	1.10	
E56		F521	GND	Pg.	1.10
1	GND	GND	Pg.	1.10	
2	UVDAL24	UVDAL<24>H	Pg.	1.10	
3	GND	GND	Pg.	1.10	
4	UVDAL25	UVDAL<25>H	Pg.	1.10	
5	GND	GND	Pg.	1.10	
6	UVDAL26	UVDAL<26>H	Pg.	1.10	
7	GND	GND	Pg.	1.10	
8	UVDAL27	UVDAL<27>H	Pg.	1.10	
9	GND	GND	Pg.	1.10	
10	UVDAL28	UVDAL<28>H	Pg.	1.10	
11	GND	GND	Pg.	1.10	
12	UVDAL29	UVDAL<29>H	Pg.	1.10	
13	A3VA	+3VA H	Pg.	1.10	
14	UVC52	UVC5<2>H	Pg.	1.10	
15	GND	GND	Pg.	1.10	
16	GND	GND	Pg.	1.10	
17	SELLO16MBL	SEL LO16MB(L)	Pg.	1.10	
E57		256K	BMAA<8>H	Pg.	1.3
1	LRO28	LRO<28>H	Pg.	1.3	
2	BMSWTL0	BMSWT<0>L	Pg.	1.3	
3	RASL81	RAS<81>L	Pg.	1.3	
4	BMAA0	BMAA<0>H	Pg.	1.3	
5	BMAA2	BMAA<2>H	Pg.	1.3	
6	BMAA1	BMAA<1>H	Pg.	1.3	
7	BMAA7	BMAA<7>H	Pg.	1.3	
8	BMAA5	BMAA<5>H	Pg.	1.3	
9	BMAA4	BMAA<4>H	Pg.	1.3	
10	BMAA3	BMAA<3>H	Pg.	1.3	
11	BMAA6	BMAA<6>H	Pg.	1.3	
12	LRO28	LRO<28>H	Pg.	1.3	
13	CASL3	CAS<3>L	Pg.	1.3	
E58		256K	BMAA<8>H	Pg.	1.3
1	LRO28	LRO<28>H	Pg.	1.3	
2	BMSWTL0	BMSWT<0>L	Pg.	1.3	
3	RASL81	RAS<81>L	Pg.	1.3	
4	BMAA0	BMAA<0>H	Pg.	1.3	
5	BMAA2	BMAA<2>H	Pg.	1.3	
6	BMAA1	BMAA<1>H	Pg.	1.3	
7	BMAA7	BMAA<7>H	Pg.	1.3	
8	BMAA5	BMAA<5>H	Pg.	1.3	
9	BMAA4	BMAA<4>H	Pg.	1.3	
10	BMAA3	BMAA<3>H	Pg.	1.3	
11	BMAA6	BMAA<6>H	Pg.	1.3	
12	LRO28	LRO<28>H	Pg.	1.3	
13	CASL2	CAS<2>L	Pg.	1.3	
E59		256K	BMAA<8>H	Pg.	1.3
1	LRO12	LRO<12>H	Pg.	1.3	
2	BMSWTL0	BMSWT<0>L	Pg.	1.3	
3	RASL80	RAS<80>L	Pg.	1.3	
4	BMAA0	BMAA<0>H	Pg.	1.3	
5	BMAA2	BMAA<2>H	Pg.	1.3	
6	BMAA1	BMAA<1>H	Pg.	1.3	
7	BMAA7	BMAA<7>H	Pg.	1.3	
8	BMAA5	BMAA<5>H	Pg.	1.3	
9	BMAA4	BMAA<4>H	Pg.	1.3	
10	BMAA3	BMAA<3>H	Pg.	1.3	
11	BMAA6	BMAA<6>H	Pg.	1.3	
12	LRO12	LRO<12>H	Pg.	1.3	
13	CASL1	CAS<1>L	Pg.	1.3	
E69		256K	BMAA<8>H	Pg.	1.3
1	LRO12	LRO<12>H	Pg.	1.3	
2	BMSWTL0	BMSWT<0>L	Pg.	1.3	
3	RASL80	RAS<80>L	Pg.	1.3	
4	BMAA0	BMAA<0>H	Pg.	1.3	
5	BMAA2	BMAA<2>H	Pg.	1.3	
6	BMAA1	BMAA<1>H	Pg.	1.3	
7	BMAA7	BMAA<7>H	Pg.	1.3	
8	BMAA5	BMAA<5>H	Pg.	1.3	
9	BMAA4	BMAA<4>H	Pg.	1.3	
10	BMAA3	BMAA<3>H	Pg.	1.3	
11	BMAA6	BMAA<6>H	Pg.	1.3	
12	LRO12	LRO<12>H	Pg.	1.3	
13	CASL1	CAS<1>L	Pg.	1.3	
E70		256K	BMAA<8>H	Pg.	1.3
1	LRO4	LRO<4>H	Pg.	1.3	
2	BMSWTL0	BMSWT<0>L	Pg.	1.3	
3	RASL80	RAS<80>L	Pg.	1.3	
4	BMAA0	BMAA<0>H	Pg.	1.3	
5	BMAA2	BMAA<2>H	Pg.	1.3	
6	BMAA1	BMAA<1>H	Pg.	1.3	
7	BMAA7	BMAA<7>H	Pg.	1.3	
8	BMAA5	BMAA<5>H	Pg.	1.3	
9	BMAA4	BMAA<4>H	Pg.	1.3	
10	BMAA3	BMAA<3>H	Pg.	1.3	
11	BMAA6	BMAA<6>H	Pg.	1.3	
12	LRO4	LRO<4>H	Pg.	1.3	
13	CASL0	CAS<0>L	Pg.	1.3	
E71		F245	UVWR(H)	Pg.	1.10
1	UVDAL26	UVDAL<26>H	Pg.	1.10	
2	UVDAL25	UVDAL<25>H	Pg.	1.10	
3	UVDAL28	UVDAL<28>H	Pg.	1.10	
4	UVDAL24	UVDAL<24>H	Pg.	1.10	
5	UVDAL29	UVDAL<29>H	Pg.	1.10	
6	UVDAL18	UVDAL<18>H	Pg.	1.10	
7	UVDAL15	UVDAL<15>H	Pg.	1.10	
8	UVDAL27	UVDAL<27>H	Pg.	1.10	
9	MD27	MD<27>H	Pg.	1.10	
10	MD15	MD<15>H	Pg.	1.10	
11	MD18	MD<18>H	Pg.	1.10	
12	MD29	MD<29>H	Pg.	1.10	
13	MD24	MD<24>H	Pg.	1.10	
14	MD28	MD<28>H	Pg.	1.10	
15	MD25	MD<25>H	Pg.	1.10	
16	MD26	MD<26>H	Pg.	1.10	
17	ARMUVDALL	ARM UVDAL(L)	Pg.	1.10	
E72		F158	SELCOLL	Pg.	1.3
1	MA13	MA<13>H	Pg.	1.3	
2	MA5	MA<5>H	Pg.	1.3	
3	MAAL3	MAA<3>L	Pg.	1.3	
4	MA12	MA<12>H	Pg.	1.3	
5	MA4	MA<4>H	Pg.	1.3	
6	MAAL2	MAA<2>L	Pg.	1.3	
7	MAAL1	MAA<1>L	Pg.	1.3	
8	MA3	MA<3>H	Pg.	1.3	
9	MA11	MA<11>H	Pg.	1.3	
10	MAAL0	MAA<0>L	Pg.	1.3	
11	MA2	MA<2>H	Pg.	1.3	
12	MA10	MA<10>H	Pg.	1.3	
13	SGIL	SGI(L)	Pg.	1.3	
E73		F373	UVDAL->MA(L)	Pg.	1.10
1	LO16MBL	LO16MB(L)	Pg.	1.10	
2	SELLO16MBL	SEL LO16MB(L)	Pg.	1.10	
3	UVDAL5	UVDAL<5>H	Pg.	1.10	
4	MA5	MA<5>H	Pg.	1.10	
5	MA12	MA<12>H	Pg.	1.10	
6	UVDAL12	UVDAL<12>H	Pg.	1.10	
7	UVDAL13	UVDAL<13>H	Pg.	1.10	
8	MA13	MA<13>H	Pg.	1.10	
9	BUVASL	BUVAS(L)	Pg.	1.10	
10	MA11	MA<11>H	Pg.	1.10	
11	UVDAL11	UVDAL<11>H	Pg.	1.10	
12	UVDAL3	UVDAL<3>H	Pg.	1.10	
13	MA3	MA<3>H	Pg.	1.10	
14	MA2	MA<2>H	Pg.	1.10	
15	UVDAL2	UVDAL<2>H	Pg.	1.10	
16	UVDAL10	UVDAL<10>H	Pg.	1.10	
17	MA10	MA<10>H	Pg.	1.10	
E74		256K	BMAA<8>H	Pg.	1.3
1	LRO27	LRO<27>H	Pg.	1.3	
2	BMSWTL0	BMSWT<0>L	Pg.	1.3	
3	RASL81	RAS<81>L	Pg.	1.3	
4	BMAA0	BMAA<0>H	Pg.	1.3	
5	BMAA2	BMAA<2>H	Pg.	1.3	
6	BMAA1	BMAA<1>H	Pg.	1.3	
7	BMAA7	BMAA<7>H	Pg.	1.3	
8	BMAA5	BMAA<5>H	Pg.	1.3	
9	BMAA4	BMAA<4>H	Pg.	1.3	
10	BMAA3	BMAA<3>H	Pg.	1.3	
11	BMAA6	BMAA<6>H	Pg.	1.3	
12	LRO27	LRO<27>H	Pg.	1.3	
13	CASL3	CAS<3>L	Pg.	1.3	
E75		256K	BMAA<8>H	Pg.	1.3
1	LRO19	LRO<19>H	Pg.	1.3	
2	BMSWTL0	BMSWT<0>L	Pg.	1.3	
3	RASL81	RAS<81>L	Pg.	1.3	
4	BMAA0	BMAA<0>H	Pg.	1.3	
5	BMAA2	BMAA<2>H	Pg.	1.3	
6	BMAA1	BMAA<1>H	Pg.	1.3	
7	BMAA7	BMAA<7>H	Pg.	1.3	
8	BMAA5	BMAA<5>H	Pg.	1.3	
9	BMAA4	BMAA<4>H	Pg.	1.3	
10	BMAA3	BMAA<3>H	Pg.	1.3	
11	BMAA6	BMAA<6>H	Pg.	1.3	
12	LRO19	LRO<19>H	Pg.	1.3	
13	CASL2	CAS<2>L	Pg.	1.3	
E76		256K	BMAA<8>H	Pg.	1.3
1	LRO11	LRO<11>H	Pg.	1.3	
2	BMSWTL0	BMSWT<0>L	Pg.	1.3	
3	RASL80	RAS<80>L	Pg.	1.3	
4	BMAA0	BMAA<0>H	Pg.	1.3	
5	BMAA2	BMAA<2>H	Pg.	1.3	
6	BMAA1	BMAA<1>H	Pg.	1.3	
7	BMAA7	BMAA<7>H	Pg.	1.3	
8	BMAA5	BMAA<5>H	Pg.	1.3	
9	BMAA4	BMAA<4>H	Pg.	1.3	
10					



E97	256K	BMAA8	BMAA8>H	Pg.	1.3
1	BMAA8	LRD8	LRD<8>H	Pg.	1.3
2	BMSWTL0	BMSWTL0	BMSWTL<0>L	Pg.	1.3
3	RASL80	RAS<80>L	RAS<80>L	Pg.	1.3
4	BMAA0	BMAA0>H	BMAA0>H	Pg.	1.3
5	BMAA2	BMAA2>H	BMAA2>H	Pg.	1.3
6	BMAA1	BMAA1>H	BMAA1>H	Pg.	1.3
7	BMAA7	BMAA7>H	BMAA7>H	Pg.	1.3
8	BMAA5	BMAA5>H	BMAA5>H	Pg.	1.3
9	BMAA4	BMAA4>H	BMAA4>H	Pg.	1.3
10	BMAA3	BMAA3>H	BMAA3>H	Pg.	1.3
11	BMAA6	BMAA6>H	BMAA6>H	Pg.	1.3
12	LRD8	LRD<8>H	LRD<8>H	Pg.	1.3
13	CASL1	CAS<1>L	CAS<1>L	Pg.	1.3
E98	256K	BMAA8	BMAA8>H	Pg.	1.3
1	BMAA8	LRD8	LRD<8>H	Pg.	1.3
2	BMSWTL0	BMSWTL0	BMSWTL<0>L	Pg.	1.3
3	RASL80	RAS<80>L	RAS<80>L	Pg.	1.3
4	BMAA0	BMAA0>H	BMAA0>H	Pg.	1.3
5	BMAA2	BMAA2>H	BMAA2>H	Pg.	1.3
6	BMAA1	BMAA1>H	BMAA1>H	Pg.	1.3
7	BMAA7	BMAA7>H	BMAA7>H	Pg.	1.3
8	BMAA5	BMAA5>H	BMAA5>H	Pg.	1.3
9	BMAA4	BMAA4>H	BMAA4>H	Pg.	1.3
10	BMAA3	BMAA3>H	BMAA3>H	Pg.	1.3
11	BMAA6	BMAA6>H	BMAA6>H	Pg.	1.3
12	LRD8	LRD<8>H	LRD<8>H	Pg.	1.3
13	CASL0	CAS<0>L	CAS<0>L	Pg.	1.3
E99	F245	UVWRH	UVWR<H>	Pg.	1.10
1	UVWRH	UVDAL4	UVDAL<4>H	Pg.	1.10
2	UVDAL3	UVDAL<3>H	UVDAL<3>H	Pg.	1.10
3	UVDAL2	UVDAL<2>H	UVDAL<2>H	Pg.	1.10
4	UVDAL7	UVDAL<7>H	UVDAL<7>H	Pg.	1.10
5	UVDAL6	UVDAL<6>H	UVDAL<6>H	Pg.	1.10
6	UVDAL5	UVDAL<5>H	UVDAL<5>H	Pg.	1.10
7	UVDAL1	UVDAL<1>H	UVDAL<1>H	Pg.	1.10
8	UVDAL0	UVDAL<0>H	UVDAL<0>H	Pg.	1.10
9	MD0	MD<0>H	MD<0>H	Pg.	1.10
10	MD1	MD<1>H	MD<1>H	Pg.	1.10
11	MD5	MD<5>H	MD<5>H	Pg.	1.10
12	MD6	MD<6>H	MD<6>H	Pg.	1.10
13	MD7	MD<7>H	MD<7>H	Pg.	1.10
14	MD2	MD<2>H	MD<2>H	Pg.	1.10
15	MD3	MD<3>H	MD<3>H	Pg.	1.10
16	MD4	MD<4>H	MD<4>H	Pg.	1.10
17	ARMUVDALL	ARM UVDAL<L>	ARM UVDAL<L>	Pg.	1.10
E100	F537	RAS2	RAS<2>H	Pg.	1.1
1	RAS2	RAS1	RAS<1>H	Pg.	1.1
2	RAS0	RAS<0>H	RAS<0>H	Pg.	1.1
3	RASALLH	RAS ALL<H>	RAS ALL<H>	Pg.	1.1
4	SG1L	SG1<L>	SG1<L>	Pg.	1.1
5	E79P14H	E79P14<H>	E79P14<H>	Pg.	1.1
6	E79P13H	E79P13<H>	E79P13<H>	Pg.	1.1
7	RAS5	RAS<5>H	RAS<5>H	Pg.	1.1
8	RAS6	RAS<6>H	RAS<6>H	Pg.	1.1
9	RAS7	RAS<7>H	RAS<7>H	Pg.	1.1
10	RAS8	RAS<8>H	RAS<8>H	Pg.	1.1
11	LOCALNXMH	LOCAL NXM<H>	LOCAL NXM<H>	Pg.	1.1
12	E100P14H	E100P14<H>	E100P14<H>	Pg.	1.1
13	RASDECODEL	RAS DECODE<L>	RAS DECODE<L>	Pg.	1.1
14	MEMCD0	MEM CD<0>H	MEM CD<0>H	Pg.	1.1
15	MEMCD1	MEM CD<1>H	MEM CD<1>H	Pg.	1.1
16	RA54	RAS<4>H	RAS<4>H	Pg.	1.1
17	RA53	RAS<3>H	RAS<3>H	Pg.	1.1

E101	F158	SELCOLL	SELCOL<L>	Pg.	1.3
1	SELCOLL	MA15	MA<15>H	Pg.	1.3
2	MA15	MA8	MA<8>H	Pg.	1.3
3	MA8	MAAL6	MAA<6>L	Pg.	1.3
4	MAAL6	MA19	MA<19>H	Pg.	1.3
5	MA19	MA18	MA<18>H	Pg.	1.3
6	MA18	MAAL8	MAA<8>L	Pg.	1.3
7	MAAL8	MAAL4	MAA<4>L	Pg.	1.3
8	MAAL4	MA6	MA<6>H	Pg.	1.3
9	MA6	MA14	MA<14>H	Pg.	1.3
10	MA14	NC	NC H	Pg.	1.3
11	NC	GND	GND	Pg.	1.3
12	GND	GND	GND	Pg.	1.3
13	GND	GND	GND	Pg.	1.3
14	GND	GND	GND	Pg.	1.3
15	SG1L	SG1<L>	SG1<L>	Pg.	1.3
E102	256K	BMAA8	BMAA8>H	Pg.	1.3
1	BMAA8	LRD8	LRD<8>H	Pg.	1.3
2	BMSWTL0	BMSWTL0	BMSWTL<0>L	Pg.	1.3
3	RASL80	RAS<80>L	RAS<80>L	Pg.	1.3
4	BMAA0	BMAA0>H	BMAA0>H	Pg.	1.3
5	BMAA2	BMAA2>H	BMAA2>H	Pg.	1.3
6	BMAA1	BMAA1>H	BMAA1>H	Pg.	1.3
7	BMAA7	BMAA7>H	BMAA7>H	Pg.	1.3
8	BMAA5	BMAA5>H	BMAA5>H	Pg.	1.3
9	BMAA4	BMAA4>H	BMAA4>H	Pg.	1.3
10	BMAA3	BMAA3>H	BMAA3>H	Pg.	1.3
11	BMAA6	BMAA6>H	BMAA6>H	Pg.	1.3
12	LRD8	LRD<8>H	LRD<8>H	Pg.	1.3
13	CASL3	CAS<3>L	CAS<3>L	Pg.	1.3
E103	256K	BMAA8	BMAA8>H	Pg.	1.3
1	BMAA8	LRD8	LRD<8>H	Pg.	1.3
2	BMSWTL0	BMSWTL0	BMSWTL<0>L	Pg.	1.3
3	RASL80	RAS<80>L	RAS<80>L	Pg.	1.3
4	BMAA0	BMAA0>H	BMAA0>H	Pg.	1.3
5	BMAA2	BMAA2>H	BMAA2>H	Pg.	1.3
6	BMAA1	BMAA1>H	BMAA1>H	Pg.	1.3
7	BMAA7	BMAA7>H	BMAA7>H	Pg.	1.3
8	BMAA5	BMAA5>H	BMAA5>H	Pg.	1.3
9	BMAA4	BMAA4>H	BMAA4>H	Pg.	1.3
10	BMAA3	BMAA3>H	BMAA3>H	Pg.	1.3
11	BMAA6	BMAA6>H	BMAA6>H	Pg.	1.3
12	LRD8	LRD<8>H	LRD<8>H	Pg.	1.3
13	CASL2	CAS<2>L	CAS<2>L	Pg.	1.3
E104	256K	BMAA8	BMAA8>H	Pg.	1.3
1	BMAA8	LRD8	LRD<8>H	Pg.	1.3
2	BMSWTL0	BMSWTL0	BMSWTL<0>L	Pg.	1.3
3	RASL80	RAS<80>L	RAS<80>L	Pg.	1.3
4	BMAA0	BMAA0>H	BMAA0>H	Pg.	1.3
5	BMAA2	BMAA2>H	BMAA2>H	Pg.	1.3
6	BMAA1	BMAA1>H	BMAA1>H	Pg.	1.3
7	BMAA7	BMAA7>H	BMAA7>H	Pg.	1.3
8	BMAA5	BMAA5>H	BMAA5>H	Pg.	1.3
9	BMAA4	BMAA4>H	BMAA4>H	Pg.	1.3
10	BMAA3	BMAA3>H	BMAA3>H	Pg.	1.3
11	BMAA6	BMAA6>H	BMAA6>H	Pg.	1.3
12	LRD8	LRD<8>H	LRD<8>H	Pg.	1.3
13	CASL1	CAS<1>L	CAS<1>L	Pg.	1.3

E105	256K	BMAA8	BMAA8>H	Pg.	1.3
1	BMAA8	LRD8	LRD<8>H	Pg.	1.3
2	BMSWTL0	BMSWTL0	BMSWTL<0>L	Pg.	1.3
3	RASL80	RAS<80>L	RAS<80>L	Pg.	1.3
4	BMAA0	BMAA0>H	BMAA0>H	Pg.	1.3
5	BMAA2	BMAA2>H	BMAA2>H	Pg.	1.3
6	BMAA1	BMAA1>H	BMAA1>H	Pg.	1.3
7	BMAA7	BMAA7>H	BMAA7>H	Pg.	1.3
8	BMAA5	BMAA5>H	BMAA5>H	Pg.	1.3
9	BMAA4	BMAA4>H	BMAA4>H	Pg.	1.3
10	BMAA3	BMAA3>H	BMAA3>H	Pg.	1.3
11	BMAA6	BMAA6>H	BMAA6>H	Pg.	1.3
12	LRD8	LRD<8>H	LRD<8>H	Pg.	1.3
13	CASL0	CAS<0>L	CAS<0>L	Pg.	1.3
E106	29853	BUFENBL	BUF ENB<L>	Pg.	1.3
1	BUFENBL	MD0	MD<0>H	Pg.	1.3
2	MD0	MD1	MD<1>H	Pg.	1.3
3	MD1	MD2	MD<2>H	Pg.	1.3
4	MD2	MD3	MD<3>H	Pg.	1.3
5	MD3	MD4	MD<4>H	Pg.	1.3
6	MD4	MD5	MD<5>H	Pg.	1.3
7	MD5	MD6	MD<6>H	Pg.	1.3
8	MD6	MD7	MD<7>H	Pg.	1.3
9	MD7	PEL0	PE<0>L	Pg.	1.3
10	PEL0	GND	GND	Pg.	1.3
11	GND	BUF ENB<L>	BUF ENB<L>	Pg.	1.3
12	BUFENBL	BDIRTL	BDIRT<L>	Pg.	1.3
13	BDIRTL	LRD7	LRD<7>H	Pg.	1.3
14	LRD7	LRD6	LRD<6>H	Pg.	1.3
15	LRD6	LRD5	LRD<5>H	Pg.	1.3
16	LRD5	LRD4	LRD<4>H	Pg.	1.3
17	LRD4	LRD3	LRD<3>H	Pg.	1.3
18	LRD3	LRD2	LRD<2>H	Pg.	1.3
19	LRD2	LRD1	LRD<1>H	Pg.	1.3
20	LRD1	LRD0	LRD<0>H	Pg.	1.3
21	LRD0	F1 FUSE	F1 FUSE	Pg.	1.9
22	F1 FUSE	A120V	+12.0V	Pg.	1.9
23	A120V	J3P10H	J3P10<H>	Pg.	1.9
F2 FUSE	A50V	+5.0V	J2P20<L>	Pg.	1.10
J1 CONN50	GND	GND	GND	Pg.	1.3
1	GND	MD0	MD<0>H	Pg.	1.3
2	MD0	MD1	MD<1>H	Pg.	1.3
3	MD1	MD2	MD<2>H	Pg.	1.3
4	MD2	MD3	MD<3>H	Pg.	1.3
5	MD3	GND	GND	Pg.	1.3
6	GND	MD5	MD<5>H	Pg.	1.3
7	MD5	MD4	MD<4>H	Pg.	1.3
8	MD4	MD7	MD<7>H	Pg.	1.3
9	MD7	MD6	MD<6>H	Pg.	1.3
10	MD6	MD9	MD<9>H	Pg.	1.3
11	MD9	MD8	MD<8>H	Pg.	1.3
12	MD8	GND	GND	Pg.	1.3
13	GND	MD10	MD<10>H	Pg.	1.3
14	MD10	MD11	MD<11>H	Pg.	1.3
15	MD11	MD12	MD<12>H	Pg.	1.3
16	MD12	MD13	MD<13>H	Pg.	1.3
17	MD13	MD14	MD<14>H	Pg.	1.3
18	MD14	PEL0	PE<0>L	Pg.	1.3
19	PEL0	GND	GND	Pg.	1.3
20	GND	BDIRTL	BDIRT<L>	Pg.	1.3
21	BDIRTL	MD16	MD<16>H	Pg.	1.3
22	MD16	BUFENBL1	BUF ENB<1>L	Pg.	1.3
23	BUFENBL1	PEL1	PE<1>L	Pg.	1.3
24	PEL1	GND	GND	Pg.	1.3
25	GND	GND	GND	Pg.	1.3
26	GND	GND	GND	Pg.	1.3

27	PEL3	PE<3>L	Pg.	1.3
28	BUFENBL0	BUF ENB<0>L	Pg.	1.3
29	MD15	MD<15>H	Pg.	1.3
30	GND	GND	Pg.	1.3
31	GND	GND	Pg.	1.3
32	PEL2	PE<2>L	Pg.	1.3
33	MD17	MD<17>H	Pg.	1.3
34	MD18	MD<18>H	Pg.	1.3
35	MD19	MD<19>H	Pg.	1.3
36	MD20	MD<20>H	Pg.	1.3
37	MD21	MD<21>H	Pg.	1.3
38	GND	GND	Pg.	1.3
39	MD23	MD<23>H	Pg.	1.3
40	MD22	MD<22>H	Pg.	1.3
41	MD25	MD<25>H	Pg.	1.3
42	MD24	MD<24>H	Pg.	1.3
43	MD27	MD<27>H	Pg.	1.3
44	MD26	MD<26>H	Pg.	1.3
45	GND	GND	Pg.	1.3
46	MD28	MD<28>H	Pg.	1.3
47	MD29	MD<29>H	Pg.	1.3
48	MD30	MD<30>H	Pg.	1.3
49	MD31	MD<31>H	Pg.	1.3
50	GND	GND	Pg.	1.3
J2 20PINCONN	GND	GND	Pg.	1.10
1	GND	GND	Pg.	1.10
2	GND	GND	Pg.	1.10
3	GND	GND	Pg.	1.10
4	J2P4L	J2P4<L>	Pg.	1.10
5	J2P5L	J2P5<L>	Pg.	1.10
6	GND	GND	Pg.	1.10
7	J2P7L	J2P7<L>	Pg.	1.10
8	J2P8L	J2P8<L>	Pg.	1.10
9	J2P9L	J2P9<L>	Pg.	1.10
10	BTRYVH	BTRYV<H>	Pg.	1.10
11	J2P11L	J2P11<L>	Pg.	1.10
12	GND	GND	Pg.	1.10
13	J2P13L	J2P13<L>	Pg.	1.10
14	J2P14L	J2P14<L>	Pg.	1.10
15	J2P15L	J2P15<L>	Pg.	1.10
16	GND	GND		

THIS DRAWING AND SPECIFICATIONS HEREBY ARE THE PROPERTY OF DIGITAL EQUIPMENT CORPORATION AND SHALL NOT BE REPRODUCED OR COPIED IN WHOLE OR IN PART AS THE BASIS FOR THE CONSTRUCTION OF ANY OF THEIR CURRENT OR FUTURE PRODUCTS.
 COPYRIGHT © 1965 DIGITAL EQUIPMENT CORPORATION

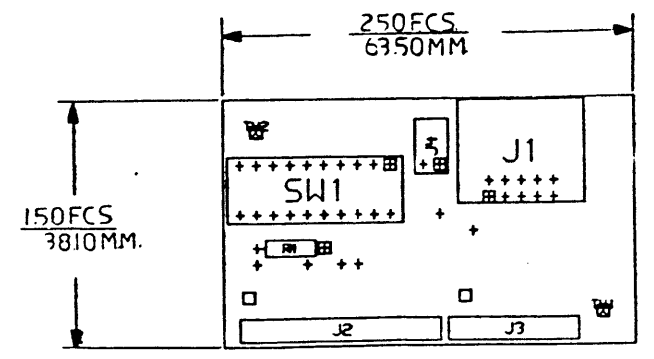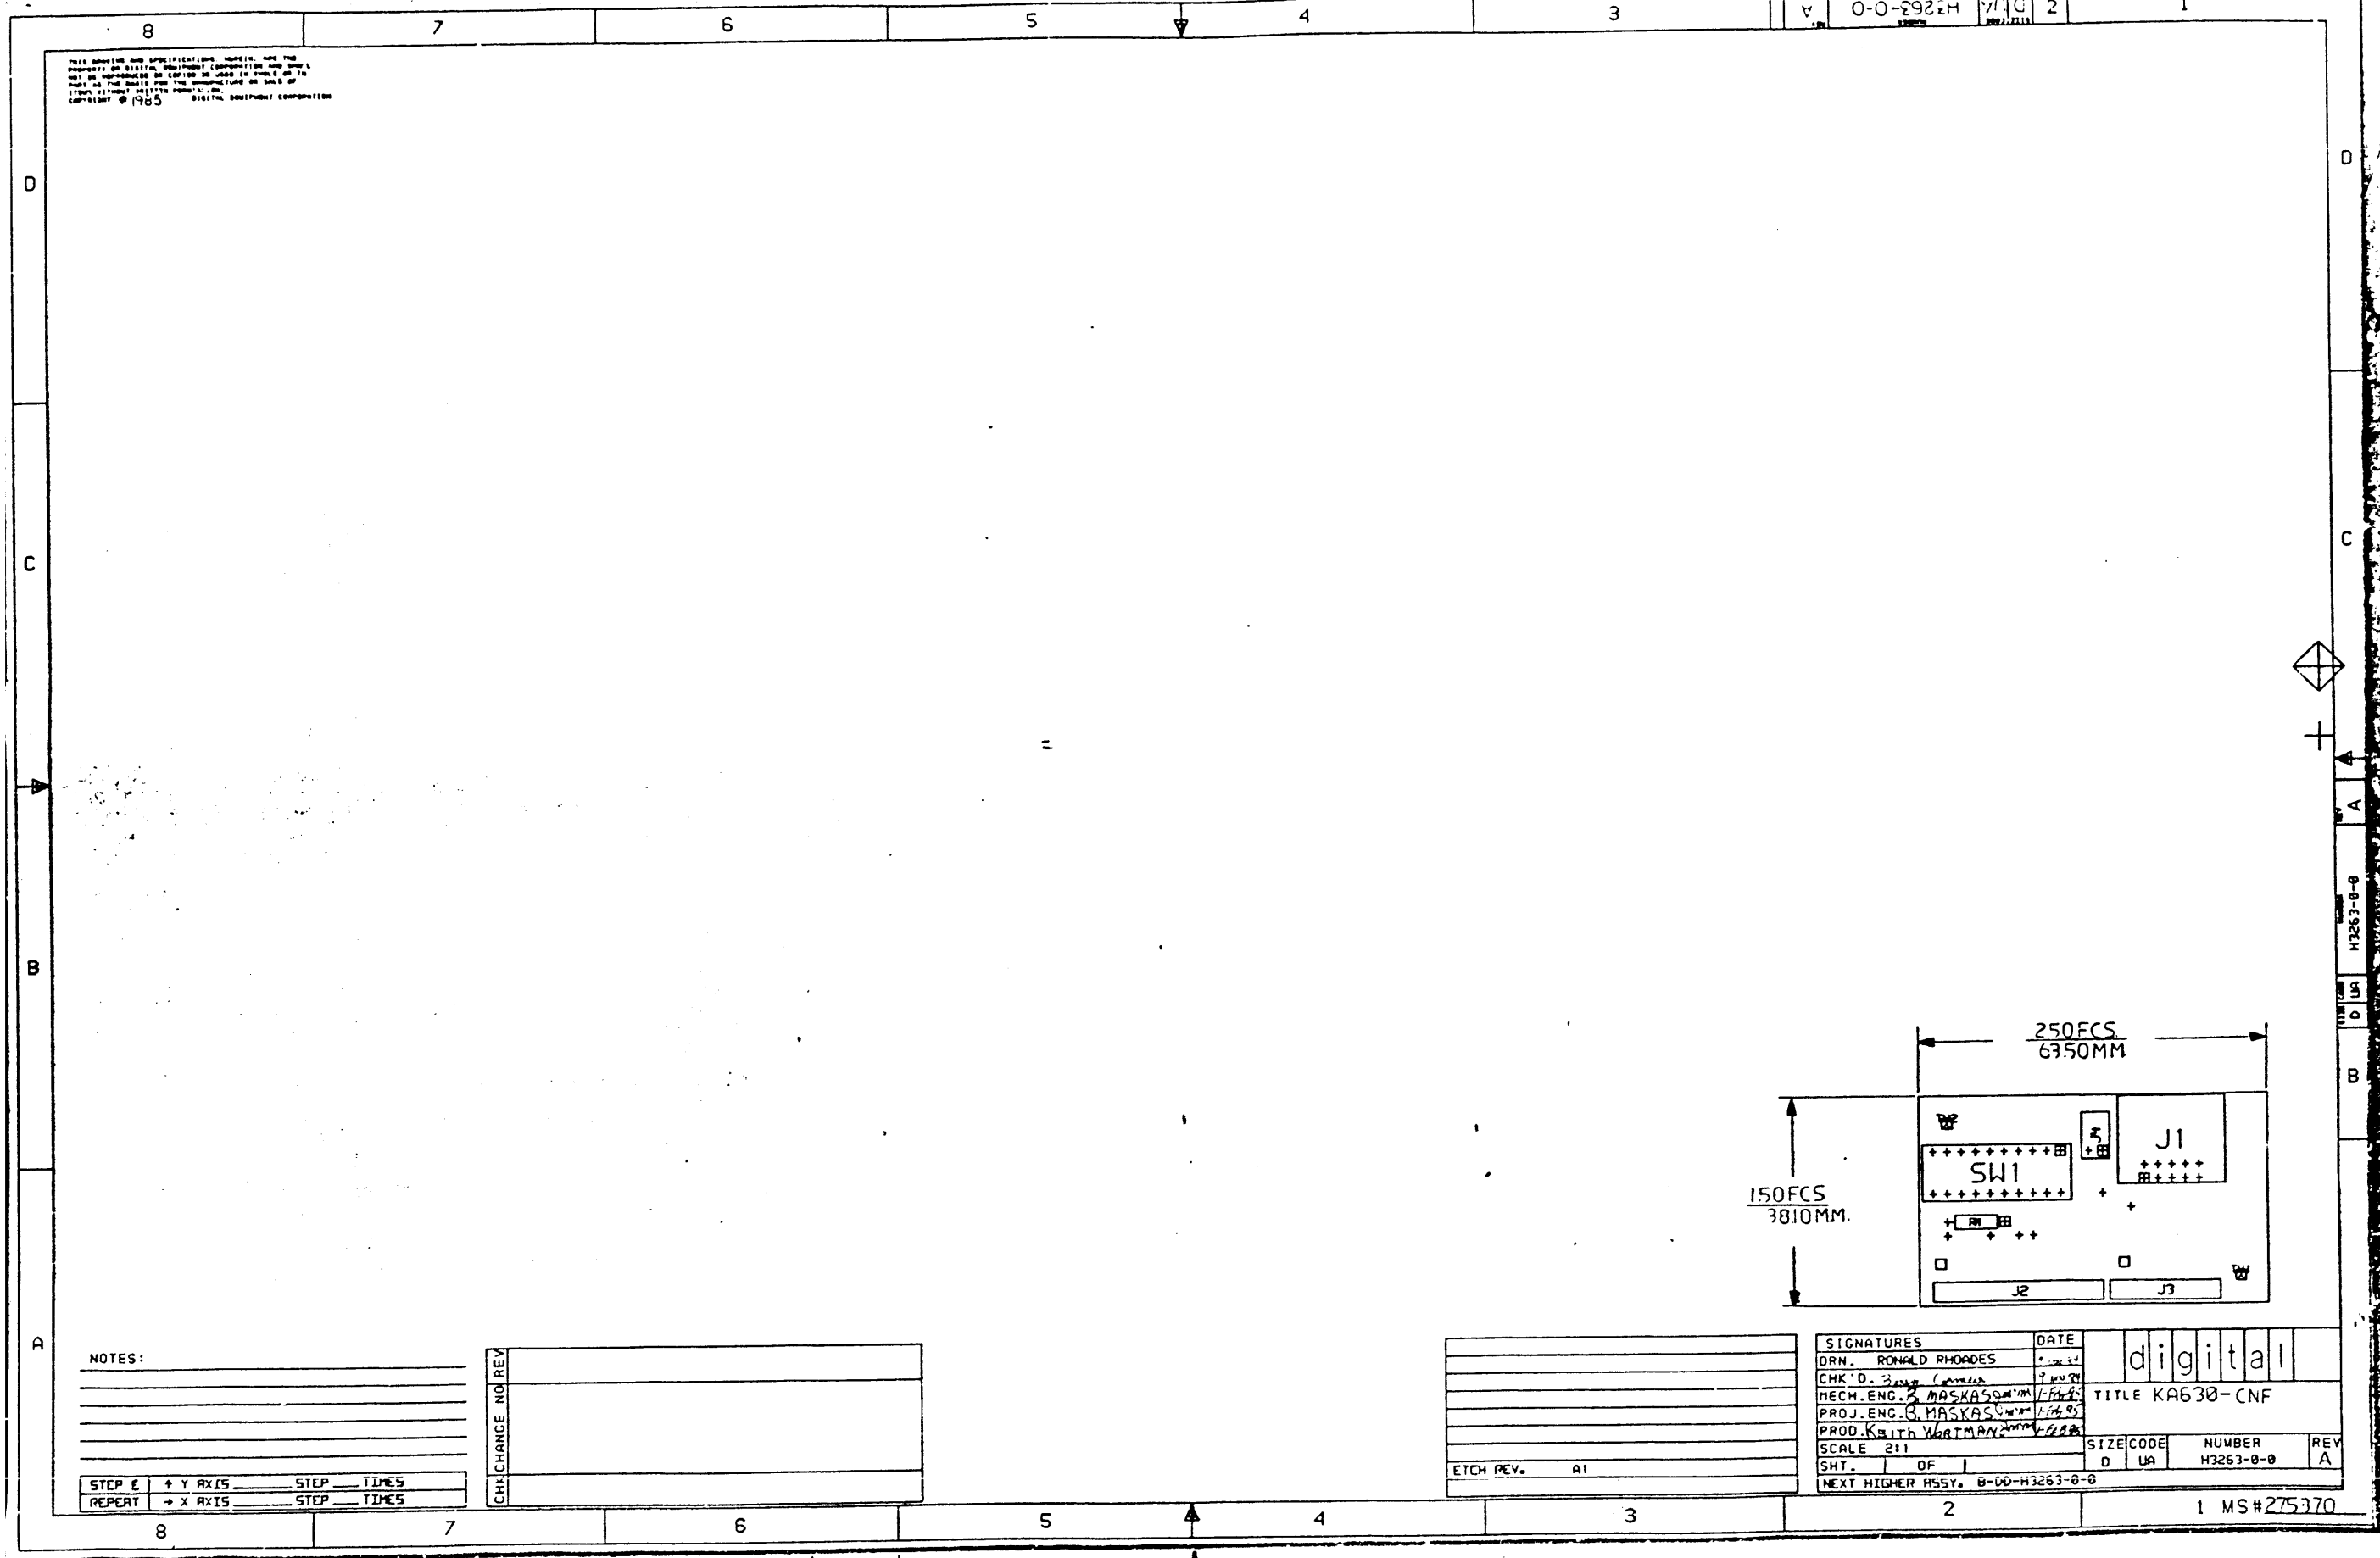

NOTES:

STEP	E	→ Y AXIS	STEP	TIMES
REPEAT		→ X AXIS	STEP	TIMES

CHK	CHANGE	NO	REV


ETCH	REV.	A1

SIGNATURES		DATE	digital
DRN.	RONALD RHOADES	7/20/65	
CHK'D.	3/2/66	7/20/65	TITLE KA630-CNF
MECH. ENG.	B. MASKAS	1/14/65	
PROJ. ENG.	B. MASKAS	1/14/65	
PROD.	KEITH WERTMAN	1/22/65	SIZE CODE NUMBER REV
SCALE	2:1	0 UA	
SHT.	OF	1	0 UA
NEXT HIGHER ASSY. 8-00-H3263-0-0			

LINE	ITEM	TOP DOCUMENT	PART NUMBER	MIN REV	DESCRIPTION	QTY PER VAR/REV	REFERENCE DESIGNATORS
1	1	D-MD-5016698-0-0	50-16698-01		CIRCUIT DRILL AND ETCH BOARD	1	
2	2		12-15563-05		CONN,P+S 14POS(2X07).100CC	1	J3
3	3		12-15563-06		CONN,P+S 24POS(2X12).100CC	1	J2
4	4		12-17310-00		SW,DIP 10POS/1PST 5VDC100MA S	1	SW1
5	5		12-14434-02		PCB,HEADER 02PIN(1X02).100CC 90D	1	J4
6	6		12-13506-04		PCB HEADER 09PIN(2X05).100CC 90D	1	J1
7	7		13-00365-00		1.0 K .25 W 5.0 % CF	1	R1

REVISION HISTORY		KPL MODULE FORMAT		SECTION A OF A		DRN: RONALD RHOADES		D I G I T A L	
ENG	ECO NUMBER	REV	SECTION/VARIATION INDEX		DATE	CHK'D	TITLE	PARTS LIST	
---	INITIAL	A	[A]	00	[M]	DATE: 08-NOV-84	B. CORMIER	KAG30-CNF	
BM	H3263-ML001	B	[B]		[N]	DATE: 03-DEC-84	B. MASKAS	DOCUMENT NUMBER	
			[C]		[P]	DATE: 03-DEC-84	B. MASKAS	SIZE	CODE
			[D]		[Q]	RESP.ENG.: B. MASKAS	DATE: 05-MAR-85	K	PL
			[E]		[R]	DATE: 05-MAR-85	MFG.ENG: K. WORKMAN	H3263-0-DBP	
			[F]		[S]	DATE: 05-MAR-85	DATE: 05-MAR-85	RELEASE DATE: 07-MAR-86	
			[G]		[T]		DATE: 05-MAR-85	RELEASE STATUS: RELEASED	
			[H]		[U]				
			[I]		[V]				
			[J]		[W]				
			[K]		[X]				
			[L]		[Y]				
BASIC PART NUMBER:		ASSEMBLY NUMBER:		TOP DOCUMENT NUMBER:		FILE NAME:		EDIT #	
H3263		D-UA-H3263-0-0		B-DD-H3263-0-0		ML547B.PLS		1	

"THIS DRAWING AND THE SPECIFICATIONS CONTAINED HEREIN ARE CONFIDENTIAL AND PROPRIETARY. THEY ARE THE PROPERTY OF DIGITAL EQUIPMENT CORPORATION AND SHALL NOT BE REPRODUCED OR COPIED OR USED IN WHOLE OR IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION. THIS IS AN UNPUBLISHED WORK PROTECTED UNDER THE FEDERAL COPYRIGHT LAWS."

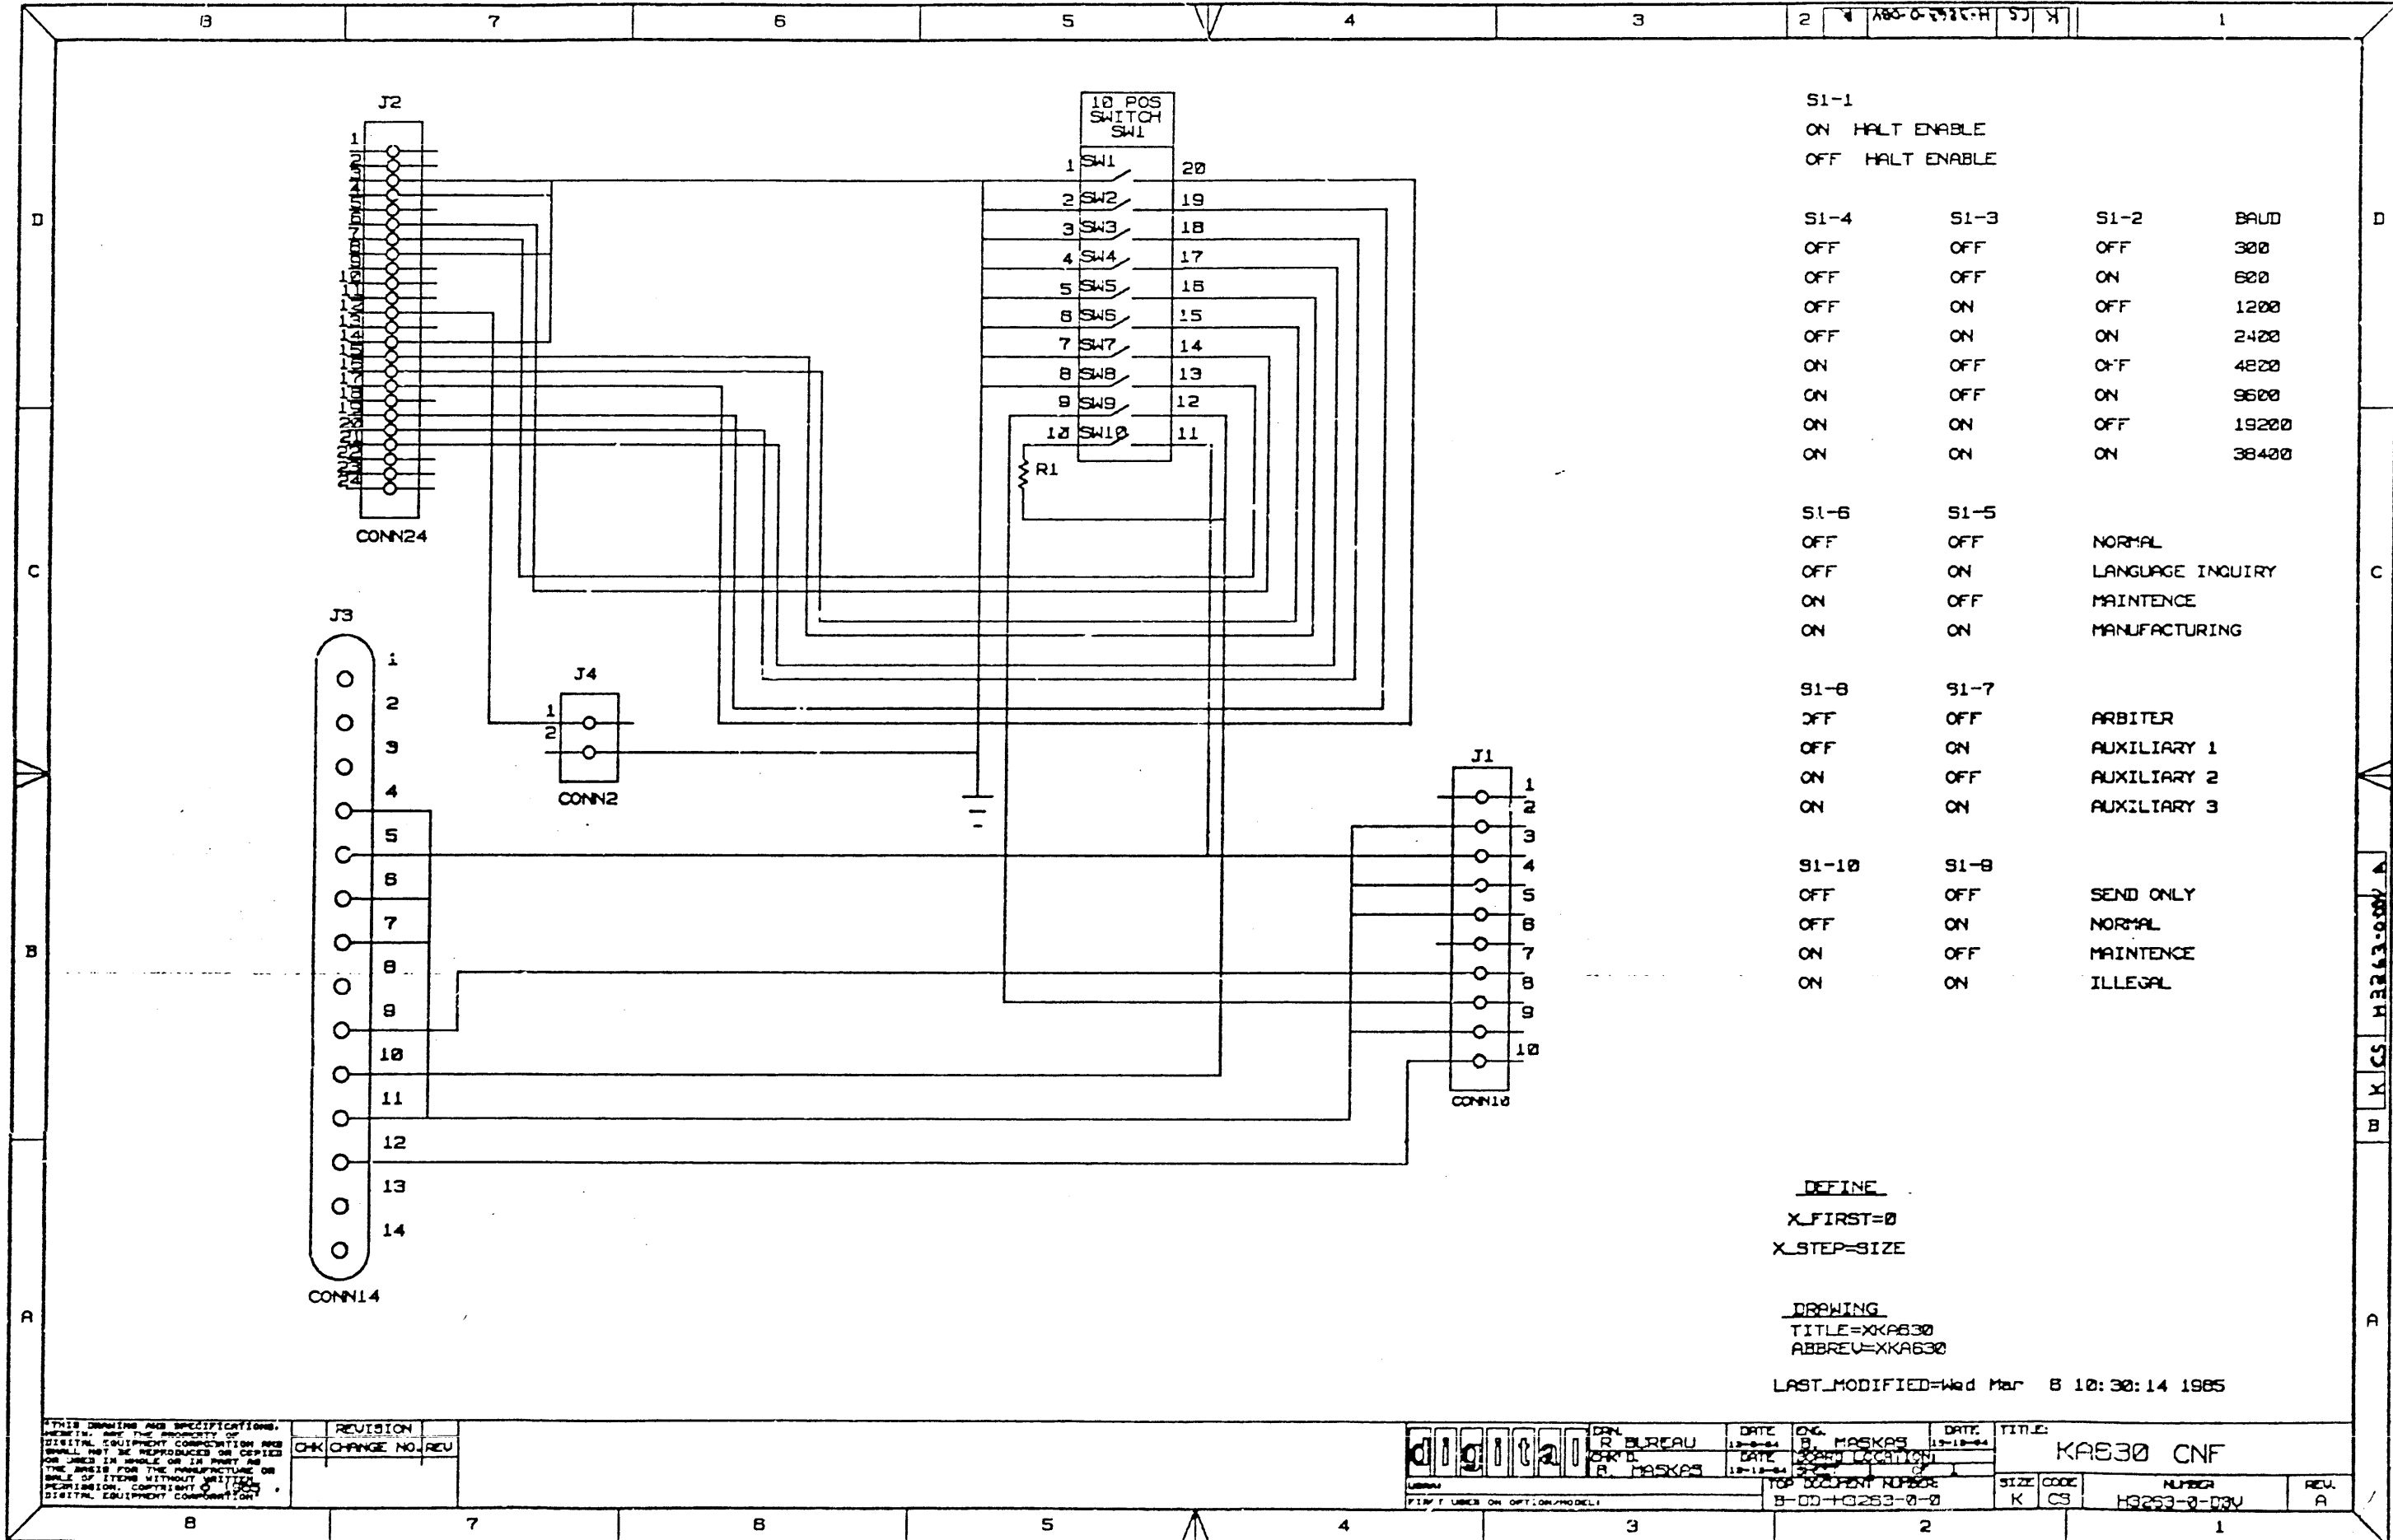

S1-1	ON	HALT ENABLE		
	OFF	HALT ENABLE		
S1-4	OFF		S1-3	OFF
OFF	OFF		OFF	OFF
OFF	OFF		ON	OFF
OFF	ON		ON	ON
ON	OFF		OFF	OFF
ON	ON		ON	ON
ON	ON		ON	ON
ON	ON		ON	ON
ON	ON		ON	ON
ON	ON		ON	ON
S1-6	OFF		S1-5	OFF
OFF	OFF		ON	ON
ON	ON		OFF	OFF
ON	ON		ON	ON
S1-8	OFF		S1-7	OFF
OFF	OFF		ON	ON
ON	ON		OFF	OFF
ON	ON		ON	ON
S1-10	OFF		S1-9	OFF
OFF	OFF		ON	ON
ON	ON		OFF	OFF
ON	ON		ON	ON

DEFINE
 X_FIRST=0
 X_STEP=SIZE

DRAWING
 TITLE=XXA630
 ABBREV=XXA630

LAST_MODIFIED=Wed Mar 8 10:30:14 1985