


SURFACE MOUNT 10BASE-T INTERFACE MODULE

Designed for Level One's LXT907

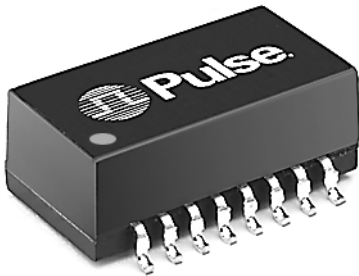

- ☑ Integrated for adapter, hub, and motherboard applications
- ☑ Designed to meet IEEE 802.3 10Base-T specifications
- ☑ Low profile, surface mount package
- ☑ 235°C peak solder reflow temperature rating

Electrical Specifications @ 25°C — Operating Temperature 0°C to +70°C

Part Number	Insertion Loss to 10MHz (db MAX)	Attenuation (dB MIN) XMIT			Return Loss 5 to 10 MHz (dB MIN)		Crosstalk (dB MIN) 5-10 MHz	Common Mode Rejection (dB MIN) XMIT					Hi-Pot (Vrms MIN)
		30 MHz	50 MHz	70 MHz	100 Ω	98 ± 13 Ω		30 MHz	50 MHz	100 MHz	200 MHz	500 MHz	
E2015	-1.2	-24	-30	-35	-18	-15	-35	-45	-40	-30	-20	-10	1500

U.S. Patent No. 5,015,981



NOTE:

1. For Tape & Reel packaging add a "T" suffix to the part number (i.e.: E2015T).
2. XMIT = Transmit Channel

Mechanical

Schematic

E2015

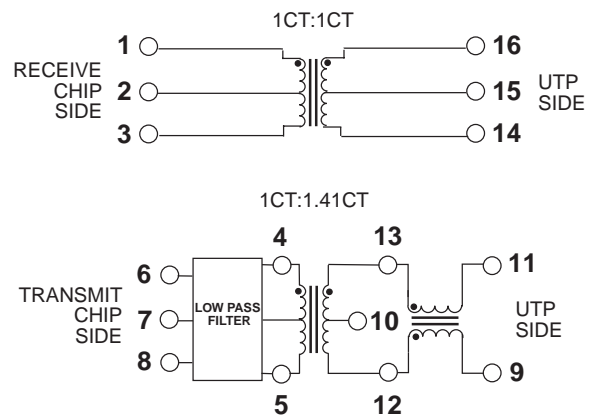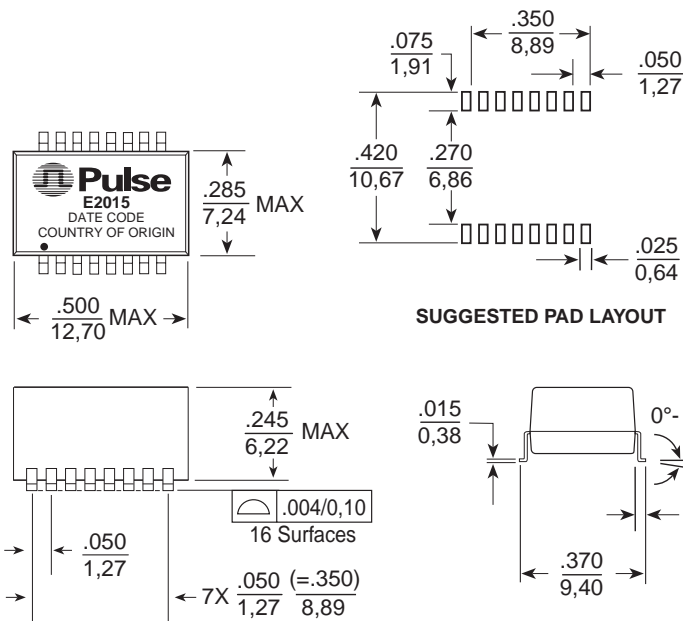

Weight 1.1 grams
Tape & Reel 600/reel
Tube 40/tube

Dimensions: Inches
mm

Unless otherwise specified, all tolerances are ± .010 / 0.25

For More Information :

UNITED STATES (Worldwide)	UNITED KINGDOM (Northern Europe)	FRANCE (Southern Europe)	SINGAPORE (Southern Asia)	TAIWAN, R.O.C. (Northern Asia)	DISTRIBUTOR
12220 World Trade Drive San Diego, CA 92128 Quick-Facts: 619 674 9672 http://www.pulseeng.com TEL: 858 674 8100 FAX: 858 674 8262	1 & 2 Huxley Road The Surrey Research Park Guildford, Surrey GU2 5RE United Kingdom TEL: 44 1483 401700 FAX: 44 1483 401701	Zone Industrielle F-39270 Orgelet France TEL: 33 3 84 35 04 04 FAX: 33 3 84 25 46 41	150 Kampong Ampat #07-01/02 KA Centre Singapore 368324 TEL: 65 287 8998 FAX: 65 280 0080	3F-4, No. 81, Sec. 1 HsinTai Wu Road Hsi-Chih, Taipei Hsien Taiwan, R.O.C. Tel: 886 2 2698 0228 FAX: 886 2 2698 0948	

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other products mentioned herein may be trademarks or registered trademarks of their respective owners.