




TYPE 2N1151/904A
BULLETIN NO. DL-S 1070 MAY 1959
REPLACES BULLETIN NO. DL-S 820 OCTOBER 1957

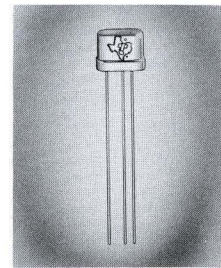

Beta From 18 to 90


Specifically designed for high gain at high temperatures

qualification testing

All units are heat cycled ten times from -65°C to $+175^{\circ}\text{C}$. The units are hermetically sealed. All units are completely tested for design characteristics and undergo a rigorous tumble test to check for mechanical reliability.

mechanical data

Metal case with glass-to-metal hermetic seal between case and leads. Unit weight is approximately 1 gram.

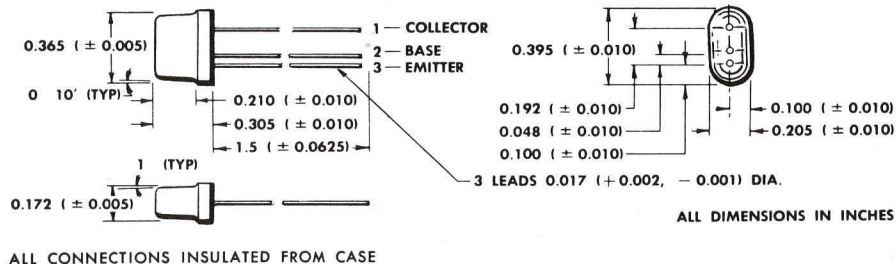

absolute maximum ratings at 25°C ambient

[except where advanced temperatures are indicated]

Collector Voltage Referred to Base	45 V
Emitter Voltage Referred to Base	1 V
Collector Current	25 mA
Emitter Current	-25 mA
Collector Dissipation	150 mW
at 100°C	100 mW
at 150°C	50 mW

junction temperature

Maximum Range -65°C to $+175^{\circ}\text{C}$

common base design characteristics at $T_j = 25^{\circ}\text{C}$

[except where advanced temperatures are indicated]

		test conditions		min.	design center	max.	unit
BV_{CB0}	Collector Breakdown Voltage	$I_C = 50\mu\text{A}$	$I_E = 0$	45	—	—	Volt
I_{CB0}	Collector Cutoff Current	$V_{CB} = 30\text{V}$	$I_E = 0$	—	—	2	μA
		$V_{CB} = 5\text{V}$	$I_E = 0$	—	—	10	μA
	at 100°C	$V_{CB} = 5\text{V}$	$I_E = 0$	—	—	50	μA
	at 150°C	$V_{CB} = 5\text{V}$	$I_E = 0$	—	—	80	μA
h_{ib}	Input Impedance	$V_{CB} = 5\text{V}$	$I_E = -1\text{mA}$	30	42	80	Ohm
h_{ob}	Output Admittance	$V_{CB} = 5\text{V}$	$I_E = -1\text{mA}$	0.0	0.4	1.2	μmho
h_{rb}	Feedback Voltage Ratio	$V_{CB} = 5\text{V}$	$I_E = -1\text{mA}$	0.0	400	1000	$\times 10^{-6}$
h_{fb}	Current Transfer Ratio	$V_{CB} = 5\text{V}$	$I_E = -1\text{mA}$	-0.948	-0.975	-0.989	—
PG_{α}	Power Gain*†	$V_{CE} = 20\text{V}$	$I_E = -2\text{mA}$	—	39	—	db
NF	Noise Figure*‡	$V_{CE} = 5\text{V}$	$I_E = -1\text{mA}$	—	20	—	db
$f_{\alpha b}$	Frequency Cutoff	$V_{CB} = 5\text{V}$	$I_E = -1\text{mA}$	8	—	—	mc
C_{ob}	Output Capacitance (1mc)	$V_{CB} = 5\text{V}$	$I_E = 0$	—	7	—	μf
R_{cs}	Saturation Resistance*	$I_B = 2.2\text{mA}$	$I_C = 5\text{mA}$	—	100	200	Ohm

*Common Emitter

† $R_g = 1\text{k}; R_L = 20\text{k}$

‡Conventional Noise—Compared to 1000 ohm resistor, 1000 cps and 1 cycle band width

TYPE 2N1151/904A

TYPICAL CHARACTERISTICS

For Additional Electrical Information See Type 2N334 Data Sheet

